




RADIATED EMISSION

Model Name : AC3-OZWH-00 Temp. : 25deg C
 Model No. : - Humi. : 45%
 Serial No. : - Date : 2001/10/2 12:40
 Points : 3 Test Equip. : R3132,ESPC
 Detector : PEAK/QP Condition : Load100% (+12V3.2A -12V3.2A
 Polarization : Hori. & Vert. +15V2.5A -15V2.5A +24V6.2A)
 Power Supply : 230V(1 Phase) 50Hz
 Limit: [EN 55022] Class B<3m>

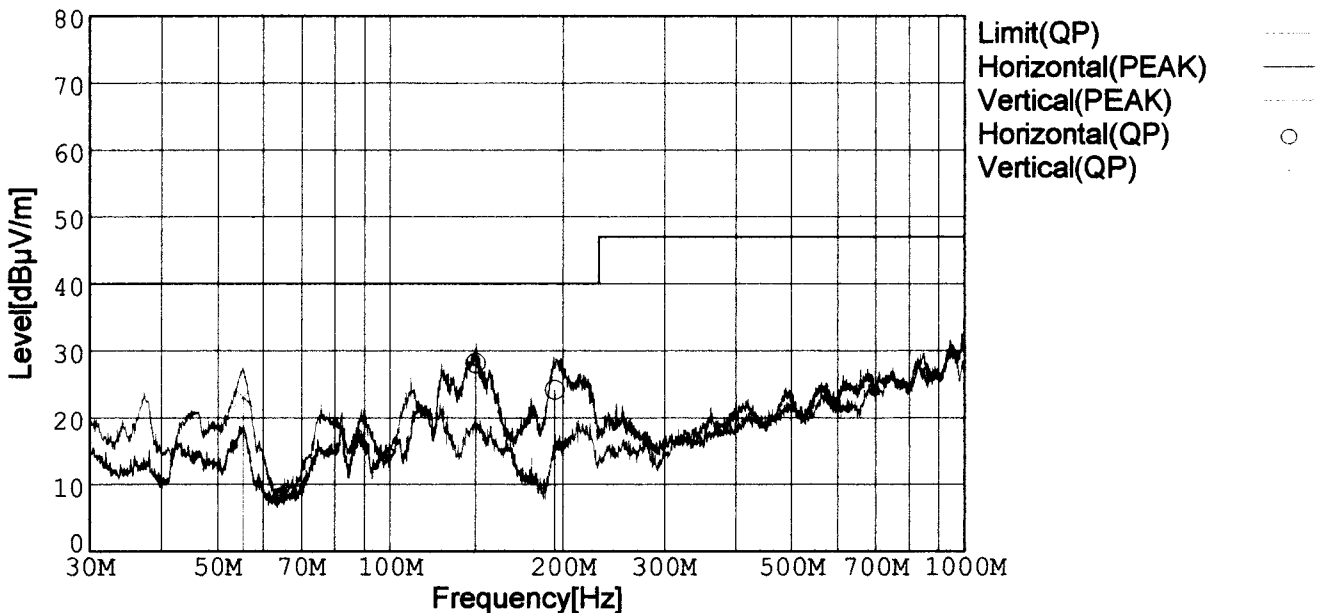

Frequency [MHz]	Meter Reading (QP) [dBµV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBµV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBµV/m]	Margin [dB]
140.859	45.6	BL	10.8	-28.3	28.1	200	156	Hori.	40.0	11.9
193.410	43.8	BL	8.4	-28.1	24.1	357	151	Hori.	40.0	15.9
55.384	44.8	BL	5.6	-27.4	23.0	181	132	Vert.	40.0	17.0

BL: Biconi-Log



LINE CONDUCTION

Model Name : AC3-OZWH-00

Model No. : -

Serial No. : -

Points : 8

Detector : PEAK/QP/Ave.

Line Mode : VA/VB

Power Supply : 230V(1 Phase) 50Hz

Limit1: [EN 55022] Class B(QP)

Limit2: [EN 55022] Class B(Ave.)


Temp. : 25deg C

Humi. : 45%

Date : 2001/10/5 17:17

Test Equip. : R3261A,ESPC

Comment : Load100% (+12V3.2A -12V3.2A
+15V2.5A -15V2.5A +24V6.2A)

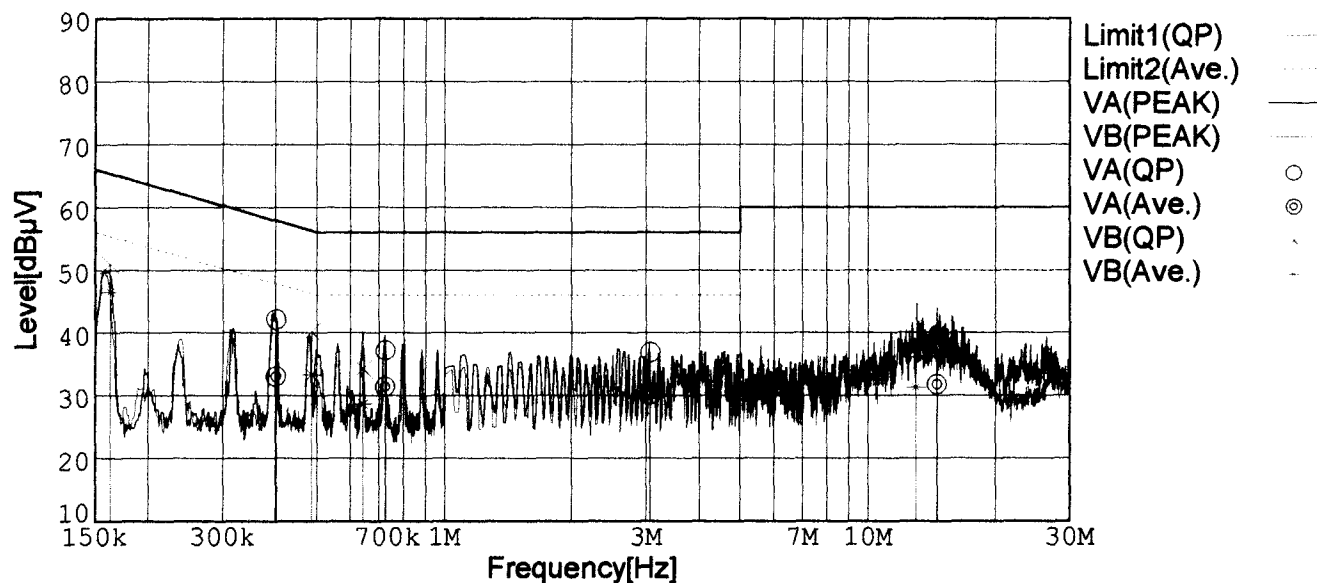

Frequency [MHz]	Meter Reading (QP) [dBµV]	Meter Reading (Ave.) [dBµV]	Factor [dB]	Level (QP) [dBµV]	Level (Ave.) [dBµV]	Line	Limit (QP) [dBµV]	Limit (Ave.) [dBµV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.1621	40.9	36.5	10.0	50.9	46.5	VB	65.4	55.4	14.5	8.9
0.4849	30.1	23.3	10.1	40.2	33.4	VB	56.3	46.3	16.1	12.9
0.7241	27.0	21.3	10.1	37.1	31.4	VA	56.0	46.0	18.9	14.6
0.4006	32.0	23.0	10.1	42.1	33.1	VA	57.9	47.9	15.8	14.8
3.0670	26.6	20.0	10.2	36.8	30.2	VA	56.0	46.0	19.2	15.8
0.6417	24.2	18.6	10.1	34.3	28.7	VB	56.0	46.0	21.7	17.3
14.5236	27.0	21.2	10.6	37.6	31.8	VA	60.0	50.0	22.4	18.2
12.9648	26.1	20.7	10.6	36.7	31.3	VB	60.0	50.0	23.3	18.7