



TEST DATA OF ZTW34812

(48.0V INPUT)

Regulated DC Power Supply

Date : Mar. 5. 1998

Approved by : N. Shiraishi
Design Manager

Prepared by : T. Tsuru
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	6
リップルノイズ	
6. Overcurrent Protection	8
過電流保護	
7. Dynamic Load Responce	9
動的負荷変動	
8. Rise and Fall Time	11
立上り、立下がり時間	
9. Ambient Temperature Drift	13
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	14
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	15
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	16
経時ドリフト	
13. Output Voltage Accuracy	17
定電圧精度	
14. Condensation	18
結露特性	
15. Figure of Testing Circuitry	20
測定回路図	

(Final Page 20)

COSEL

Model		ZTW34812		Temperature 25℃	
Item		Line Regulation 静的入力変動		Testing Circuitry Figure A	
Object		+12V0.13A			
1. Graph		-----□----- Load 50% -----△----- Load 100%			
[V]					
Output Voltage		Input Voltage [V]			

COSEL


Model ZTW34812

Item Efficiency 効率

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph

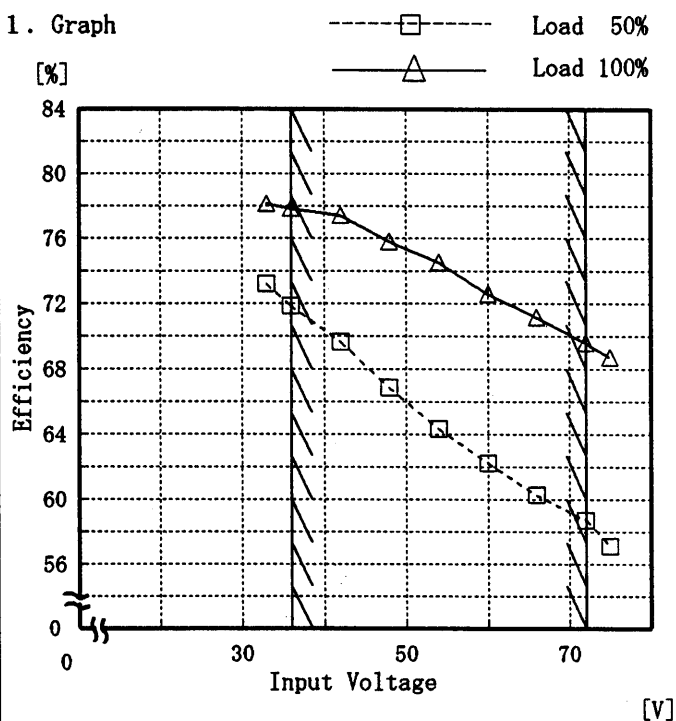



Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。


2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
33.0	73.2	78.1
36.0	71.8	77.9
42.0	69.6	77.4
48.0	66.9	75.8
54.0	64.3	74.5
60.0	62.2	72.6
66.0	60.3	71.1
72.0	58.8	69.6
75.0	57.1	68.8
—	—	—
—	—	—
—	—	—

COSEL

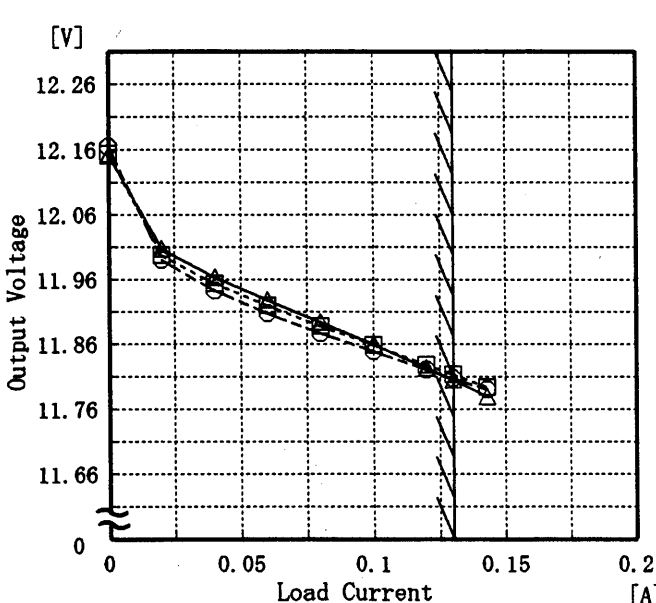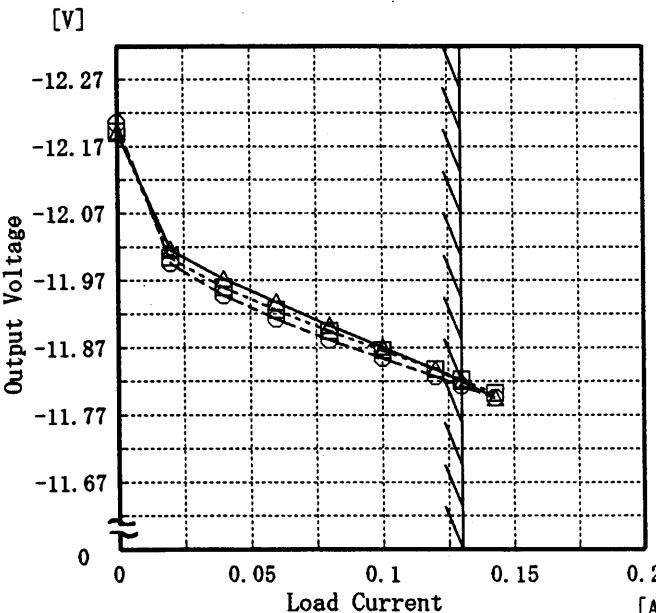Model		ZTW34812																																																
Item	Load Regulation 静的負荷変動																																																	
Object	+12V0.13A																																																	
1. Graph		2. Values																																																
<div><div><div>△</div><div>—</div><div>Input Volt. 36.0V</div></div><div><div>□</div><div>- - -</div><div>Input Volt. 48.0V</div></div><div><div>○</div><div>—</div><div>Input Volt. 72.0V</div></div></div> 		<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 36.0[V]</th><th>Input Volt. 48.0[V]</th><th>Input Volt. 72.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.000</td><td>12.152</td><td>12.154</td><td>12.165</td></tr><tr><td>0.020</td><td>12.008</td><td>11.998</td><td>11.990</td></tr><tr><td>0.040</td><td>11.964</td><td>11.954</td><td>11.942</td></tr><tr><td>0.060</td><td>11.928</td><td>11.920</td><td>11.908</td></tr><tr><td>0.080</td><td>11.895</td><td>11.889</td><td>11.877</td></tr><tr><td>0.100</td><td>11.860</td><td>11.859</td><td>11.849</td></tr><tr><td>0.120</td><td>11.823</td><td>11.828</td><td>11.821</td></tr><tr><td>0.130</td><td>11.804</td><td>11.813</td><td>11.807</td></tr><tr><td>0.143</td><td>11.779</td><td>11.794</td><td>11.790</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	12.152	12.154	12.165	0.020	12.008	11.998	11.990	0.040	11.964	11.954	11.942	0.060	11.928	11.920	11.908	0.080	11.895	11.889	11.877	0.100	11.860	11.859	11.849	0.120	11.823	11.828	11.821	0.130	11.804	11.813	11.807	0.143	11.779	11.794	11.790	—	—	—	—
Load Current [A]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.000	12.152	12.154	12.165																																															
0.020	12.008	11.998	11.990																																															
0.040	11.964	11.954	11.942																																															
0.060	11.928	11.920	11.908																																															
0.080	11.895	11.889	11.877																																															
0.100	11.860	11.859	11.849																																															
0.120	11.823	11.828	11.821																																															
0.130	11.804	11.813	11.807																																															
0.143	11.779	11.794	11.790																																															
—	—	—	—																																															
Object		-12V0.13A																																																
1. Graph		2. Values																																																
<div><div><div>△</div><div>—</div><div>Input Volt. 36.0V</div></div><div><div>□</div><div>- - -</div><div>Input Volt. 48.0V</div></div><div><div>○</div><div>—</div><div>Input Volt. 72.0V</div></div></div> 		<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 36.0[V]</th><th>Input Volt. 48.0[V]</th><th>Input Volt. 72.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.000</td><td>-12.191</td><td>-12.194</td><td>-12.205</td></tr><tr><td>0.020</td><td>-12.017</td><td>-12.006</td><td>-11.996</td></tr><tr><td>0.040</td><td>-11.973</td><td>-11.960</td><td>-11.948</td></tr><tr><td>0.060</td><td>-11.938</td><td>-11.927</td><td>-11.913</td></tr><tr><td>0.080</td><td>-11.905</td><td>-11.896</td><td>-11.883</td></tr><tr><td>0.100</td><td>-11.872</td><td>-11.867</td><td>-11.855</td></tr><tr><td>0.120</td><td>-11.838</td><td>-11.838</td><td>-11.828</td></tr><tr><td>0.130</td><td>-11.820</td><td>-11.823</td><td>-11.814</td></tr><tr><td>0.143</td><td>-11.796</td><td>-11.803</td><td>-11.796</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	-12.191	-12.194	-12.205	0.020	-12.017	-12.006	-11.996	0.040	-11.973	-11.960	-11.948	0.060	-11.938	-11.927	-11.913	0.080	-11.905	-11.896	-11.883	0.100	-11.872	-11.867	-11.855	0.120	-11.838	-11.838	-11.828	0.130	-11.820	-11.823	-11.814	0.143	-11.796	-11.803	-11.796	—	—	—	—
Load Current [A]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.000	-12.191	-12.194	-12.205																																															
0.020	-12.017	-12.006	-11.996																																															
0.040	-11.973	-11.960	-11.948																																															
0.060	-11.938	-11.927	-11.913																																															
0.080	-11.905	-11.896	-11.883																																															
0.100	-11.872	-11.867	-11.855																																															
0.120	-11.838	-11.838	-11.828																																															
0.130	-11.820	-11.823	-11.814																																															
0.143	-11.796	-11.803	-11.796																																															
—	—	—	—																																															
Note: Slanted line shows the range of the rated load current. (注)斜線は定格負荷電流範囲を示す。																																																		

COSEL

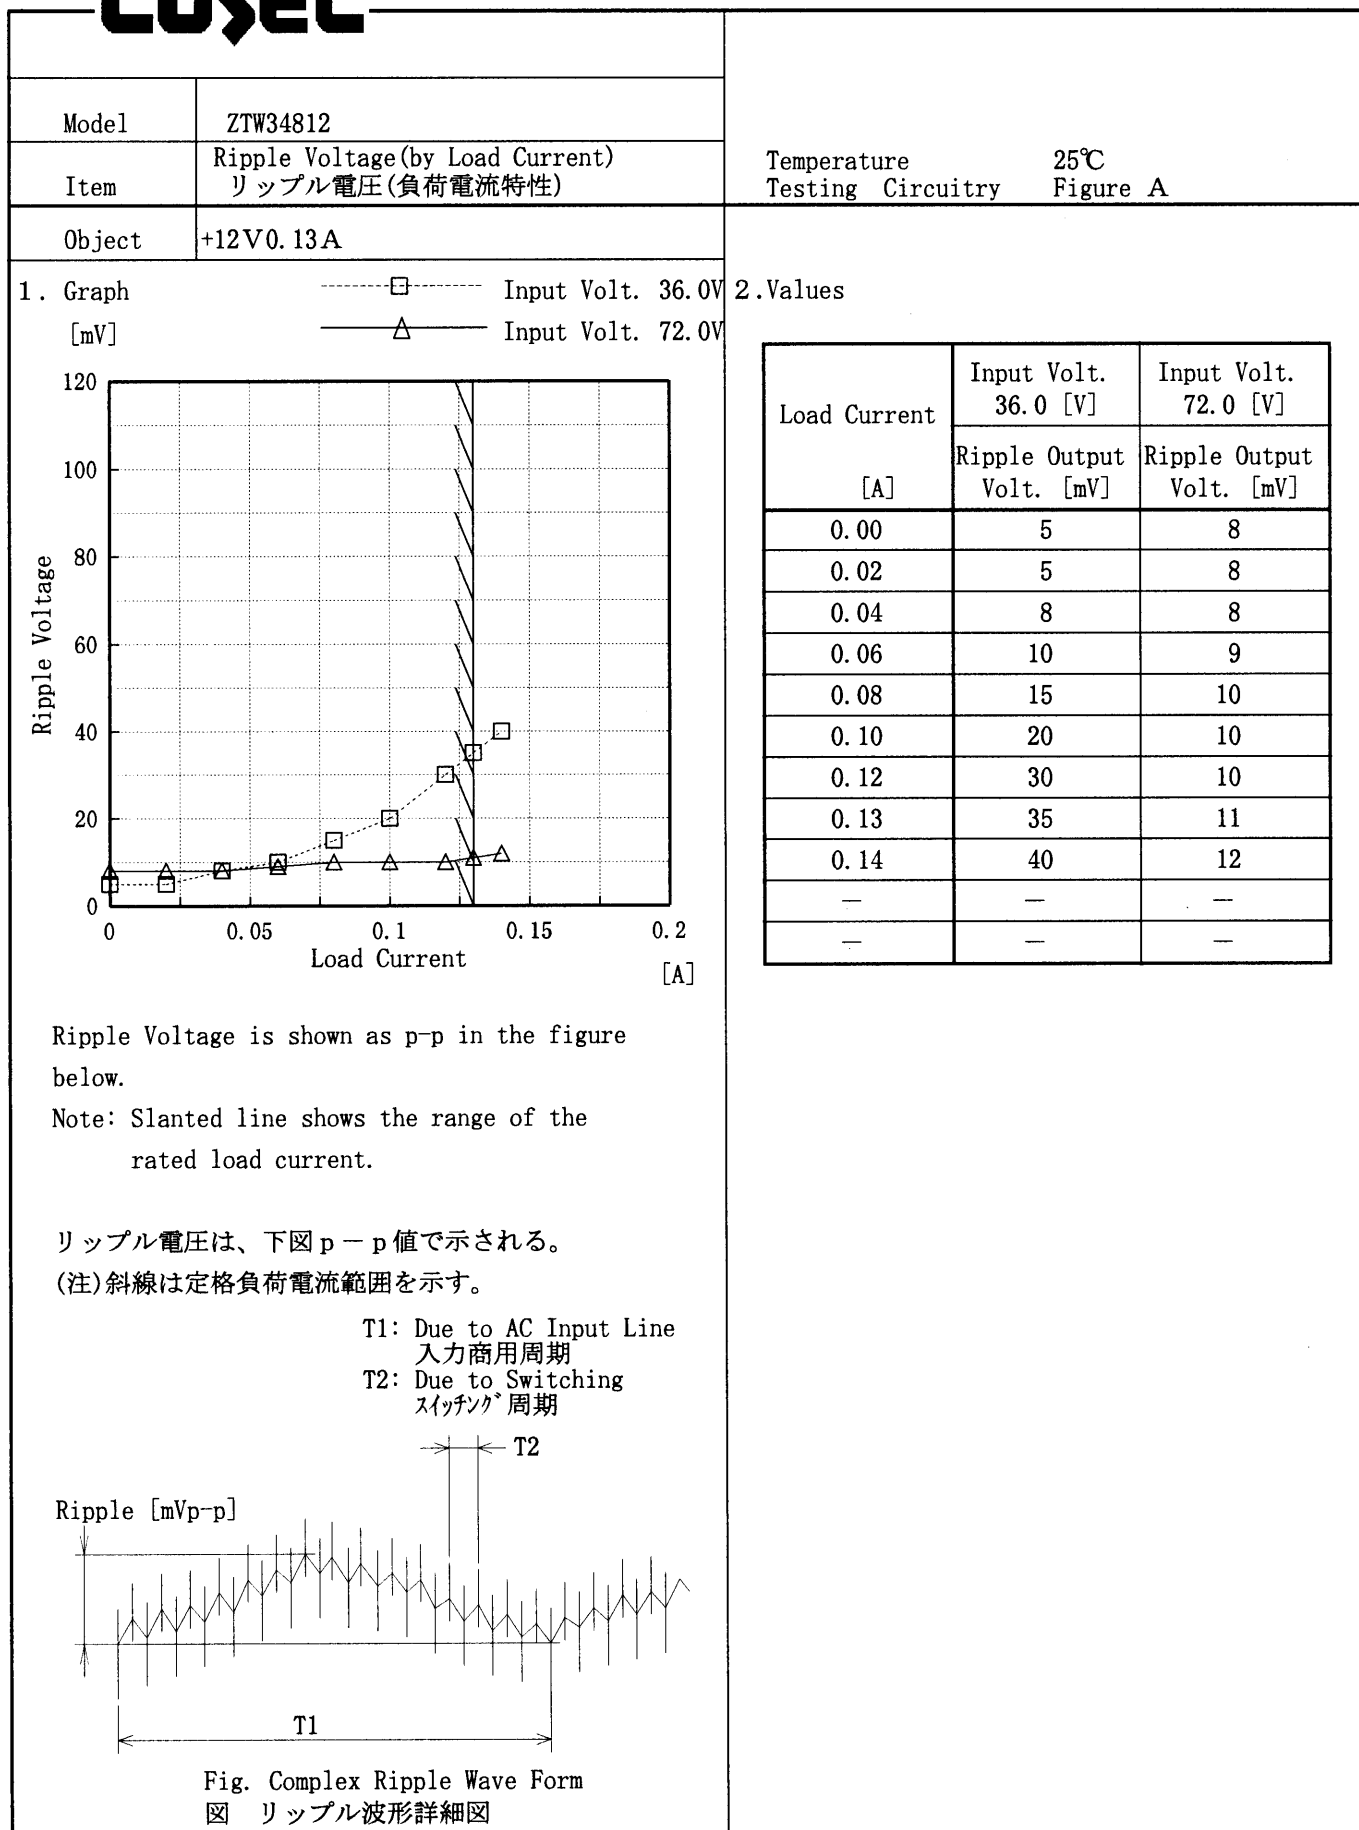

2. Values

Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	5	8
0.02	5	8
0.04	8	8
0.06	10	9
0.08	15	10
0.10	20	10
0.12	30	10
0.13	35	11
0.14	40	12
—	—	—
—	—	—

COSEL

Model		ZTW34812	
Item	Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)	Temperature	25℃
		Testing Circuitry	Figure A
Object	-12V0.13A		

1. Graph

-----□-----

Input Volt. 36.0V

-----△-----

Input Volt. 72.0V

120

100

80

60

40

20

0

Ripple Voltage

[mV]

0

0.05

0.1

0.15

0.2

Load Current

[A]

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注)斜線は定格負荷電流範囲を示す。


T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

COSEL

Model		ZTW34812	Temperature		25℃																																						
Item		Ripple-Noise リップルノイズ	Testing Circuitry		Figure A																																						
Object		+12V0.13A																																									
1. Graph			2. Values																																								
<div><div>-----□-----</div>Input Volt. 36.0V</div> <div><div>-----△-----</div>Input Volt. 72.0V</div> <div><div>[mV]</div><div>150</div><div>100</div><div>50</div><div>0</div></div> <div><div>Ripple-Noise</div><div>0</div><div>0.05</div><div>0.1</div><div>0.15</div><div>0.2</div></div> <div><div>Load Current</div><div>[A]</div></div>			<table><tr><th rowspan="2">Load current [A]</th><th>Input Volt. 36.0 [V]</th><th>Input Volt. 72.0 [V]</th></tr><tr><th>Ripple-Noise [mV]</th><th>Ripple-Noise [mV]</th></tr><tr><td>0.00</td><td>25</td><td>30</td></tr><tr><td>0.02</td><td>30</td><td>30</td></tr><tr><td>0.04</td><td>30</td><td>30</td></tr><tr><td>0.06</td><td>30</td><td>35</td></tr><tr><td>0.08</td><td>30</td><td>35</td></tr><tr><td>0.10</td><td>35</td><td>35</td></tr><tr><td>0.12</td><td>35</td><td>40</td></tr><tr><td>0.13</td><td>35</td><td>40</td></tr><tr><td>0.14</td><td>40</td><td>40</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>			Load current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	25	30	0.02	30	30	0.04	30	30	0.06	30	35	0.08	30	35	0.10	35	35	0.12	35	40	0.13	35	40	0.14	40	40	—	—	—	—	—	—
Load current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]																																									
	Ripple-Noise [mV]	Ripple-Noise [mV]																																									
0.00	25	30																																									
0.02	30	30																																									
0.04	30	30																																									
0.06	30	35																																									
0.08	30	35																																									
0.10	35	35																																									
0.12	35	40																																									
0.13	35	40																																									
0.14	40	40																																									
—	—	—																																									
—	—	—																																									
<p>Ripple-Noise is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。</p> <p>(注)斜線は定格負荷電流範囲を示す。</p> <div><div>T1: Due to AC Input Line 入力商用周期</div><div>T2: Due to Switching スイッチング周期</div><div><div><div>T2</div><div>Ripple-Noise [mVp-p]</div></div><div><div>T1</div></div></div></div>																																											
<p>Fig. Complex Ripple Wave Form</p> <p>図 リップル波形詳細図</p>																																											

COSEL

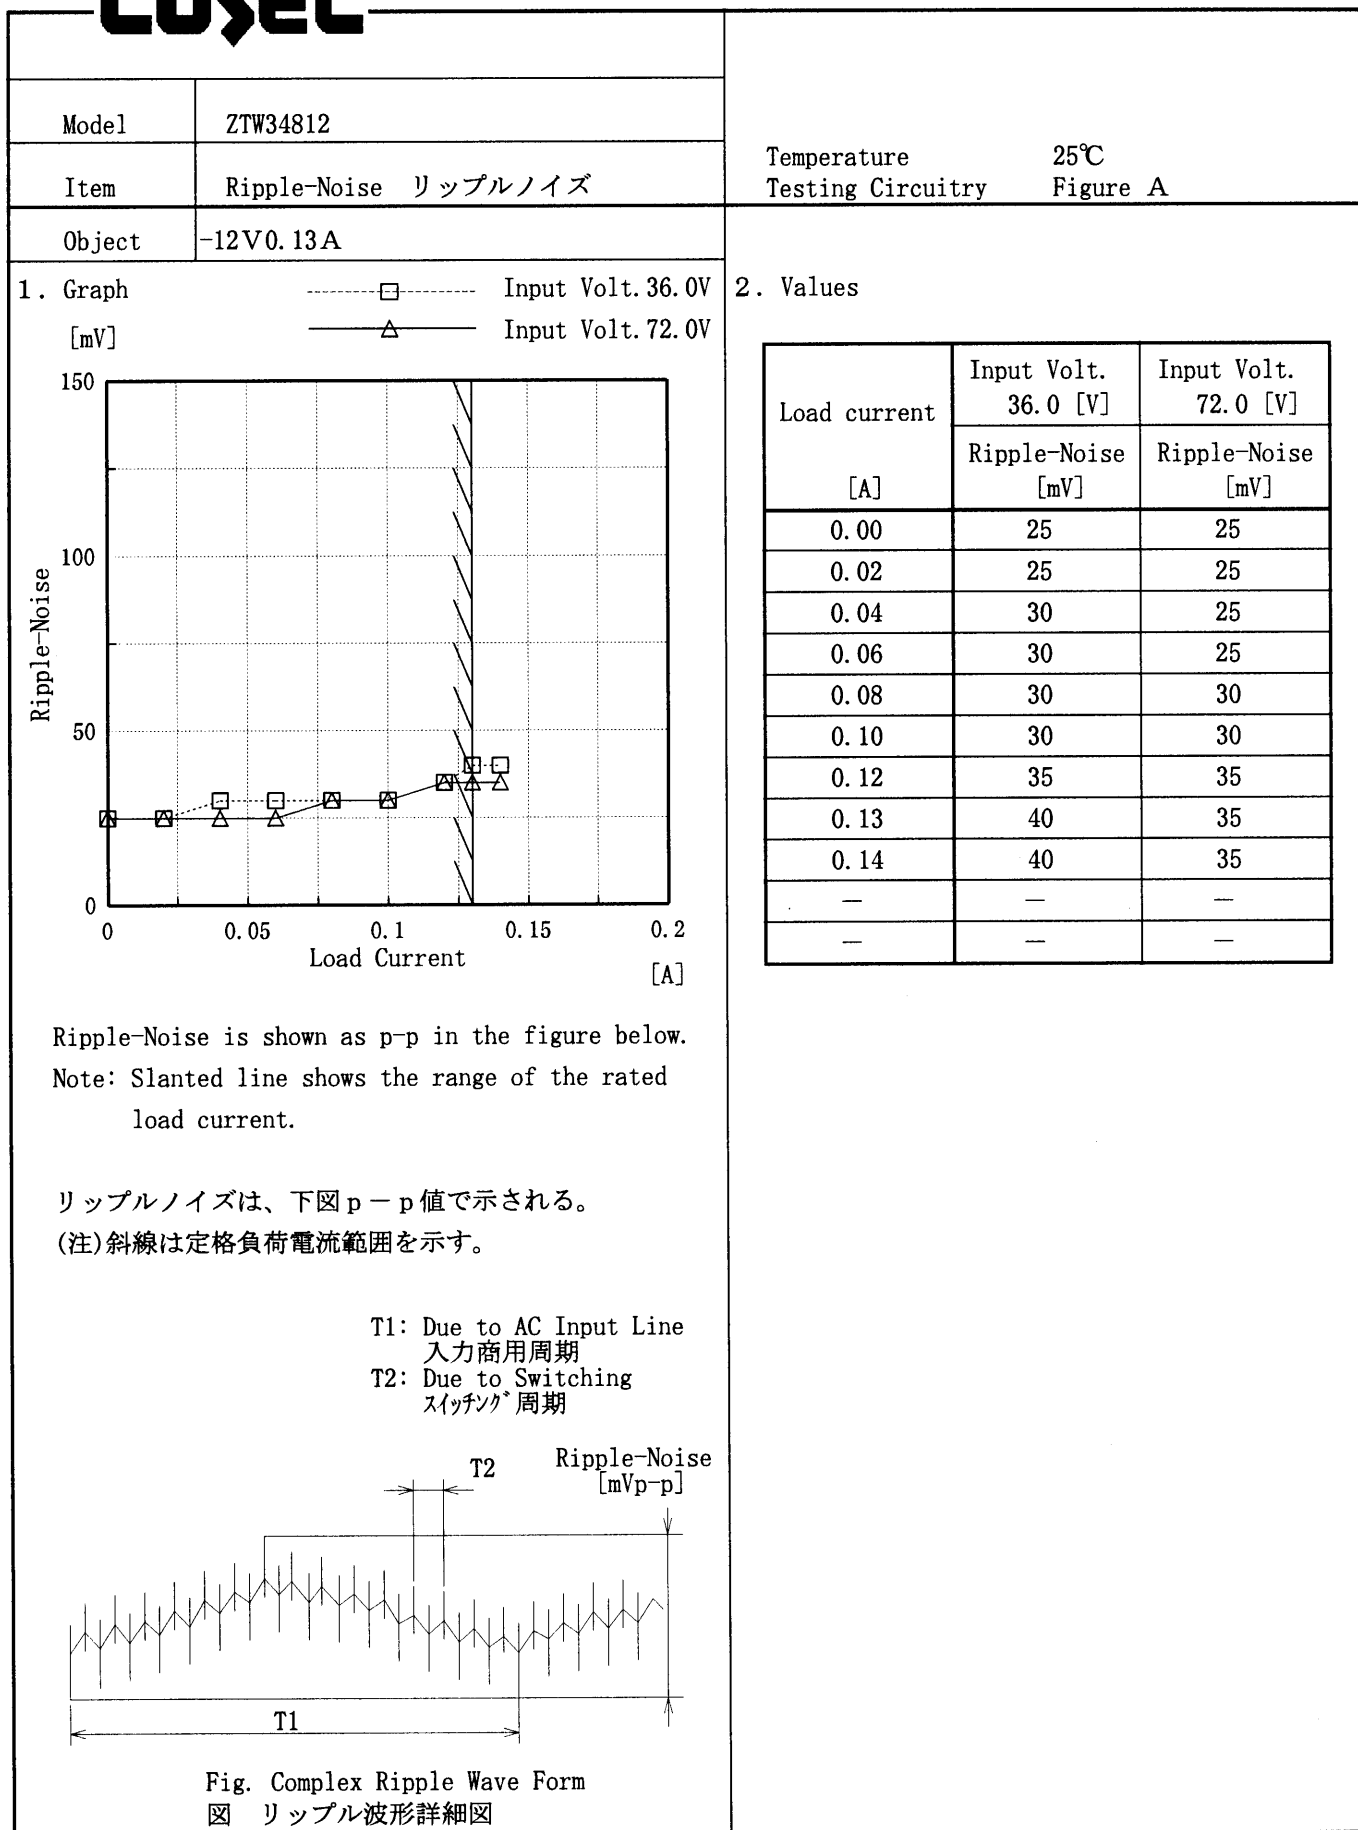

COSEL

Model ZTW34812		Temperature 25°C Testing Circuitry Figure A																																																					
Item	Overcurrent Protection 過電流保護																																																						
Object	+12V0.13A																																																						
1. Graph <div style="display: flex; align-items: center;"> <div style="flex: 1;"> </div> <div style="flex: 0.5;"> <p>..... Input Volt. 36.0 V</p> <p>———— Input Volt. 48.0 V</p> <p>———— Input Volt. 72.0 V</p> </div> </div>		2. Values <table border="1"> <thead> <tr> <th>Output Voltage [V]</th><th>Input Volt. 36.0[V] Load Current [A]</th><th>Input Volt. 48.0[V] Load Current [A]</th><th>Input Volt. 72.0[V] Load Current [A]</th></tr> </thead> <tbody> <tr><td>12.00</td><td>0.036</td><td>0.030</td><td>0.025</td></tr> <tr><td>11.40</td><td>0.241</td><td>0.280</td><td>0.220</td></tr> <tr><td>10.80</td><td>0.251</td><td>0.285</td><td>0.223</td></tr> <tr><td>9.60</td><td>0.268</td><td>0.298</td><td>0.230</td></tr> <tr><td>8.40</td><td>0.284</td><td>0.308</td><td>0.233</td></tr> <tr><td>7.20</td><td>0.298</td><td>0.313</td><td>0.237</td></tr> <tr><td>6.00</td><td>0.306</td><td>0.312</td><td>0.236</td></tr> <tr><td>4.80</td><td>0.309</td><td>0.305</td><td>0.234</td></tr> <tr><td>3.60</td><td>0.305</td><td>0.287</td><td>0.229</td></tr> <tr><td>2.40</td><td>0.287</td><td>0.262</td><td>0.223</td></tr> <tr><td>1.20</td><td>0.262</td><td>0.236</td><td>0.224</td></tr> <tr><td>0.00</td><td>0.263</td><td>0.262</td><td>0.281</td></tr> </tbody> </table>		Output Voltage [V]	Input Volt. 36.0[V] Load Current [A]	Input Volt. 48.0[V] Load Current [A]	Input Volt. 72.0[V] Load Current [A]	12.00	0.036	0.030	0.025	11.40	0.241	0.280	0.220	10.80	0.251	0.285	0.223	9.60	0.268	0.298	0.230	8.40	0.284	0.308	0.233	7.20	0.298	0.313	0.237	6.00	0.306	0.312	0.236	4.80	0.309	0.305	0.234	3.60	0.305	0.287	0.229	2.40	0.287	0.262	0.223	1.20	0.262	0.236	0.224	0.00	0.263	0.262	0.281
Output Voltage [V]	Input Volt. 36.0[V] Load Current [A]	Input Volt. 48.0[V] Load Current [A]	Input Volt. 72.0[V] Load Current [A]																																																				
12.00	0.036	0.030	0.025																																																				
11.40	0.241	0.280	0.220																																																				
10.80	0.251	0.285	0.223																																																				
9.60	0.268	0.298	0.230																																																				
8.40	0.284	0.308	0.233																																																				
7.20	0.298	0.313	0.237																																																				
6.00	0.306	0.312	0.236																																																				
4.80	0.309	0.305	0.234																																																				
3.60	0.305	0.287	0.229																																																				
2.40	0.287	0.262	0.223																																																				
1.20	0.262	0.236	0.224																																																				
0.00	0.263	0.262	0.281																																																				
Object -12V0.13A		2. Values <table border="1"> <thead> <tr> <th>Output Voltage [V]</th><th>Input Volt. 36.0[V] Load Current [A]</th><th>Input Volt. 48.0[V] Load Current [A]</th><th>Input Volt. 72.0[V] Load Current [A]</th></tr> </thead> <tbody> <tr><td>-12.00</td><td>0.111</td><td>0.110</td><td>0.102</td></tr> <tr><td>-11.40</td><td>0.243</td><td>0.281</td><td>0.223</td></tr> <tr><td>-10.80</td><td>0.253</td><td>0.288</td><td>0.226</td></tr> <tr><td>-9.60</td><td>0.271</td><td>0.300</td><td>0.232</td></tr> <tr><td>-8.40</td><td>0.287</td><td>0.309</td><td>0.237</td></tr> <tr><td>-7.20</td><td>0.301</td><td>0.315</td><td>0.239</td></tr> <tr><td>-6.00</td><td>0.310</td><td>0.315</td><td>0.239</td></tr> <tr><td>-4.80</td><td>0.313</td><td>0.308</td><td>0.237</td></tr> <tr><td>-3.60</td><td>0.308</td><td>0.290</td><td>0.233</td></tr> <tr><td>-2.40</td><td>0.292</td><td>0.267</td><td>0.229</td></tr> <tr><td>-1.20</td><td>0.267</td><td>0.241</td><td>0.229</td></tr> <tr><td>0.00</td><td>0.254</td><td>0.249</td><td>0.265</td></tr> </tbody> </table>		Output Voltage [V]	Input Volt. 36.0[V] Load Current [A]	Input Volt. 48.0[V] Load Current [A]	Input Volt. 72.0[V] Load Current [A]	-12.00	0.111	0.110	0.102	-11.40	0.243	0.281	0.223	-10.80	0.253	0.288	0.226	-9.60	0.271	0.300	0.232	-8.40	0.287	0.309	0.237	-7.20	0.301	0.315	0.239	-6.00	0.310	0.315	0.239	-4.80	0.313	0.308	0.237	-3.60	0.308	0.290	0.233	-2.40	0.292	0.267	0.229	-1.20	0.267	0.241	0.229	0.00	0.254	0.249	0.265
Output Voltage [V]	Input Volt. 36.0[V] Load Current [A]	Input Volt. 48.0[V] Load Current [A]	Input Volt. 72.0[V] Load Current [A]																																																				
-12.00	0.111	0.110	0.102																																																				
-11.40	0.243	0.281	0.223																																																				
-10.80	0.253	0.288	0.226																																																				
-9.60	0.271	0.300	0.232																																																				
-8.40	0.287	0.309	0.237																																																				
-7.20	0.301	0.315	0.239																																																				
-6.00	0.310	0.315	0.239																																																				
-4.80	0.313	0.308	0.237																																																				
-3.60	0.308	0.290	0.233																																																				
-2.40	0.292	0.267	0.229																																																				
-1.20	0.267	0.241	0.229																																																				
0.00	0.254	0.249	0.265																																																				
1. Graph <div style="display: flex; align-items: center;"> <div style="flex: 1;"> </div> <div style="flex: 0.5;"> <p>..... Input Volt. 36.0 V</p> <p>———— Input Volt. 48.0 V</p> <p>———— Input Volt. 72.0 V</p> </div> </div>																																																							
Note: Slanted line shows the range of the rated load current. (注)斜線は定格負荷電流範囲を示す。																																																							

COSEL

Model	ZTW34812	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	+12V0.13A	

Input Volt. 48.0 V



Cycle 100 mS

Load Current

Min. Load ←→

Load 100 %



200 mV/div

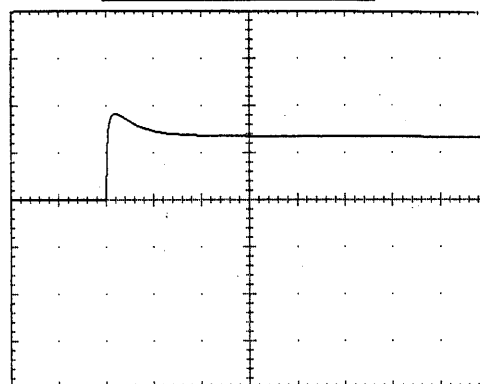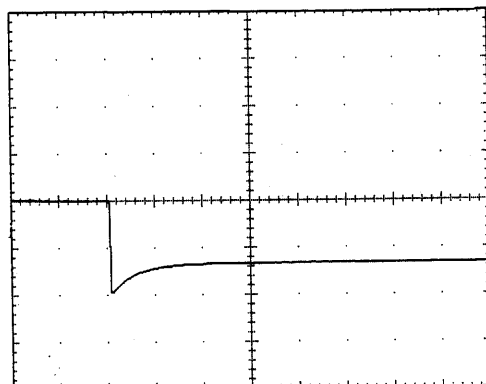

Min. Load ←→

Load 50 %



200 mV/div

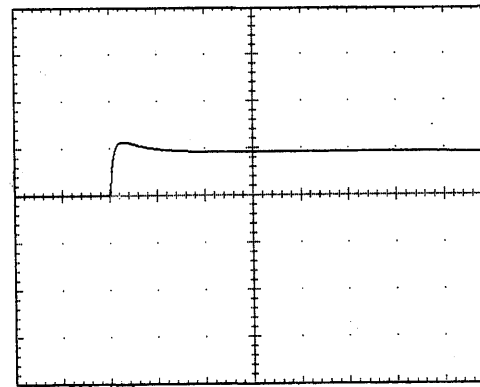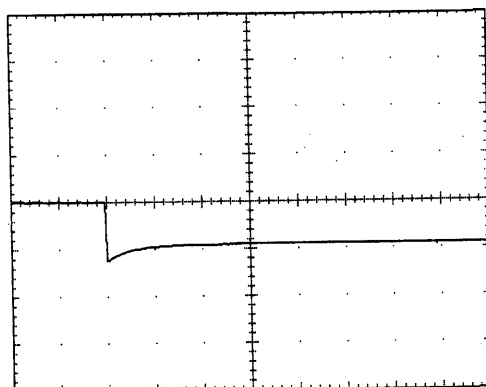

Load 50%←→

Load 100 %

200 mV/div

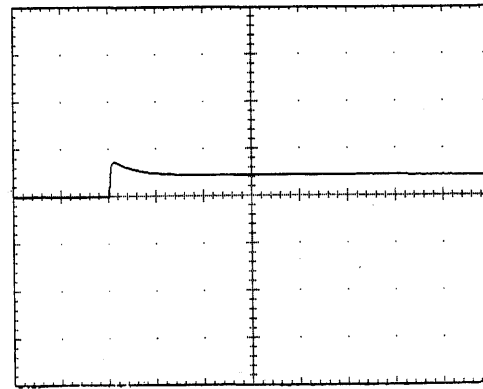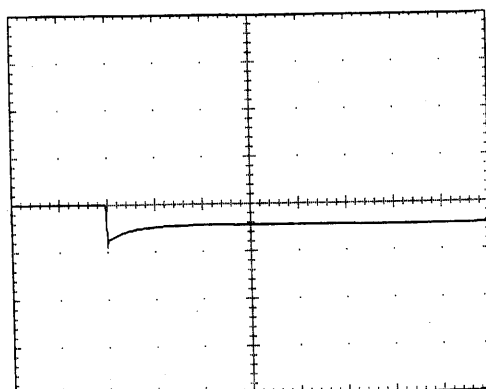

1 mS/div

COSEL

Model	ZTW34812	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	-12V0.13A	

Input Volt. 48.0 V


Cycle 100 mS

Load Current

Min. Load ←→

Load 100 %


200 mV/div

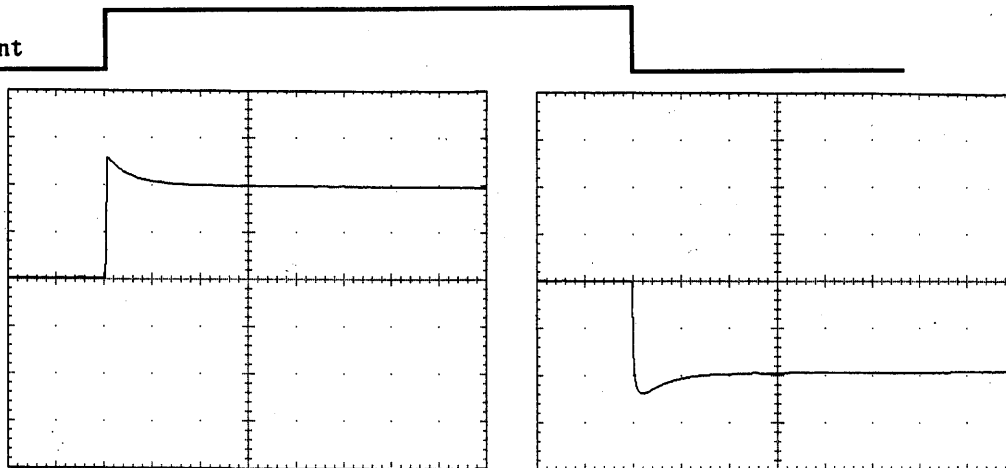

Min. Load ←→

Load 50 %


200 mV/div

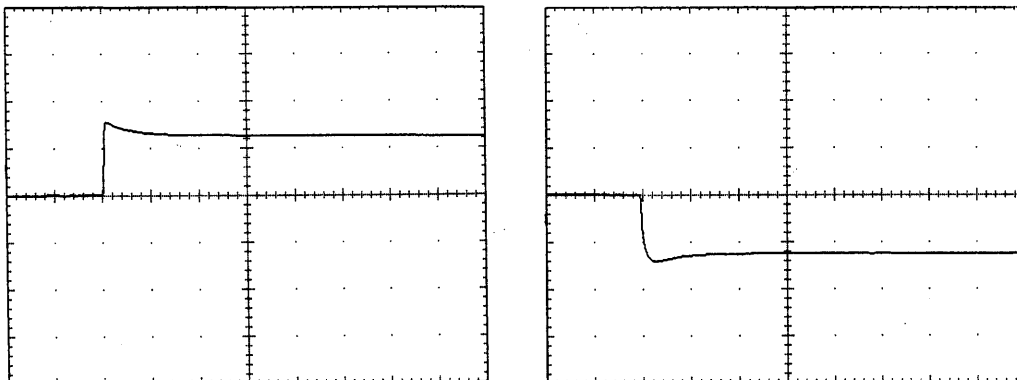

Load 50%←→

Load 100 %

200 mV/div

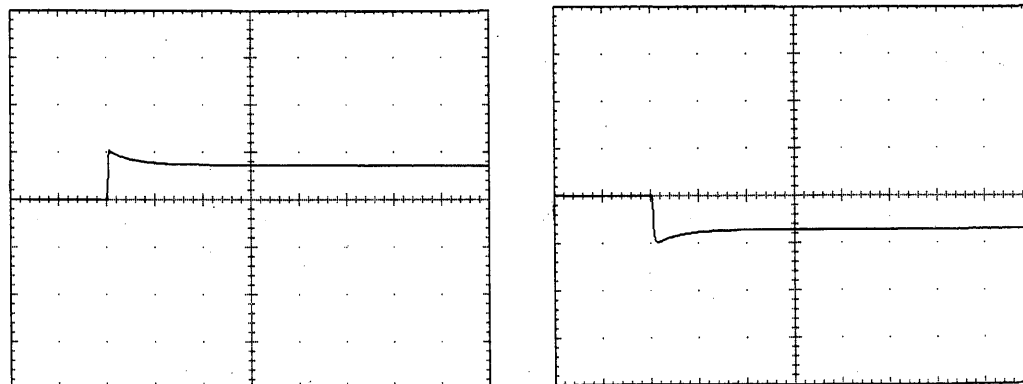

1 mS/div

COSEL

Model ZTW34812


Item Rise and Fall Time 立上り、立下り時間

Object +12V0.13A

Temperature 25°C
Testing Circuitry Figure A

1. Graph


Input Volt. 36.0 V

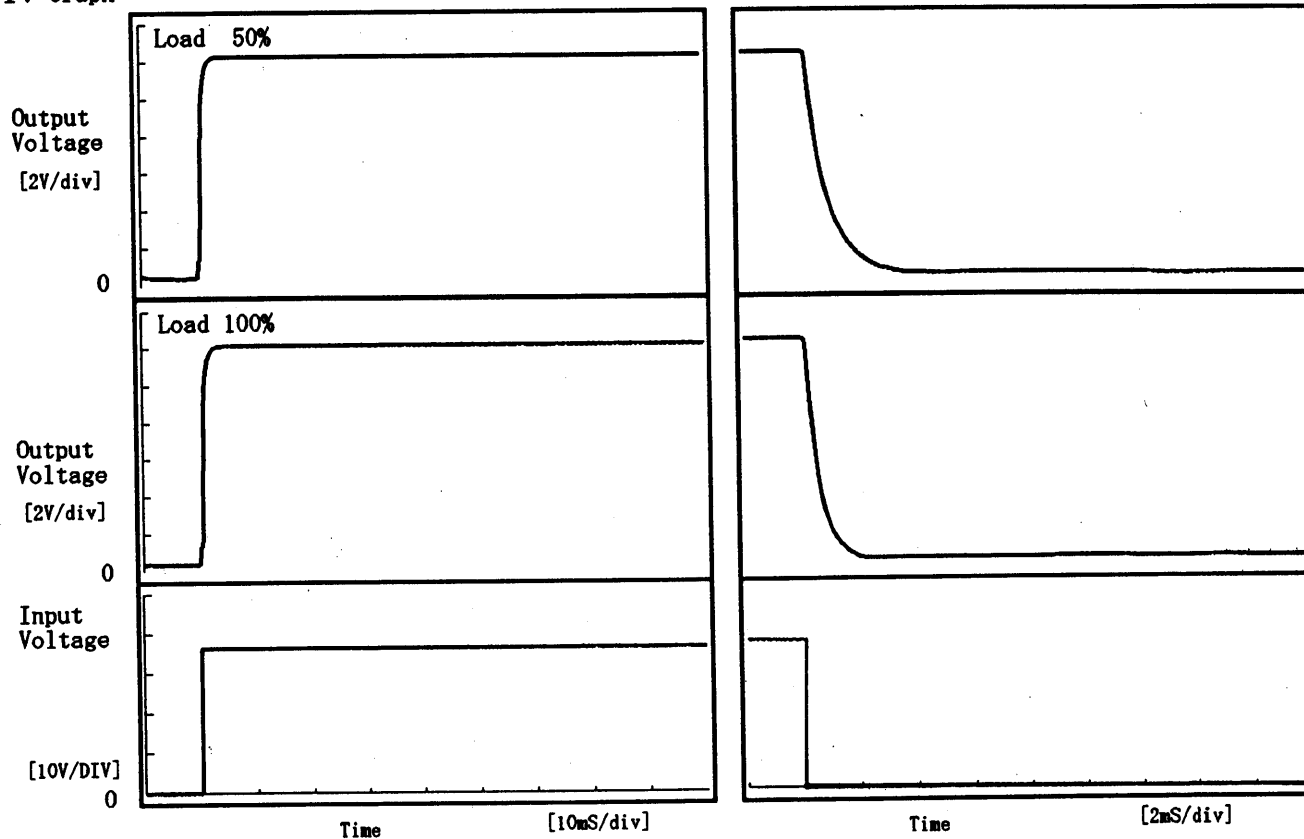

2. Values

[ms]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.45	0.80	1.25	0.28	1.86
100 %	0.45	0.90	1.35	0.19	1.08

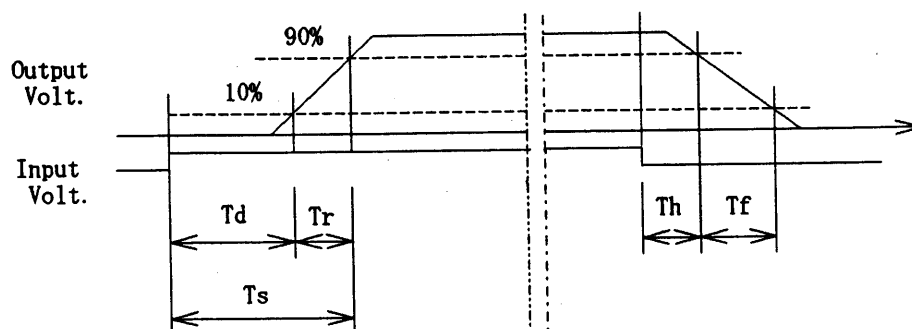

COSEL

Model ZTW34812


Item Rise and Fall Time 立上り、立下り時間

Object -12V0.13A

Temperature 25°C
Testing Circuitry Figure A

1. Graph


Input Volt. 36.0 V

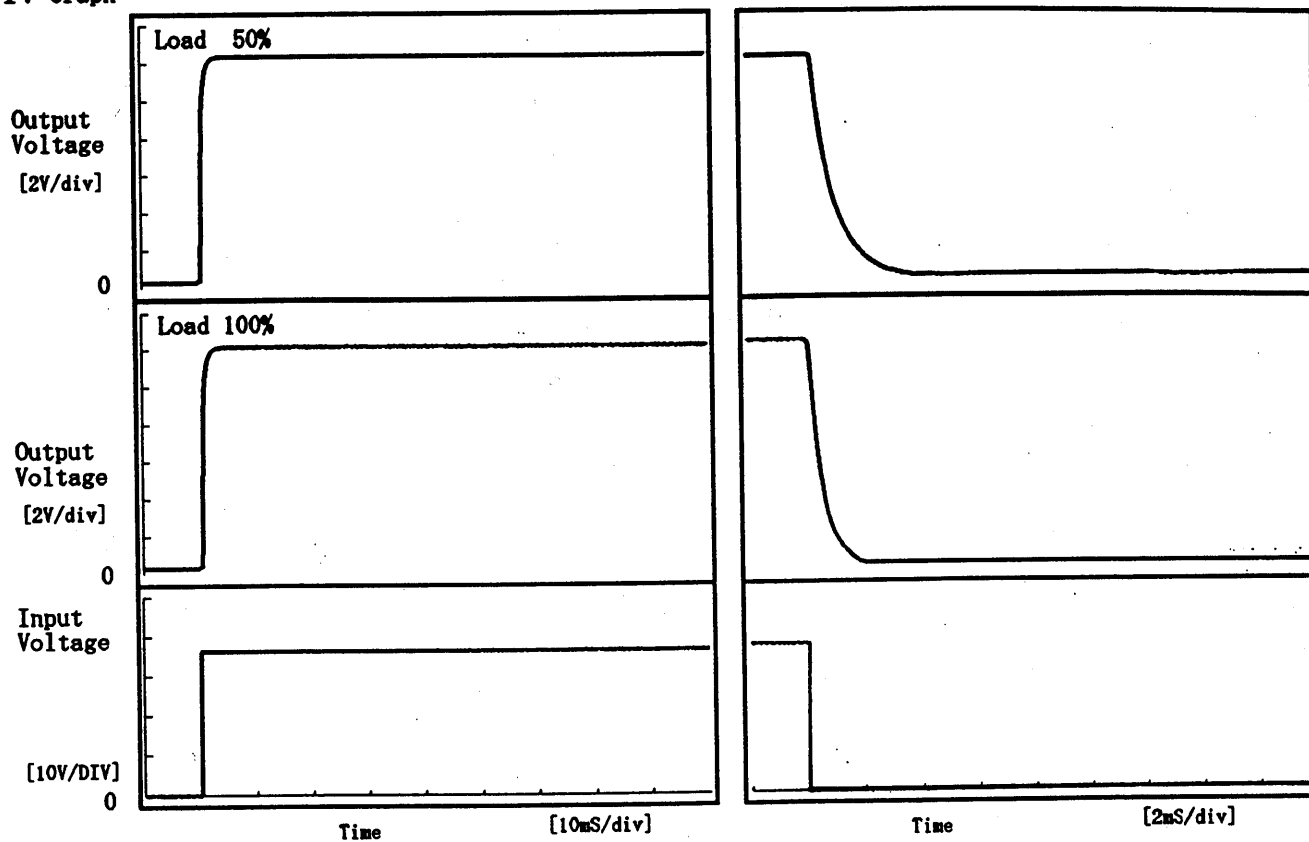

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.45	0.80	1.25	0.28	1.83
100 %	0.45	0.90	1.35	0.19	1.05

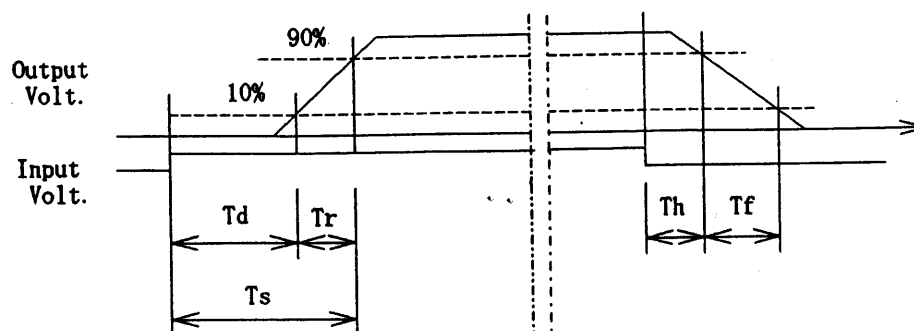

COSEL

Model

ZTW34812

Item


Ambient Temperature Drift
周囲温度変動

Object

+12V0.13A

Testing Circuitry Figure A

1. Graph

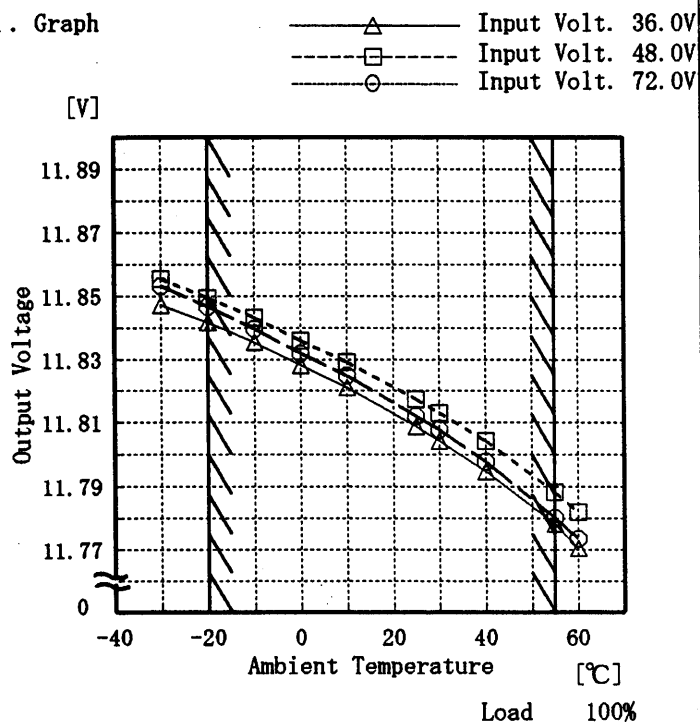


2. Values

Temperature [°C]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	11.847	11.855	11.853
-20	11.842	11.849	11.847
-10	11.835	11.843	11.840
0	11.828	11.836	11.832
10	11.821	11.829	11.825
25	11.809	11.817	11.812
30	11.804	11.813	11.808
40	11.795	11.804	11.798
55	11.778	11.788	11.780
60	11.770	11.782	11.773
—	—	—	—

Object

-12V0.13A

1. Graph

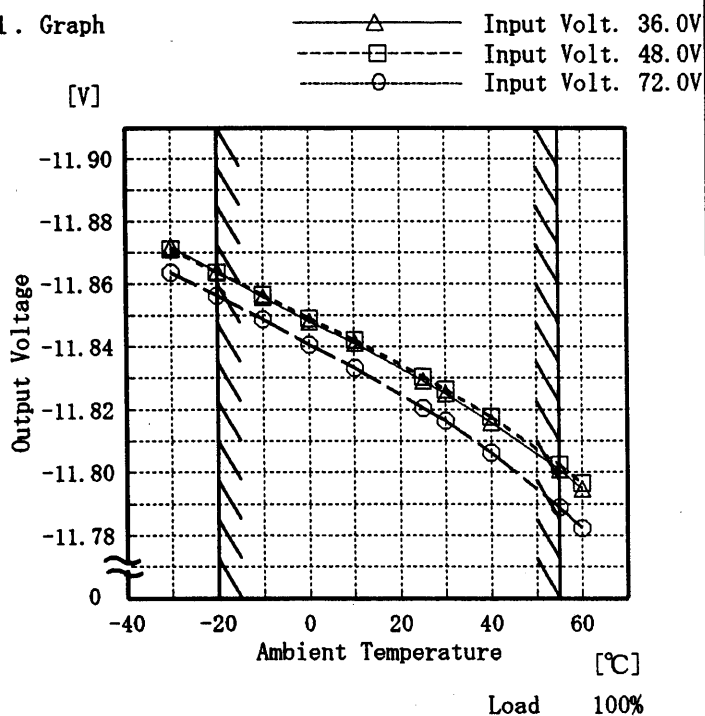

2. Values

Temperature [°C]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	-11.872	-11.871	-11.864
-20	-11.864	-11.864	-11.856
-10	-11.856	-11.856	-11.849
0	-11.848	-11.849	-11.841
10	-11.841	-11.842	-11.833
25	-11.829	-11.830	-11.820
30	-11.825	-11.826	-11.816
40	-11.816	-11.817	-11.806
55	-11.801	-11.802	-11.789
60	-11.795	-11.797	-11.782
—	—	—	—

Note: Slanted line shows the range of the rated
ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

COSEL

Model

ZTW34812

Item

Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧


Object

+12V0.13A

1. Graph

[V]

-----□----- Load 50%
-----△----- Load 100%

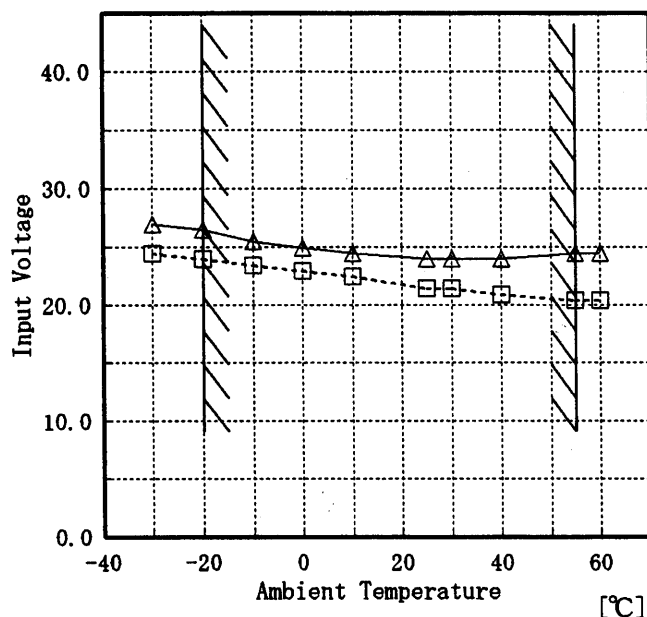

Testing Circuitry Figure A

2. Values


Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	24.4	26.9
-20	23.9	26.4
-10	23.4	25.4
0	22.9	24.9
10	22.4	24.4
25	21.4	23.9
30	21.4	23.9
40	20.9	23.9
55	20.4	24.4
60	20.4	24.4
—	—	—

Object

-12V0.13A

[V]

-----□----- Load 50%
-----△----- Load 100%

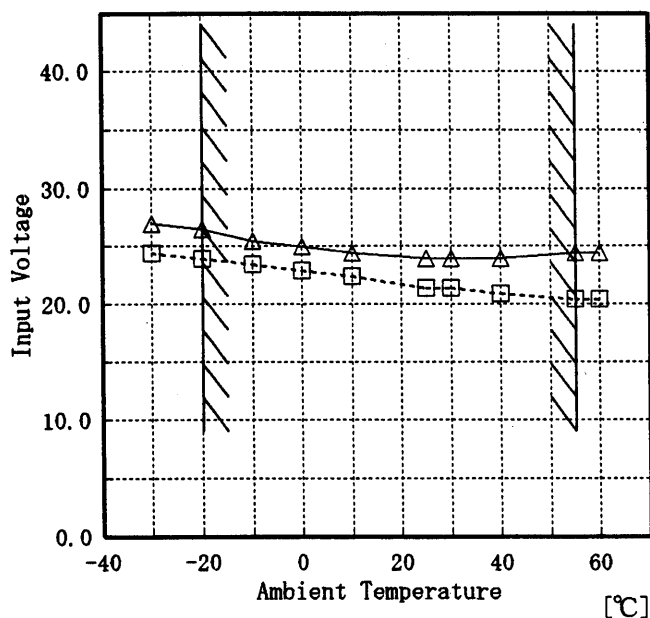


2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	24.4	26.9
-20	23.9	26.4
-10	23.4	25.4
0	22.9	24.9
10	22.4	24.4
25	21.4	23.9
30	21.4	23.9
40	20.9	23.9
55	20.4	24.4
60	20.4	24.4
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

COSEL

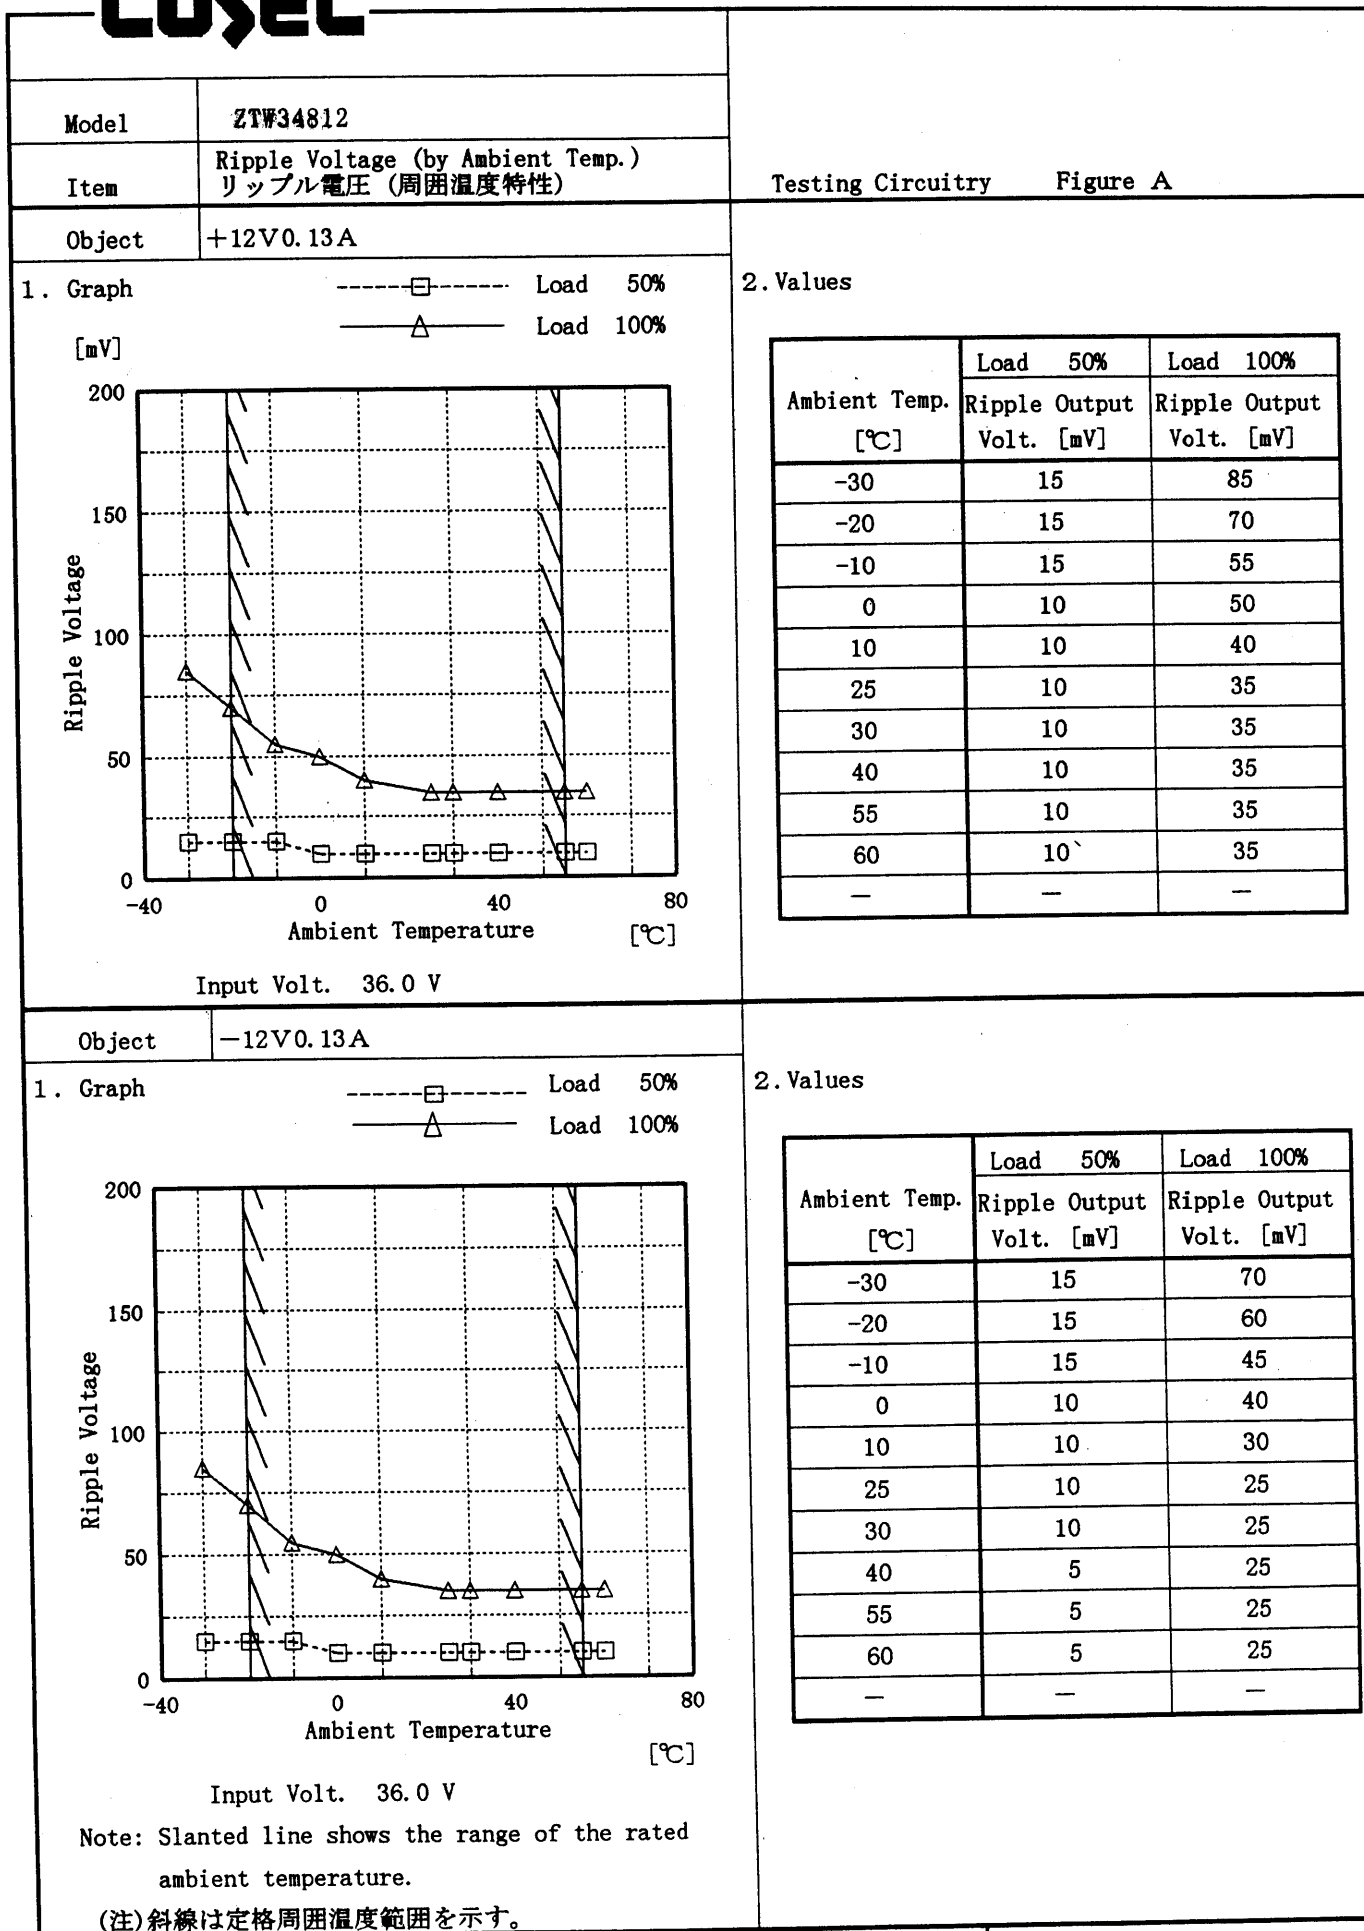

COSEL


Model ZTW34812

Item Time Lapse Drift 経時ドリフト

Object +12V0.13A

Temperature 25 °C
Testing Circuitry Figure A

1. Graph

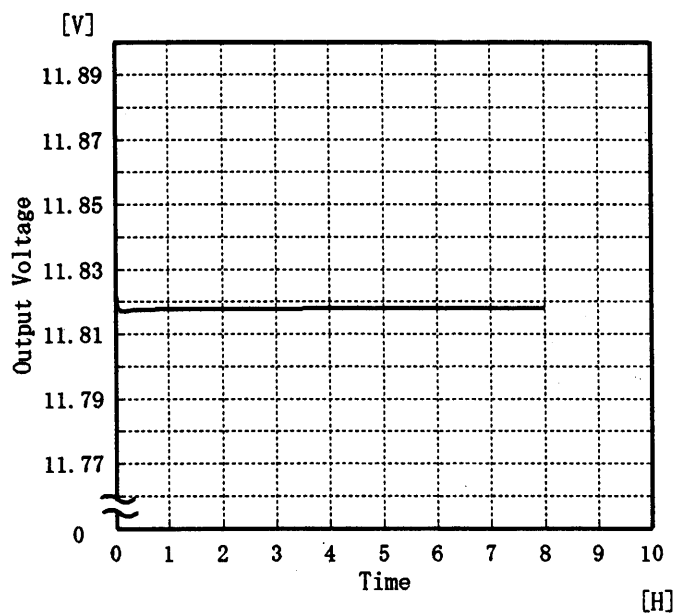


2. Values

Time since start [H]	Output Voltage [V]
0.0	11.823
0.5	11.818
1.0	11.818
2.0	11.818
3.0	11.818
4.0	11.818
5.0	11.818
6.0	11.818
7.0	11.818
8.0	11.818

Object -12V0.13A

1. Graph

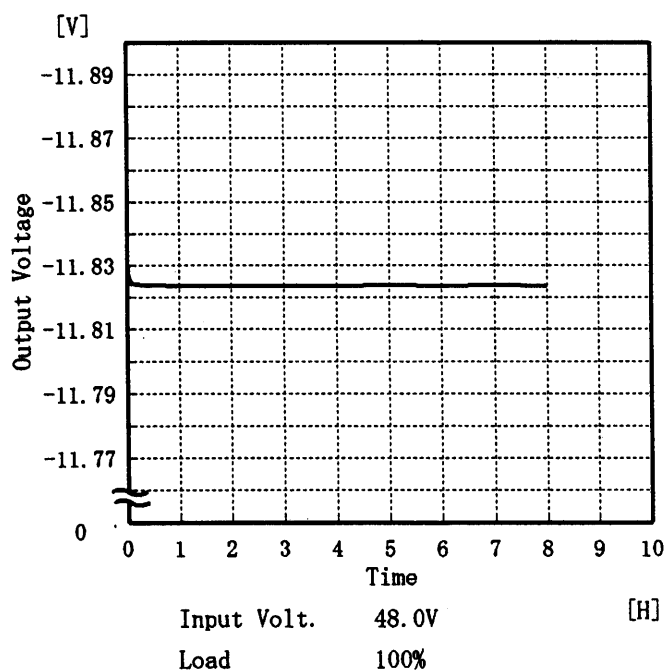

2. Values

Time since start [H]	Output Voltage [V]
0.0	-11.832
0.5	-11.824
1.0	-11.824
2.0	-11.824
3.0	-11.824
4.0	-11.824
5.0	-11.824
6.0	-11.824
7.0	-11.824
8.0	-11.824

COSEL

Model	ZTW34812		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+12V0.13A		
<p>1. Condensation test</p> <p>Testing procedure is as follows.</p> <p>① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.</p> <p>② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.</p> <p>③ Testing electrical characteristics of the unit to confirm there be no fault.</p>			
<p>1. 結露特性試験</p> <p>入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。</p>			

2. Values		
Item	Data	Testing Conditions
Output Voltage [V]	11.858	Input Volt. : 48V, Load Current:0.13A
Line Regulation [mV]	6	Input Volt. : 36~72V, Load Current:0.13A
Load Regulation [mV]	404	Input Volt. : 48V, Load Current:0~0.13A

COSEL

		Testing Circuitry Figure A
Model	ZTW34812	
Item	Condensation 結露特性	
Object	−12V0.13A	

1. Condensation test

Testing procedure is as follows.

① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.

② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.

③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で−10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values		
Item	Data	Testing Conditions
Output Voltage [V]	-11.859	Input Volt.: 48V, Load Current:0.13A
Line Regulation [mV]	7	Input Volt.: 36~72V, Load Current:0.13A
Load Regulation [mV]	394	Input Volt.: 48V, Load Current:0~0.13A

− 19 −

BC-3144

COSEL

