




RADIATED EMISSION

Model Name	: AC4-CEHQV-00	Humi.	: 40%
Model No.	: -	Date	: 2002/11/13 16:12
Serial No.	: -	Test Equip.	: R3132,ESPC
Points	: 3	Comment	: Load 100%
Detector	: PEAK/QP	C:5V 18A E:12V7.5A H:24V 3.75A	
Polarization	: Hori. & Vert.	Q:+12V 3.75A -12V 3.75A	
Power Supply	: 230V (1Phase) 50Hz	V:+15V 3A -15V 3A	
Temp.	: 25degC		

Limit: [EN 55022] Class B<3m>

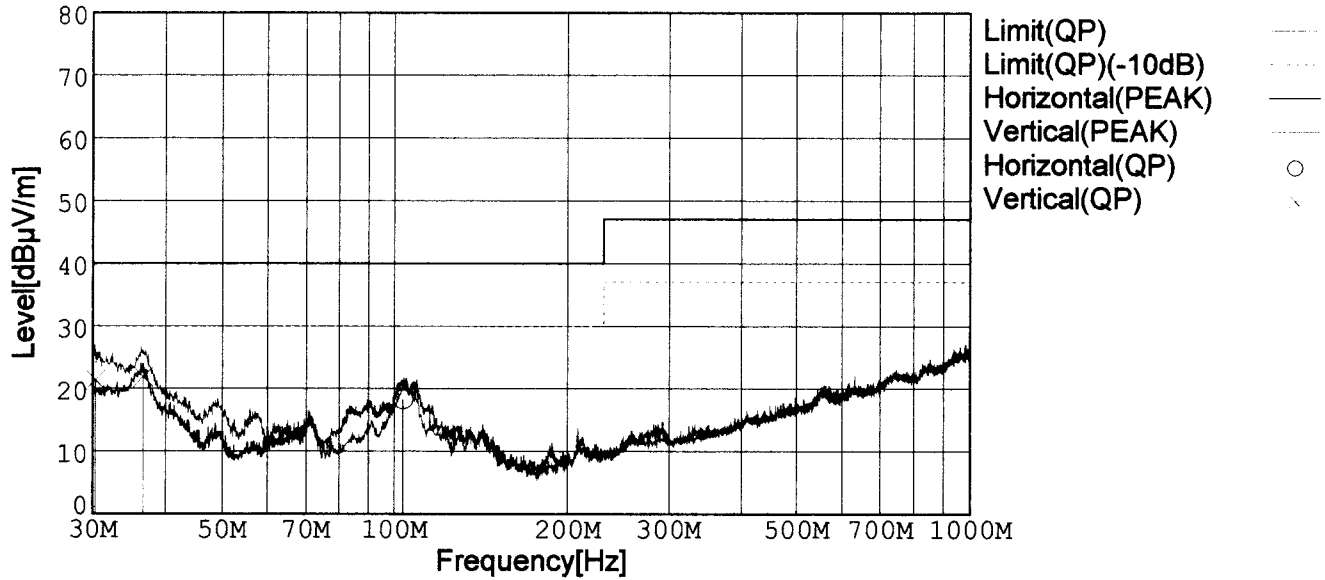

Frequency [MHz]	Meter Reading (QP) [dBµV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBµV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBµV/m]	Margin [dB]
103.593	39.9	BL	10.1	-31.7	18.3	184	144	Hori.	40.0	21.7
30.321	35.7	BL	18.0	-32.3	21.4	147	124	Vert.	40.0	18.6
36.511	39.2	BL	14.9	-32.2	21.9	315	126	Vert.	40.0	18.1


BL: Biconi-Log



LINE CONDUCTION

Model Name : AC4-CEHQV-00
 Model No. : -
 Serial No. : -
 Points : 4
 Detector : PEAK/QP/Ave.
 Line Mode : VA
 Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Limit1: [EN 55022] Class B(Ave.)
 Limit2: [EN 55022] Class B(QP)

Humi. : 50%
 Date : 2002/11/13 18:08
 Test Equip. : R3132,ESPC
 Comment : Load 100%
 C:5V 18A E:12V 7.5A H:24V 3.75A
 Q:+12V 3.75A -12V 3.75A
 V:+15V 3A -12V 3A

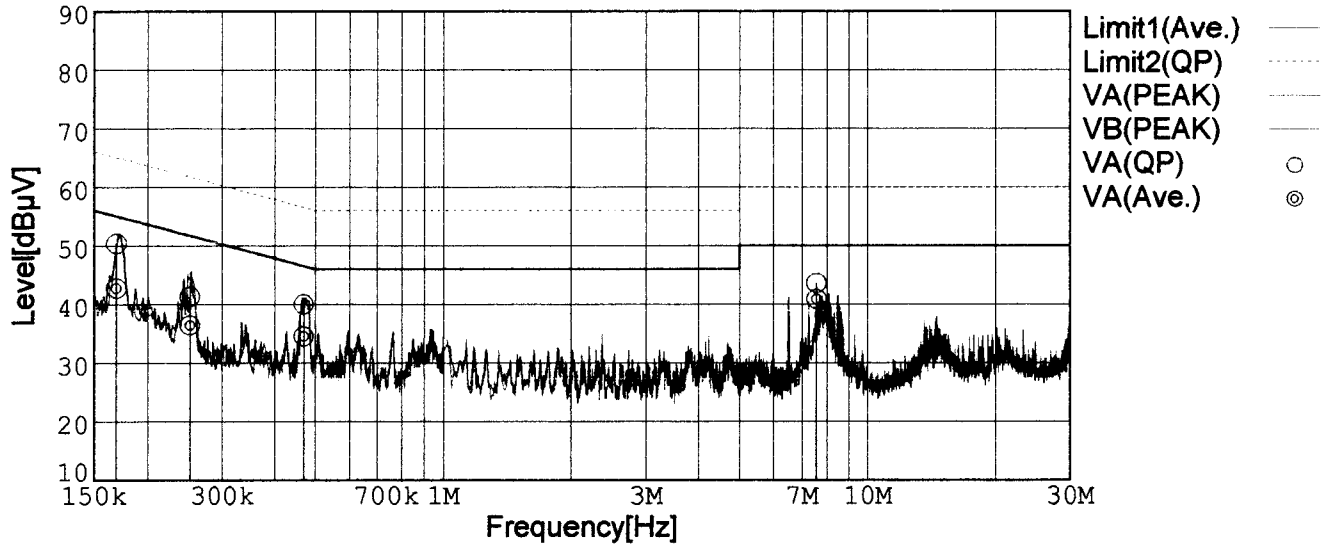

Frequency [MHz]	Meter Reading (Ave.) [dBµV]	Meter Reading (QP) [dBµV]	Factor [dB]	Level (Ave.) [dBµV]	Level (QP) [dBµV]	Line	Limit (Ave.) [dBµV]	Limit (QP) [dBµV]	Margin (Ave.) [dB]	Margin (QP)[dB]
0.1688	32.7	40.4	10.0	42.7	50.4	VA	55.0	65.0	12.3	14.6
0.2515	26.4	31.2	10.0	36.4	41.2	VA	51.7	61.7	15.3	20.5
0.4703	24.4	29.9	10.1	34.5	40.0	VA	46.5	56.5	12.0	16.5
7.5795	30.4	33.2	10.4	40.8	43.6	VA	50.0	60.0	9.2	16.4