




RADIATED EMISSION

Model Name : AC4-RPNML-00 Temp. : 25deg C
 Model No. : - Humi. : 45%
 Serial No. : - Date : 2001/10/2 11:12
 Points : 3 Test Equip. : R3132,ESPC
 Detector : PEAK/QP Condition : Load100% (V1:+3.3V10A V2:+5V10A
 Polarization : Vertical V3:+12V5A V4:+15V4A V5:+24V2.5A)
 Power Supply : 230V(1 Phase) 50Hz
 Limit: [EN 55022] Class B<3m>

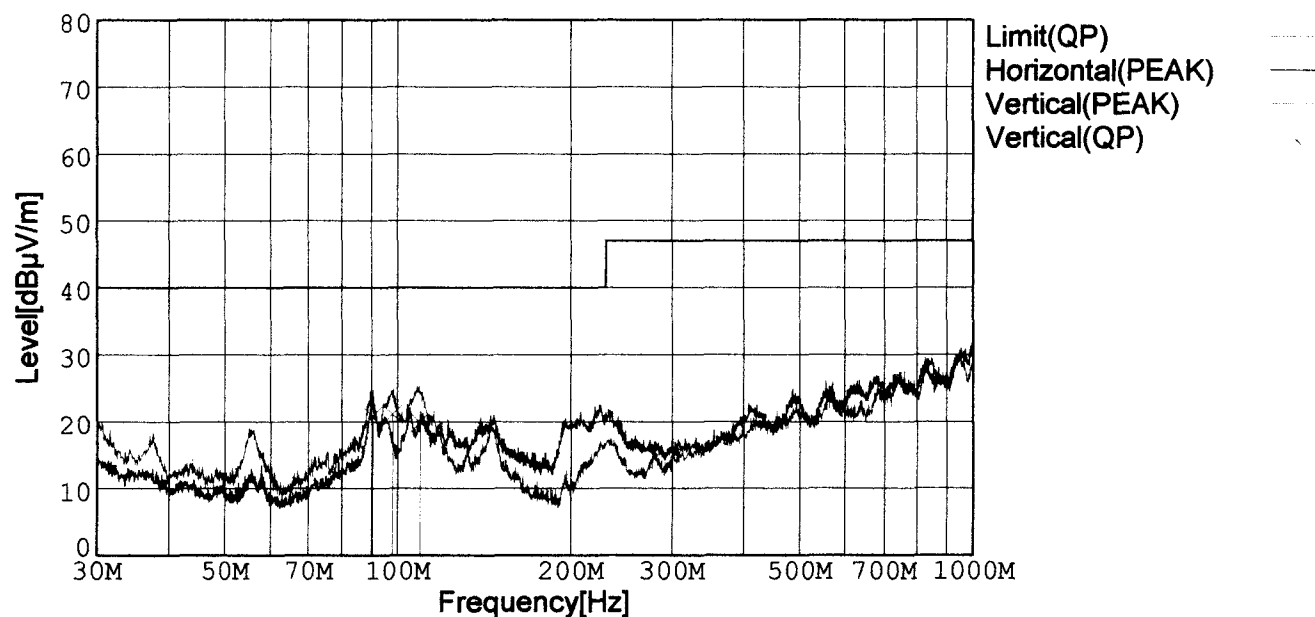


Frequency [MHz]	Meter Reading (QP) [dBµV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBµV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBµV/m]	Margin [dB]
90.480	41.6	BL	8.6	-29.4	20.8	266	106	Vert.	40.0	19.2
98.133	41.0	BL	9.6	-29.5	21.1	297	125	Vert.	40.0	18.9
109.291	39.7	BL	10.6	-30.4	19.9	47	123	Vert.	40.0	20.1

BL: Biconi-Log



LINE CONDUCTION

Model Name : AC4-RPNML-00 Temp. : 25deg C
 Model No. : - Humi. : 45%
 Serial No. : - Date : 2001/10/5 16:19
 Points : 3 Test Equip. : R3261A,ESPC
 Detector : PEAK/QP/Ave. Comment : Load100% (V1:+3.3V10A V2:+5V10A
 Line Mode : VA V3:+12V5A V4:+15V4A V5:+24V2.5A)
 Power Supply : 230V(1 Phase) 50Hz
 Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

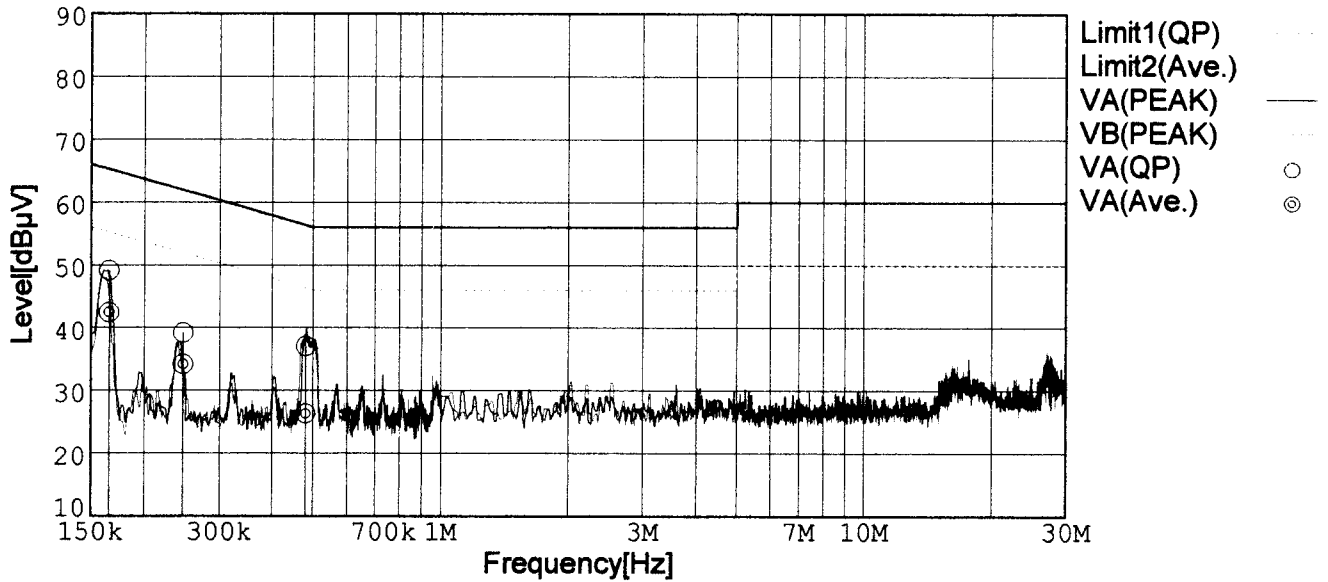

Frequency [MHz]	Meter Reading (QP) [dBµV]	Meter Reading (Ave.) [dBµV]	Factor [dB]	Level (QP) [dBµV]	Level (Ave.) [dBµV]	Line	Limit (QP) [dBµV]	Limit (Ave.) [dBµV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.1647	39.1	32.4	10.0	49.1	42.4	VA	65.2	55.2	16.1	12.8
0.2460	29.2	24.2	10.0	39.2	34.2	VA	61.9	51.9	22.7	17.7
0.4806	26.9	16.2	10.1	37.0	26.3	VA	56.3	46.3	19.3	20.0