



DATA SHEET		Date	09-Jan-19
Model	AME600F	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humidity	40 %RH
		Tested by	T.Kugo

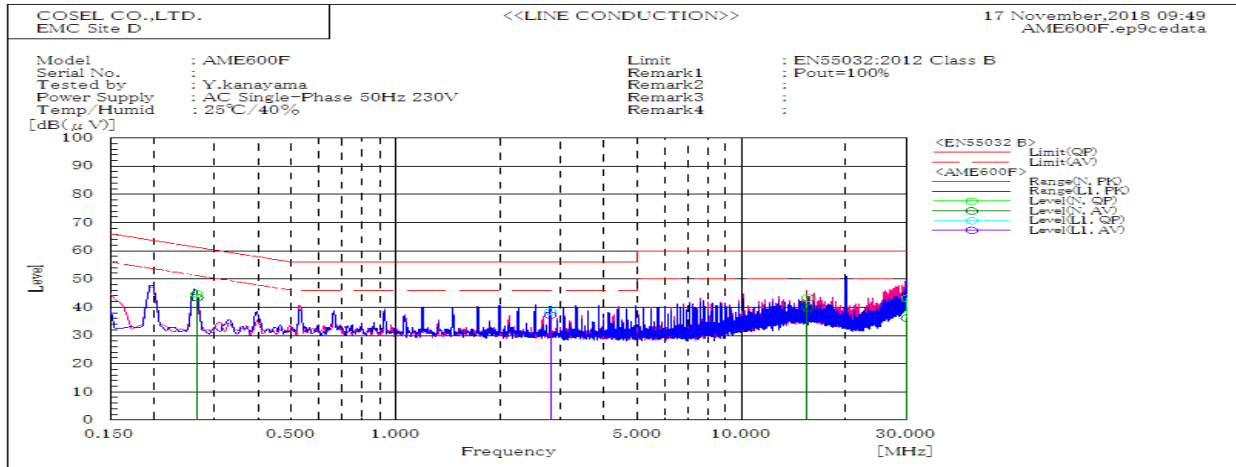


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
2.796	L1	38.4	37.3	56.0	46.0	17.6	8.7	Pass	
0.266	N	44.8	43.4	61.2	51.2	16.4	7.8	Pass	
15.451	N	43.3	39.8	60.0	50.0	16.7	10.2	Pass	
29.966	N	43.1	36.1	60.0	50.0	16.9	13.9	Pass	

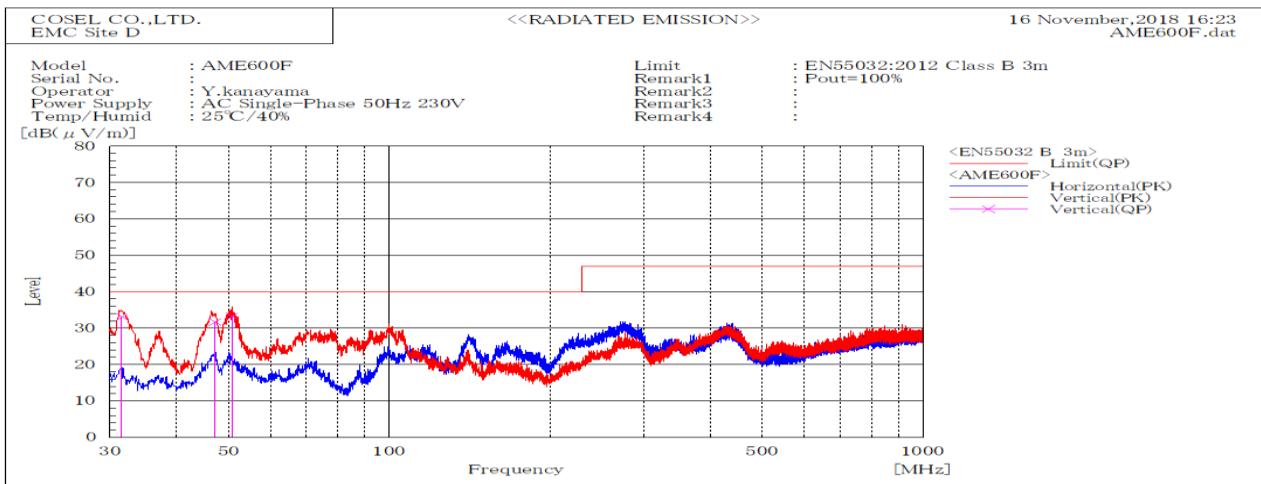


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
31.582	V	Stable	33.0	40.0	7.0	Pass	100.0	291.3	
47.157	V	Stable	31.7	40.0	8.3	Pass	100.0	0.0	
50.778	V	Stable	33.2	40.0	6.8	Pass	101.4	288.7	

DATA SHEET		Date	09-Jan-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humidity	40 %RH
		Tested by	T.Kugo

1. Line conduction

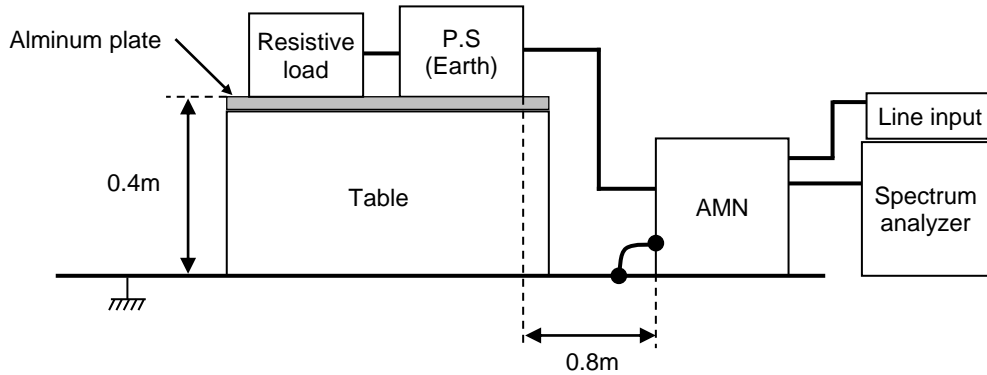


2. Radiated emission

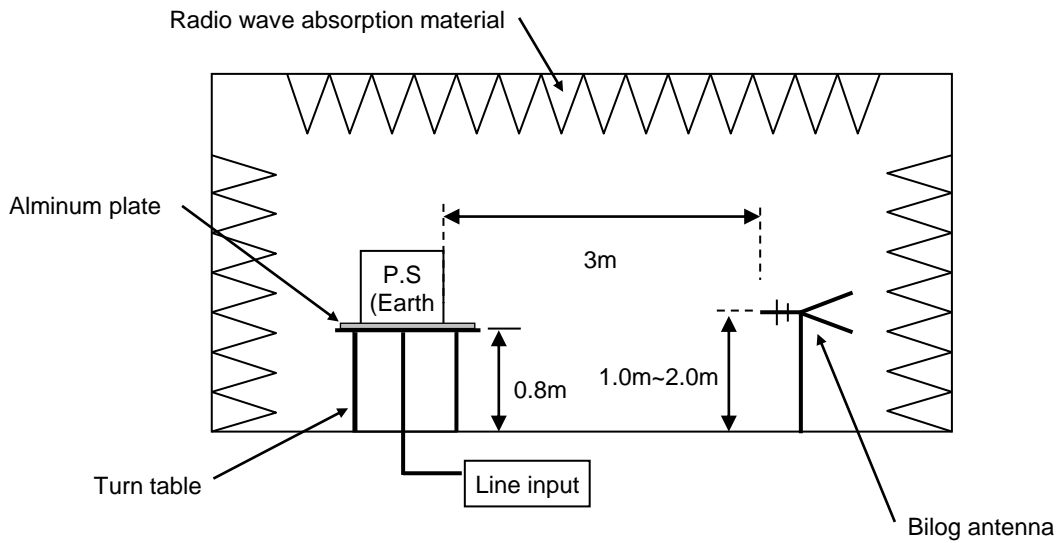

Conditions

Test : EMI
Model Name: AME600F

○Photographs of Test Set-up 1.Line conduction

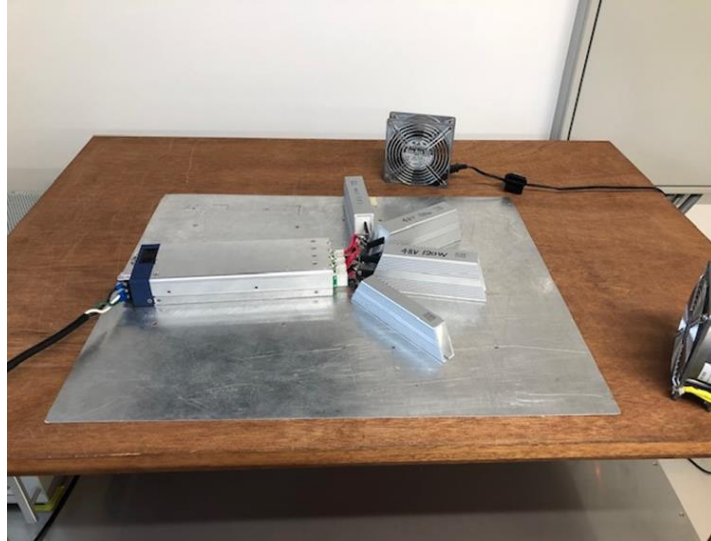

2.Radiated emission

