



DATA SHEET		Date	09-Aug-19
Model	AME800F	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humidity	40 %RH
		Tested by	Enkyo Kaku

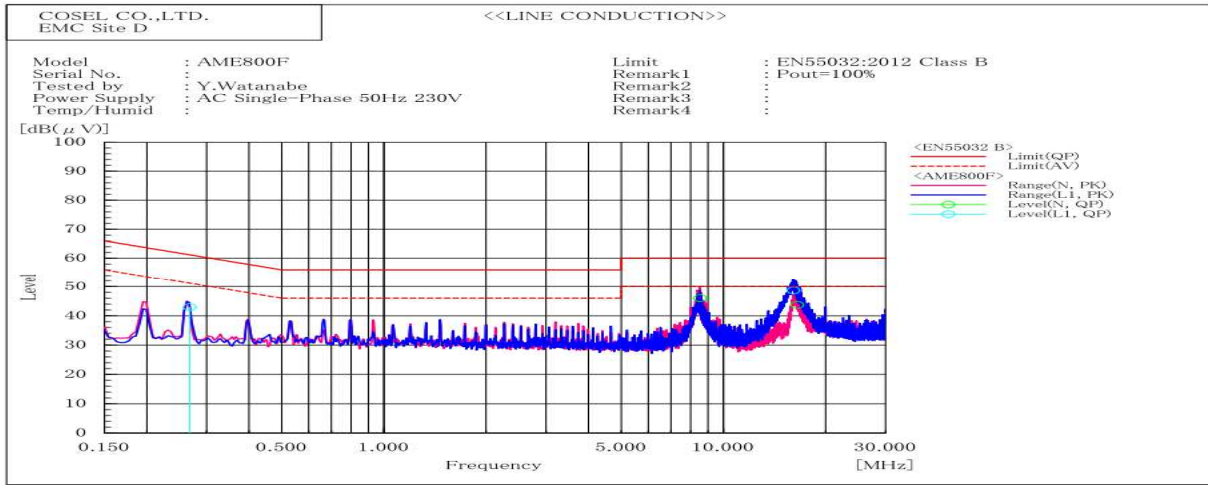


Frequency MHz	Polarization	Level dB(uV/m)		Limit dB(uV/m)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.267	L1	43	40.4	61.2	51.2	18.2	10.8	Pass	
16.062	L1	48.7	40.2	60	50	11.3	9.8	Pass	
8.531	N	46.1	39.8	60	50	13.9	10.2	Pass	
16.462	N	43.8	34.9	60	50	16.2	15.1	Pass	

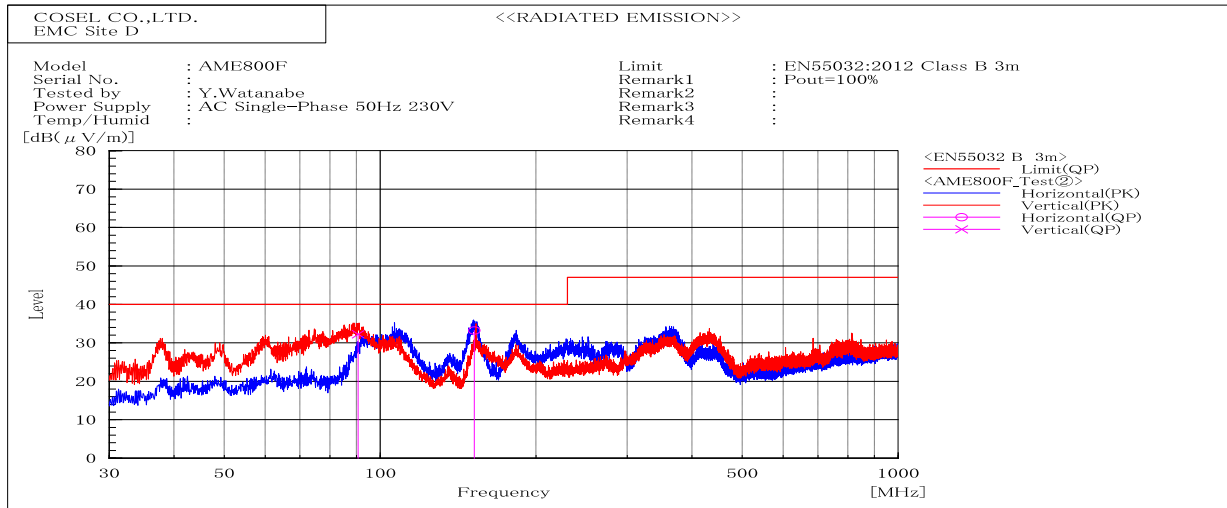


Frequency MHz	Polarization	Stability	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
90.671	V	Stable	32.3	40	7.7	Pass	100.2	296.9	
152.047	H	Stable	33.2	40	6.8	Pass	200	326.2	

DATA SHEET		Date	09-Aug-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humidity	40 %RH
		Tested by	Enkyo Kaku

1. Line conduction

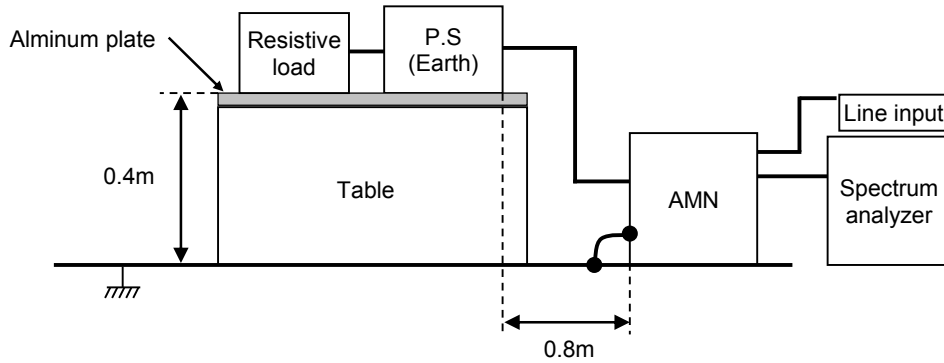

2. Radiated emission

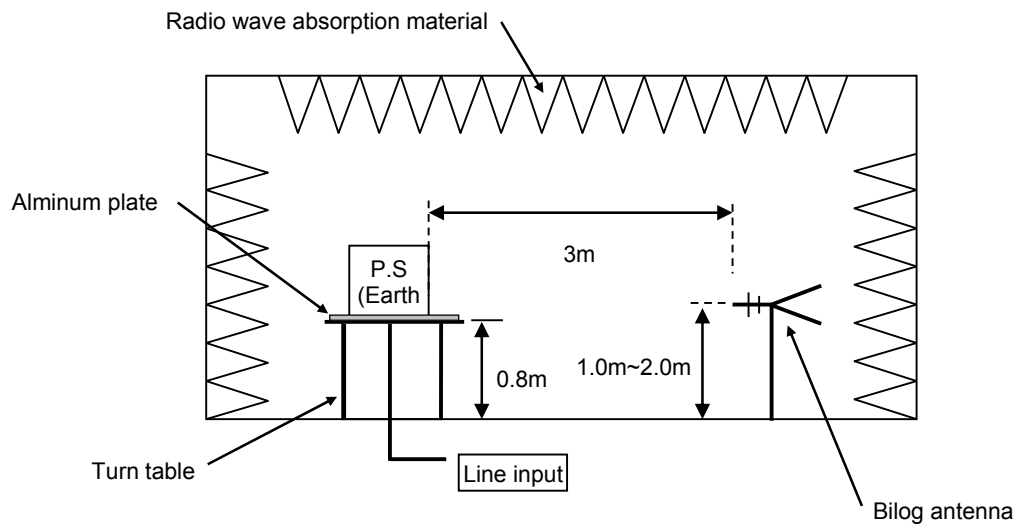

Conditions

Test : EMI
 Model Name : AME800F

○Photographs of Test Set-up

1.Line conduction



2.Radiated emission

