



<b>DATA SHEET</b>		Date	11-May-18
Model	GHA500F-15-SNF	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

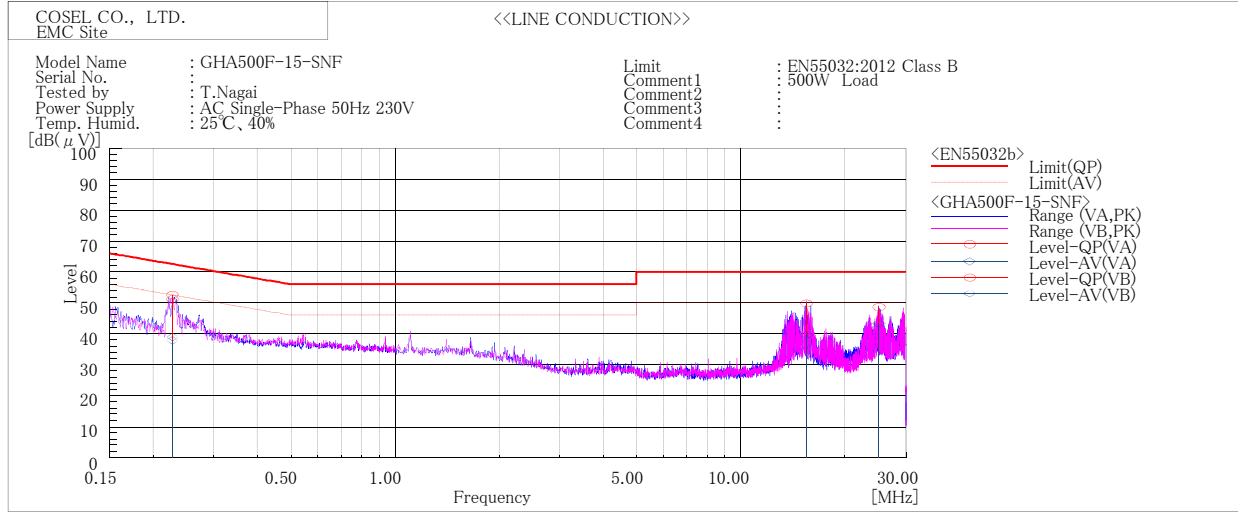


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.22701	VB	51.3	37.9	62.6	52.6	11.3	14.7	Pass	
0.22779	VA	52.5	39	62.5	52.5	10	13.5	Pass	
15.5567	VB	49.8	39.6	60	50	10.2	10.4	Pass	
25.1714	VA	48.7	43.4	60	50	11.3	6.6	Pass	

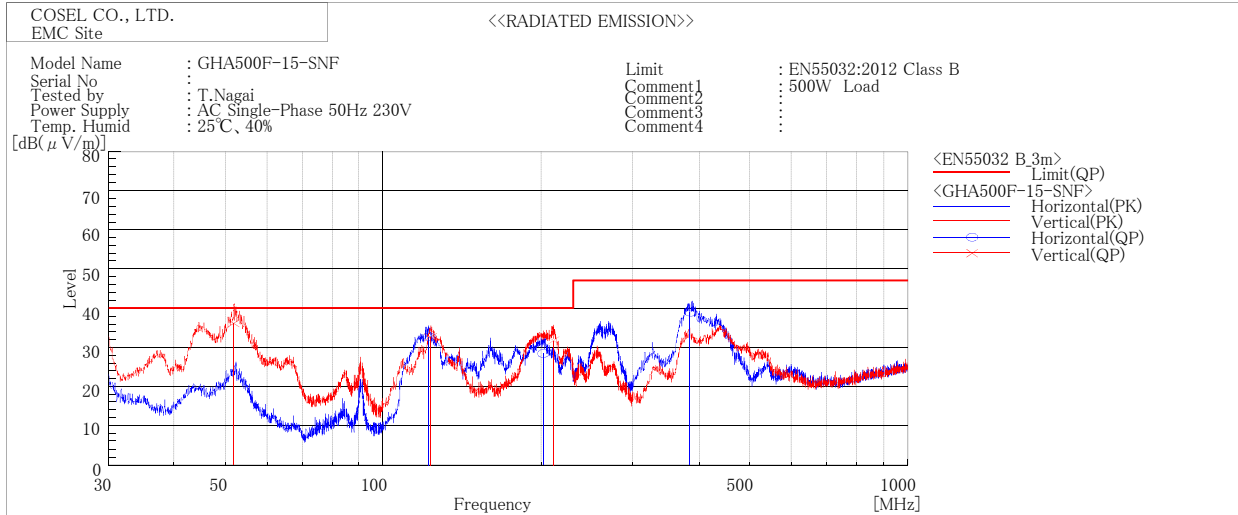

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
51.857	V	Stable	36.2	40.0	3.8	Pass	103	350	
122.398	H	Stable	32.7	40.0	7.3	Pass	133	33	
123.102	V	Stable	32.6	40.0	7.4	Pass	159	111	
202.324	H	Stable	28.4	40.0	11.6	Pass	159	272	
211.278	V	Stable	31.7	40.0	8.3	Pass	100	129	
385.803	H	Stable	38.9	47.0	8.1	Pass	101	302	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	T. Nagai

## 1. Line conduction

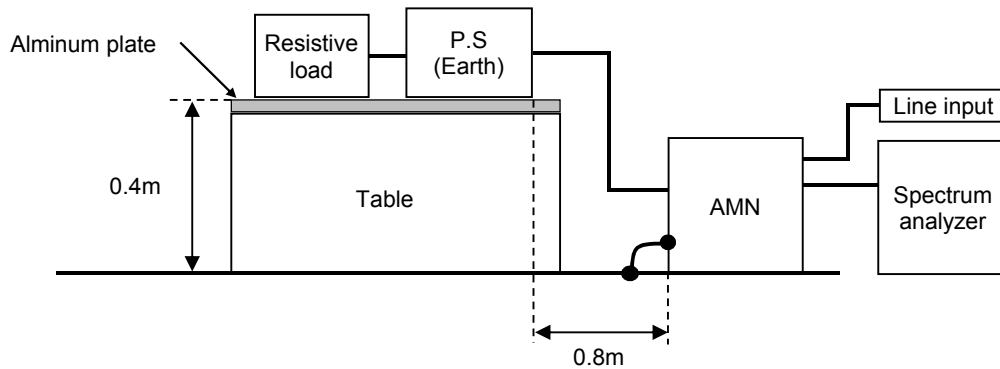

## 2. Radiated emission

