



DATA SHEET		Date	11-May-18
Model	GHA500F-56-SNF	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

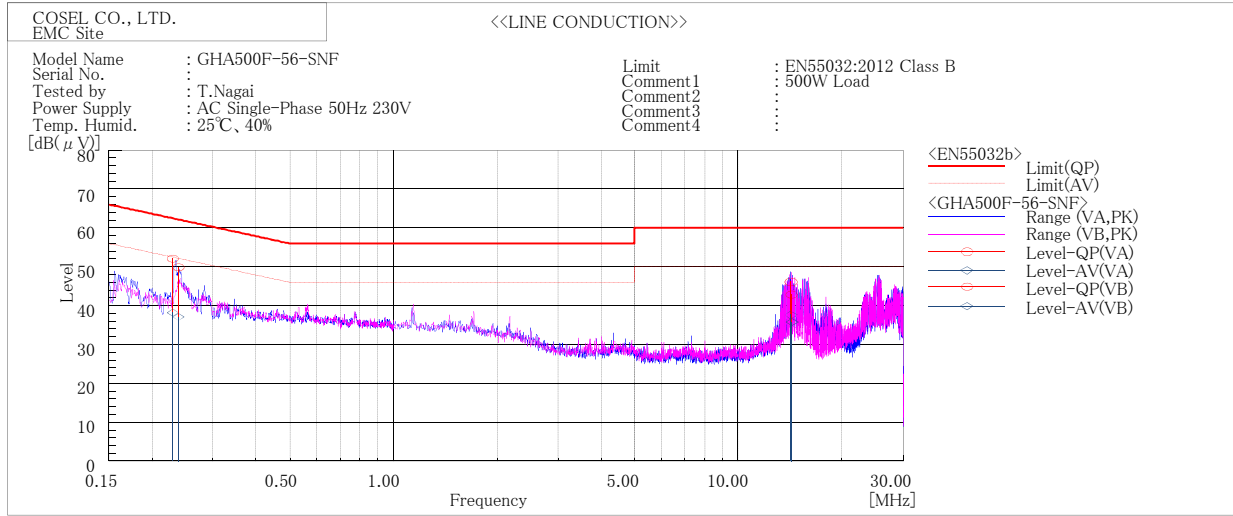


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.22947	VA	52.1	38.2	62.5	52.5	10.4	14.3	Pass	
0.23803	VB	49.8	37	62.2	52.2	12.4	15.2	Pass	
14.20475	VA	46.1	37.5	60	50	13.9	12.5	Pass	
14.31055	VB	42.8	35.8	60	50	17.2	14.2	Pass	

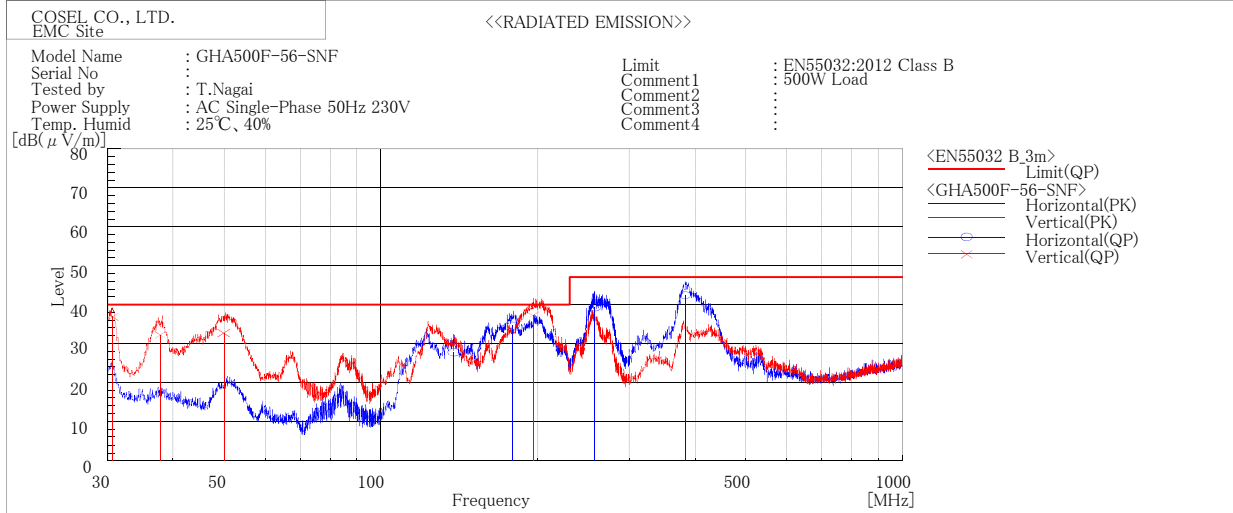

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
30.604	V	Stable	36.9	40.0	3.1	Pass	101	43	
179.439	H	Stable	34.7	40.0	5.3	Pass	158	17	
195.626	V	Stable	37.3	40.0	2.7	Pass	103	121	
257.363	H	Stable	39.3	47.0	7.7	Pass	118	4	
383.409	H	Stable	42.5	47.0	4.5	Pass	103	244	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	T. Nagai

1. Line conduction

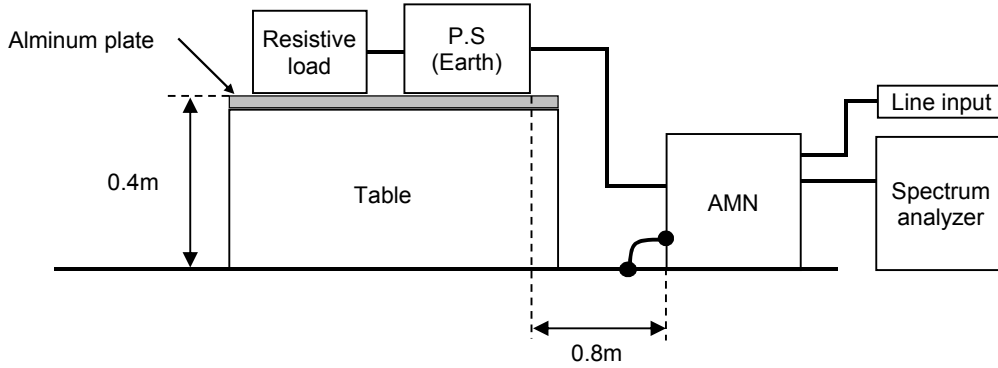

2. Radiated emission

