


KHNA90F-24 Expected Life : 推定寿命

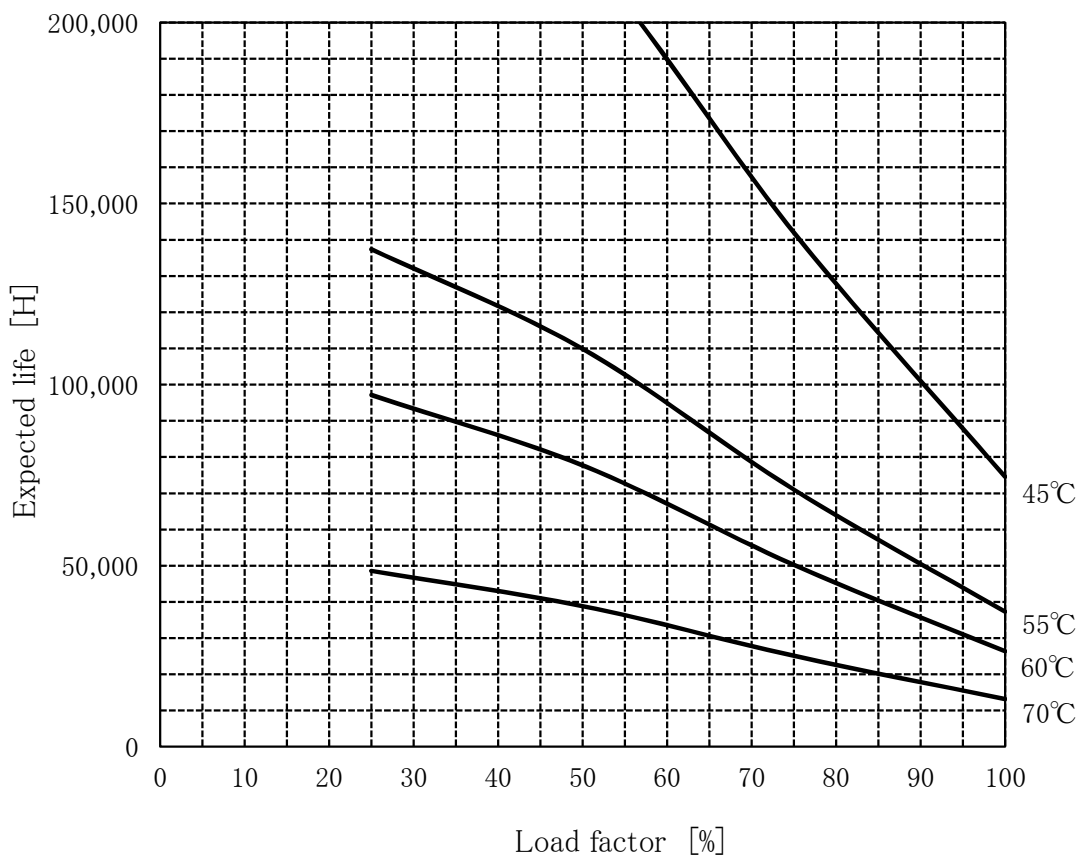

- Above expected life time is calculated according our calculation standard.
上記推定寿命は、当社算出基準に従い算出したものです。
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.
10万時間以上の領域では、封ロゴムの劣化等の影響は、計算式には含まれていません。
- Derating is required at AC85~90V input.
AC85~90V入力時は、電力デレーティングが必要です。
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature.
周囲温度の上限は、取扱説明書のデレーティング表をご参照ください。

Conditions

(1)Input voltage AC85~169V 60Hz


(2)Output voltage/
current

| DC OUTPUT | Load factor | | | |
|-----------|-------------|-------|------|-------|
| | 100% | 75% | 50% | 25% |
| 24V | 3.8A | 2.85A | 1.9A | 0.95A |
| — | — | — | — | — |
| — | — | — | — | — |


(3)Cooling method Convection

(4)Mounting method (C) Refer below

Ambient temperature measurement point
周囲温度測定ポイント



KHNA90F-24 Expected Life : 推定寿命

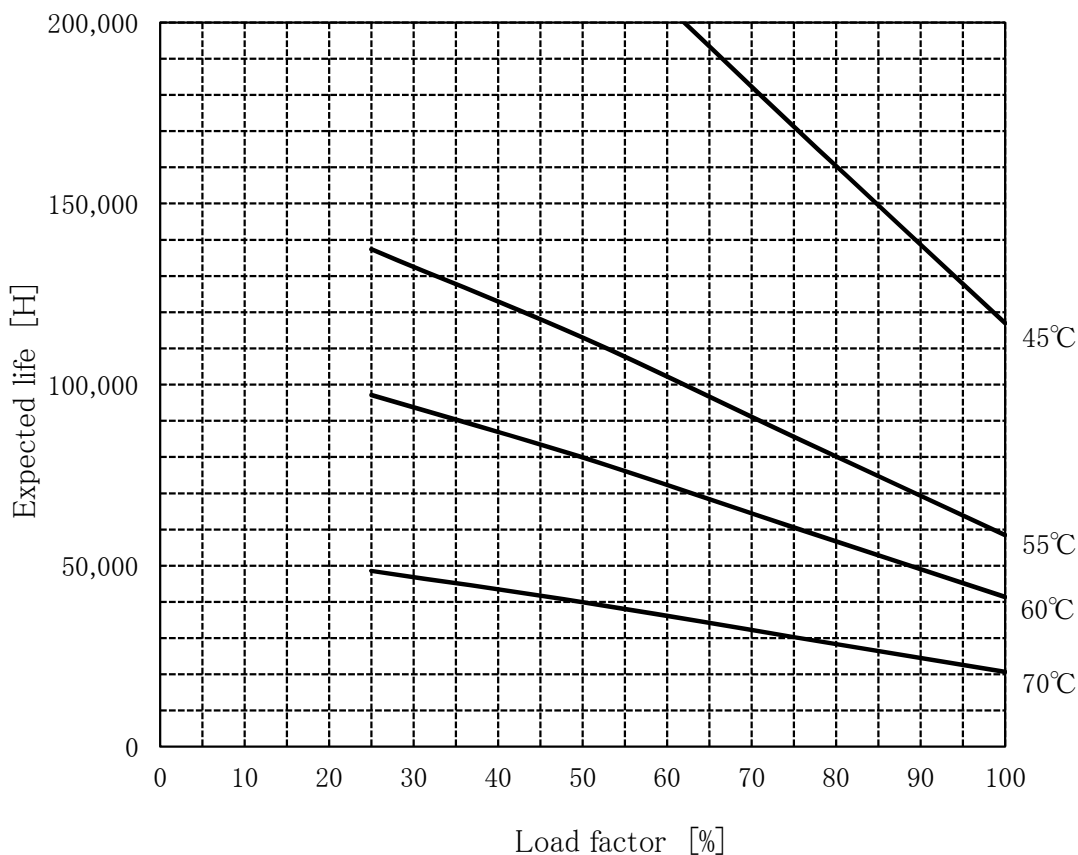

- Above expected life time is calculated according our calculation standard.
上記推定寿命は、当社算出基準に従い算出したものです。
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.
10万時間以上の領域では、封ロゴムの劣化等の影響は、計算式には含まれていません。
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature.
周囲温度の上限は、取扱説明書のデレーティング表をご参照ください。

Conditions

(1)Input voltage AC170~264V 60Hz

(2)Output voltage/
current

| DC OUTPUT | Load factor | | | |
|--------------|-------------|-------|------|-------|
| | 100% | 75% | 50% | 25% |
| 24V | 3.8A | 2.85A | 1.9A | 0.95A |
| — | — | — | — | — |
| — | — | — | — | — |

(3)Cooling method Convection

(4)Mounting method (C) Refer below

