

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Overvoltage Protection	12
過電圧保護	
13. Inrush Current	13
突入電流	
14. Dynamic Load Responce	14
動的負荷変動	
15. Rise and Fall Time	15
立上り、立下がり時間	
16. Ambient Temperature Drift	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage .	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature)	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift	19
経時ドリフト	
20. Output Voltage Accuracy	20
定電圧精度	
21. Condensation	21
結露特性	
22. Leakage Current	22
漏洩電流	
23. Line Noise Tolerance	23
入力雑音耐量	
24. Conducted Emission	24
雑音端子電圧	
25. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26)



<p>Model LCA150S-5</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
<p>Item Line Regulation 静的入力変動</p>																																		
<p>Object +5.0V30A</p>																																		
<p>1. Graph</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>□ Load 50%</p> <p>△ Load 100%</p> </div> </div> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>75</td><td>5.123</td><td>5.123</td></tr> <tr><td>80</td><td>5.123</td><td>5.123</td></tr> <tr><td>85</td><td>5.123</td><td>5.123</td></tr> <tr><td>90</td><td>5.123</td><td>5.123</td></tr> <tr><td>100</td><td>5.123</td><td>5.123</td></tr> <tr><td>110</td><td>5.123</td><td>5.123</td></tr> <tr><td>120</td><td>5.123</td><td>5.123</td></tr> <tr><td>132</td><td>5.123</td><td>5.123</td></tr> <tr><td>140</td><td>5.123</td><td>5.123</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	75	5.123	5.123	80	5.123	5.123	85	5.123	5.123	90	5.123	5.123	100	5.123	5.123	110	5.123	5.123	120	5.123	5.123	132	5.123	5.123	140	5.123	5.123
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
75	5.123	5.123																																
80	5.123	5.123																																
85	5.123	5.123																																
90	5.123	5.123																																
100	5.123	5.123																																
110	5.123	5.123																																
120	5.123	5.123																																
132	5.123	5.123																																
140	5.123	5.123																																



Model		LCA150S-5		Temperature		25°C																																																								
Item		Input Current (by Load Current) 入力電流 (負荷特性)		Testing Circuitry		Figure A																																																								
Object		_____																																																												
1. Graph				2. Values																																																										
<p> Input Volt. 85V Input Volt. 100V Input Volt. 132V </p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.09</td><td>0.09</td><td>0.10</td></tr> <tr><td>6</td><td>1.03</td><td>0.91</td><td>0.77</td></tr> <tr><td>12</td><td>1.84</td><td>1.62</td><td>1.34</td></tr> <tr><td>18</td><td>2.63</td><td>2.32</td><td>1.90</td></tr> <tr><td>24</td><td>3.41</td><td>2.98</td><td>2.46</td></tr> <tr><td>30</td><td>4.17</td><td>3.66</td><td>3.00</td></tr> <tr><td>33</td><td>4.56</td><td>4.00</td><td>3.27</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Input Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0	0.09	0.09	0.10	6	1.03	0.91	0.77	12	1.84	1.62	1.34	18	2.63	2.32	1.90	24	3.41	2.98	2.46	30	4.17	3.66	3.00	33	4.56	4.00	3.27	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																													
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																											
0	0.09	0.09	0.10																																																											
6	1.03	0.91	0.77																																																											
12	1.84	1.62	1.34																																																											
18	2.63	2.32	1.90																																																											
24	3.41	2.98	2.46																																																											
30	4.17	3.66	3.00																																																											
33	4.56	4.00	3.27																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
<p>Note: Slanted line shows the range of the rated load current</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																														




Model		LCA150S-5	Temperature	25°C																																																							
Item		Input Power (by Load Current) 入力電力 (負荷特性)	Humidity	40%RH																																																							
Object		_____	Testing Circuitry	Figure A																																																							
1. Graph		<p> Input Volt. 85V Input Volt. 100V Input Volt. 132V </p>	2. Values																																																								
			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>3</td><td>3</td><td>4</td></tr> <tr><td>6</td><td>41</td><td>41</td><td>43</td></tr> <tr><td>12</td><td>77</td><td>77</td><td>79</td></tr> <tr><td>18</td><td>115</td><td>115</td><td>116</td></tr> <tr><td>24</td><td>155</td><td>154</td><td>154</td></tr> <tr><td>30</td><td>197</td><td>195</td><td>193</td></tr> <tr><td>33</td><td>218</td><td>216</td><td>213</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Power [W]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0	3	3	4	6	41	41	43	12	77	77	79	18	115	115	116	24	155	154	154	30	197	195	193	33	218	216	213	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																										
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																								
0	3	3	4																																																								
6	41	41	43																																																								
12	77	77	79																																																								
18	115	115	116																																																								
24	155	154	154																																																								
30	197	195	193																																																								
33	218	216	213																																																								
—	—	—	—																																																								
—	—	—	—																																																								
—	—	—	—																																																								
—	—	—	—																																																								
—	—	—	—																																																								
Note: Slanted line shows the range of the rated load current																																																											
(注)斜線は定格負荷電流範囲を示す。																																																											



Model	LCA150S-5
Item	Efficiency 効率
Object	_____

Temperature 25°C
Testing Circuitry Figure A

1. Graph □ Load 50%
△ Load 100%

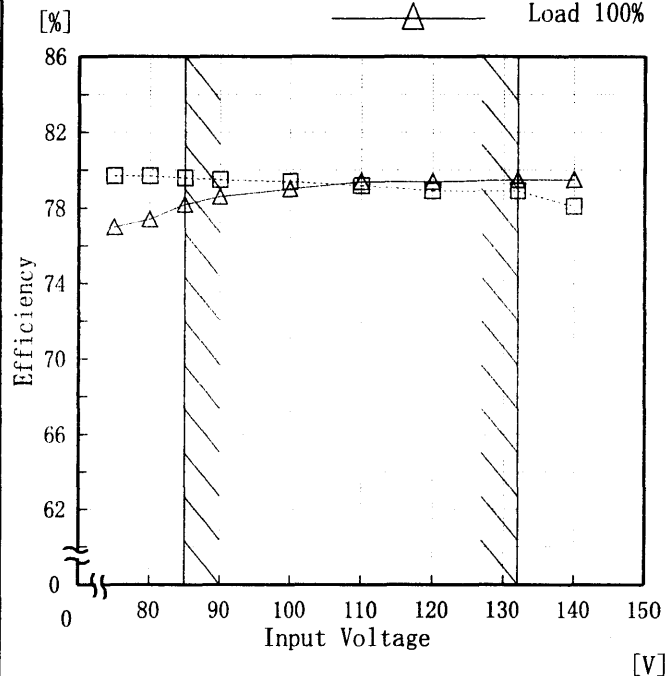

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
75	79.7	77.0
80	79.7	77.4
85	79.6	78.2
90	79.5	78.6
100	79.4	79.0
110	79.2	79.4
120	78.9	79.4
132	78.9	79.5
140	78.1	79.5



Model		LCA150S-5		Temperature		25°C																																																												
Item		Efficiency (by Load Current) 効率 (負荷特性)		Testing Circuitry		Figure A																																																												
Object		_____																																																																
1. Graph				2. Values																																																														
<p> △ Input Volt. 85V □ Input Volt. 100V ○ Input Volt. 132V </p> <p>Efficiency [%]</p> <p>Load Current [A]</p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>6</td><td>75.0</td><td>74.8</td><td>70.6</td></tr> <tr><td>12</td><td>79.4</td><td>79.0</td><td>77.4</td></tr> <tr><td>18</td><td>79.7</td><td>79.9</td><td>79.3</td></tr> <tr><td>24</td><td>79.0</td><td>79.4</td><td>79.6</td></tr> <tr><td>30</td><td>78.0</td><td>78.8</td><td>79.4</td></tr> <tr><td>33</td><td>77.4</td><td>78.3</td><td>79.1</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Efficiency [%]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	6	75.0	74.8	70.6	12	79.4	79.0	77.4	18	79.7	79.9	79.3	24	79.0	79.4	79.6	30	78.0	78.8	79.4	33	77.4	78.3	79.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																																	
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																															
6	75.0	74.8	70.6																																																															
12	79.4	79.0	77.4																																																															
18	79.7	79.9	79.3																																																															
24	79.0	79.4	79.6																																																															
30	78.0	78.8	79.4																																																															
33	77.4	78.3	79.1																																																															
—	—	—	—																																																															
—	—	—	—																																																															
—	—	—	—																																																															
—	—	—	—																																																															
—	—	—	—																																																															
—	—	—	—																																																															
—	—	—	—																																																															
<p>Note: Slanted line shows the range of the rated load current</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																																		



Model		LCA150S-5		Temperature	25°C																																
Item		Hold-Up Time 出力保持時間		Testing Circuitry	Figure A																																
Object		+5.0V30A																																			
1. Graph			□ Load 50%	2. Values																																	
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [mS]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>75</td><td>23</td><td>9</td></tr> <tr><td>80</td><td>31</td><td>13</td></tr> <tr><td>85</td><td>40</td><td>17</td></tr> <tr><td>90</td><td>49</td><td>22</td></tr> <tr><td>100</td><td>69</td><td>31</td></tr> <tr><td>110</td><td>91</td><td>42</td></tr> <tr><td>120</td><td>116</td><td>55</td></tr> <tr><td>132</td><td>147</td><td>71</td></tr> <tr><td>140</td><td>171</td><td>83</td></tr> </tbody> </table>			Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	75	23	9	80	31	13	85	40	17	90	49	22	100	69	31	110	91	42	120	116	55	132	147	71	140	171	83
Input Voltage [V]	Hold-Up Time [mS]																																				
	Load 50%	Load 100%																																			
75	23	9																																			
80	31	13																																			
85	40	17																																			
90	49	22																																			
100	69	31																																			
110	91	42																																			
120	116	55																																			
132	147	71																																			
140	171	83																																			
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、AC入力断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																					



Model		LCA150S-5		Temperature		25°C																																																				
Item		Instantaneous Interruption Compensation 瞬時停電保障		Testing Circuitry		Figure A																																																				
Object		+5.0V30A																																																								
1. Graph				2. Values																																																						
<p> △ Input Volt. 85 V □ Input Volt. 100 V ○ Input Volt. 132 V </p> <p>Instantaneous Compensation Time [mS]</p> <p>Load Current [A]</p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [mS]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>6</td><td>81</td><td>154</td><td>314</td></tr> <tr><td>12</td><td>39</td><td>78</td><td>177</td></tr> <tr><td>18</td><td>22</td><td>47</td><td>119</td></tr> <tr><td>24</td><td>13</td><td>35</td><td>85</td></tr> <tr><td>30</td><td>12</td><td>22</td><td>64</td></tr> <tr><td>33</td><td>5</td><td>22</td><td>60</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Time [mS]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0	—	—	—	6	81	154	314	12	39	78	177	18	22	47	119	24	13	35	85	30	12	22	64	33	5	22	60	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Time [mS]																																																									
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																							
0	—	—	—																																																							
6	81	154	314																																																							
12	39	78	177																																																							
18	22	47	119																																																							
24	13	35	85																																																							
30	12	22	64																																																							
33	5	22	60																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated load current.</p>																																																										
<p>瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																										




Model		LCA150S-5		Temperature	25°C																																															
Item		Load Regulation 静的負荷変動		Testing Circuitry	Figure A																																															
Object		+5.0V30A																																																		
1. Graph			2. Values																																																	
<p> △ Input Volt. 85V □ Input Volt. 100V ○ Input Volt. 132V </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.123</td><td>5.123</td><td>5.123</td></tr> <tr><td>6.0</td><td>5.123</td><td>5.123</td><td>5.123</td></tr> <tr><td>12.0</td><td>5.123</td><td>5.123</td><td>5.123</td></tr> <tr><td>18.0</td><td>5.123</td><td>5.123</td><td>5.123</td></tr> <tr><td>24.0</td><td>5.123</td><td>5.123</td><td>5.123</td></tr> <tr><td>30.0</td><td>5.124</td><td>5.124</td><td>5.124</td></tr> <tr><td>33.0</td><td>5.124</td><td>5.124</td><td>5.124</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.0	5.123	5.123	5.123	6.0	5.123	5.123	5.123	12.0	5.123	5.123	5.123	18.0	5.123	5.123	5.123	24.0	5.123	5.123	5.123	30.0	5.124	5.124	5.124	33.0	5.124	5.124	5.124	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Output Voltage [V]																																																			
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																	
0.0	5.123	5.123	5.123																																																	
6.0	5.123	5.123	5.123																																																	
12.0	5.123	5.123	5.123																																																	
18.0	5.123	5.123	5.123																																																	
24.0	5.123	5.123	5.123																																																	
30.0	5.124	5.124	5.124																																																	
33.0	5.124	5.124	5.124																																																	
--	--	--	--																																																	
--	--	--	--																																																	
--	--	--	--																																																	
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																				

COSEL

Model	LCA150S-5	Temperature	25°C
Item	Ripple Voltage (by Load Current) リップル電圧(負荷電流特性)	Testing Circuitry	Figure A
Object	+5.0V30A		

1. Graph
 [mV]
 □ Input Volt. 85V
 △ Input Volt. 132V

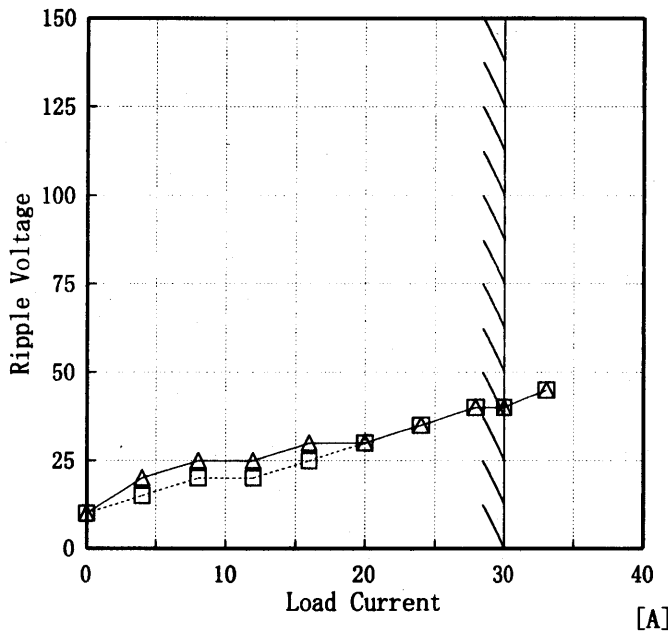

2. Values

Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	10	10
4.00	15	20
8.00	20	25
12.00	20	25
16.00	25	30
20.00	30	30
24.00	35	35
28.00	40	40
30.00	40	40
33.00	45	45
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。
 (注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
 入力商用周期
 T2: Due to Switching
 スイッチング周期


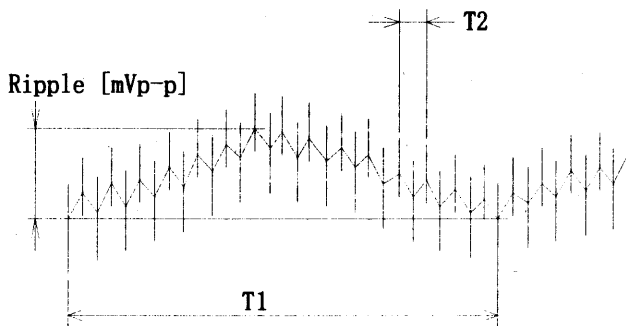


Fig. Complex Ripple Wave Form
 図 リップル波形詳細図

COSEL

Model	LCA150S-5	Temperature	25°C
Item	Ripple-Noise リップルノイズ	Testing Circuitry	Figure A
Object	+5.0V30A		

1. Graph
 [mV]
 -----□----- Input Volt. 85V
 -----△----- Input Volt. 132V

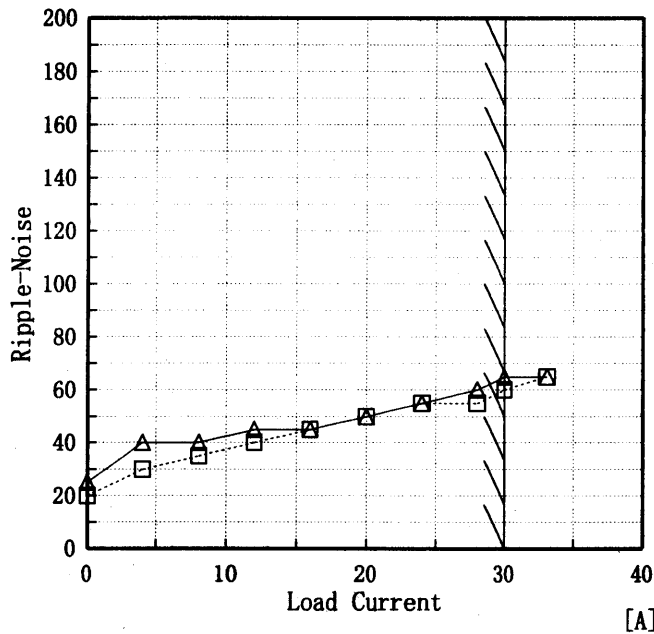

2. Values

Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.00	20	25
4.00	30	40
8.00	35	40
12.00	40	45
16.00	45	45
20.00	50	50
24.00	55	55
28.00	55	60
30.00	60	65
33.00	65	65
—	—	—

Ripple-Noise is shown as p-p in the figure below.
 Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p-p 値で示される。
 (注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
 入力商用周期
 T2: Due to Switching
 スイッチング周期

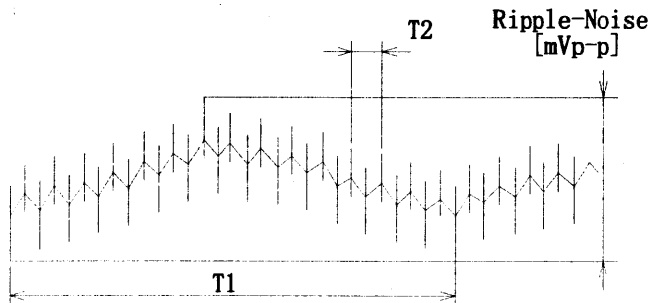


Fig. Complex Ripple Wave Form
 図 リップル波形詳細図

COSEL


<p>Model LCA150S-5</p> <p>Item Overcurrent Protection 過電流保護</p> <p>Object +5.0V30A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																							
<p>1. Graph</p> <p>[V]</p> <p>----- Input Volt. 85 V</p> <p>————— Input Volt. 100 V</p> <p>————— Input Volt. 132 V</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>5.00</td><td>36.68</td><td>36.45</td><td>36.68</td></tr> <tr><td>4.75</td><td>36.74</td><td>36.53</td><td>36.84</td></tr> <tr><td>4.50</td><td>36.83</td><td>36.67</td><td>37.07</td></tr> <tr><td>4.00</td><td>37.07</td><td>37.02</td><td>37.40</td></tr> <tr><td>3.50</td><td>37.40</td><td>37.30</td><td>37.71</td></tr> <tr><td>3.00</td><td>37.64</td><td>37.56</td><td>37.99</td></tr> <tr><td>2.50</td><td>37.87</td><td>37.81</td><td>38.30</td></tr> <tr><td>2.00</td><td>38.12</td><td>38.13</td><td>38.64</td></tr> <tr><td>1.50</td><td>38.38</td><td>38.32</td><td>39.01</td></tr> <tr><td>1.00</td><td>38.61</td><td>38.78</td><td>39.22</td></tr> <tr><td>0.50</td><td>38.66</td><td>38.62</td><td>38.89</td></tr> <tr><td>0.00</td><td>38.25</td><td>38.08</td><td>37.93</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	5.00	36.68	36.45	36.68	4.75	36.74	36.53	36.84	4.50	36.83	36.67	37.07	4.00	37.07	37.02	37.40	3.50	37.40	37.30	37.71	3.00	37.64	37.56	37.99	2.50	37.87	37.81	38.30	2.00	38.12	38.13	38.64	1.50	38.38	38.32	39.01	1.00	38.61	38.78	39.22	0.50	38.66	38.62	38.89	0.00	38.25	38.08	37.93
Output Voltage [V]	Load Current [A]																																																								
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																						
5.00	36.68	36.45	36.68																																																						
4.75	36.74	36.53	36.84																																																						
4.50	36.83	36.67	37.07																																																						
4.00	37.07	37.02	37.40																																																						
3.50	37.40	37.30	37.71																																																						
3.00	37.64	37.56	37.99																																																						
2.50	37.87	37.81	38.30																																																						
2.00	38.12	38.13	38.64																																																						
1.50	38.38	38.32	39.01																																																						
1.00	38.61	38.78	39.22																																																						
0.50	38.66	38.62	38.89																																																						
0.00	38.25	38.08	37.93																																																						



Model		LCA150S-5		Testing Circuitry Figure A																																																			
Item		Overvoltage Protection 過電圧保護																																																					
Object		±5.0V30A																																																					
1. Graph			△ Input Volt. 85 V □ Input Volt. 100 V ○ Input Volt. 132 V	2. Values																																																			
			<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. [°C]</th> <th colspan="3">Operating Point [V]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>6.32</td><td>6.32</td><td>6.32</td></tr> <tr><td>-10</td><td>6.32</td><td>6.32</td><td>6.32</td></tr> <tr><td>0</td><td>6.32</td><td>6.32</td><td>6.32</td></tr> <tr><td>10</td><td>6.25</td><td>6.25</td><td>6.25</td></tr> <tr><td>20</td><td>6.25</td><td>6.25</td><td>6.25</td></tr> <tr><td>25</td><td>6.25</td><td>6.25</td><td>6.25</td></tr> <tr><td>30</td><td>6.25</td><td>6.25</td><td>6.25</td></tr> <tr><td>40</td><td>6.25</td><td>6.25</td><td>6.25</td></tr> <tr><td>50</td><td>6.25</td><td>6.25</td><td>6.25</td></tr> <tr><td>60</td><td>6.25</td><td>6.25</td><td>6.25</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Ambient Temp. [°C]	Operating Point [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	-20	6.32	6.32	6.32	-10	6.32	6.32	6.32	0	6.32	6.32	6.32	10	6.25	6.25	6.25	20	6.25	6.25	6.25	25	6.25	6.25	6.25	30	6.25	6.25	6.25	40	6.25	6.25	6.25	50	6.25	6.25	6.25	60	6.25	6.25	6.25	—	—	—	—
Ambient Temp. [°C]	Operating Point [V]																																																						
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																				
-20	6.32	6.32	6.32																																																				
-10	6.32	6.32	6.32																																																				
0	6.32	6.32	6.32																																																				
10	6.25	6.25	6.25																																																				
20	6.25	6.25	6.25																																																				
25	6.25	6.25	6.25																																																				
30	6.25	6.25	6.25																																																				
40	6.25	6.25	6.25																																																				
50	6.25	6.25	6.25																																																				
60	6.25	6.25	6.25																																																				
—	—	—	—																																																				
Load 0% Note: Slanted line shows the range of the rated ambient temperature. (注)斜線は定格周囲温度範囲を示す。																																																							


COSEL

Model	LCA150S-5	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object	_____	

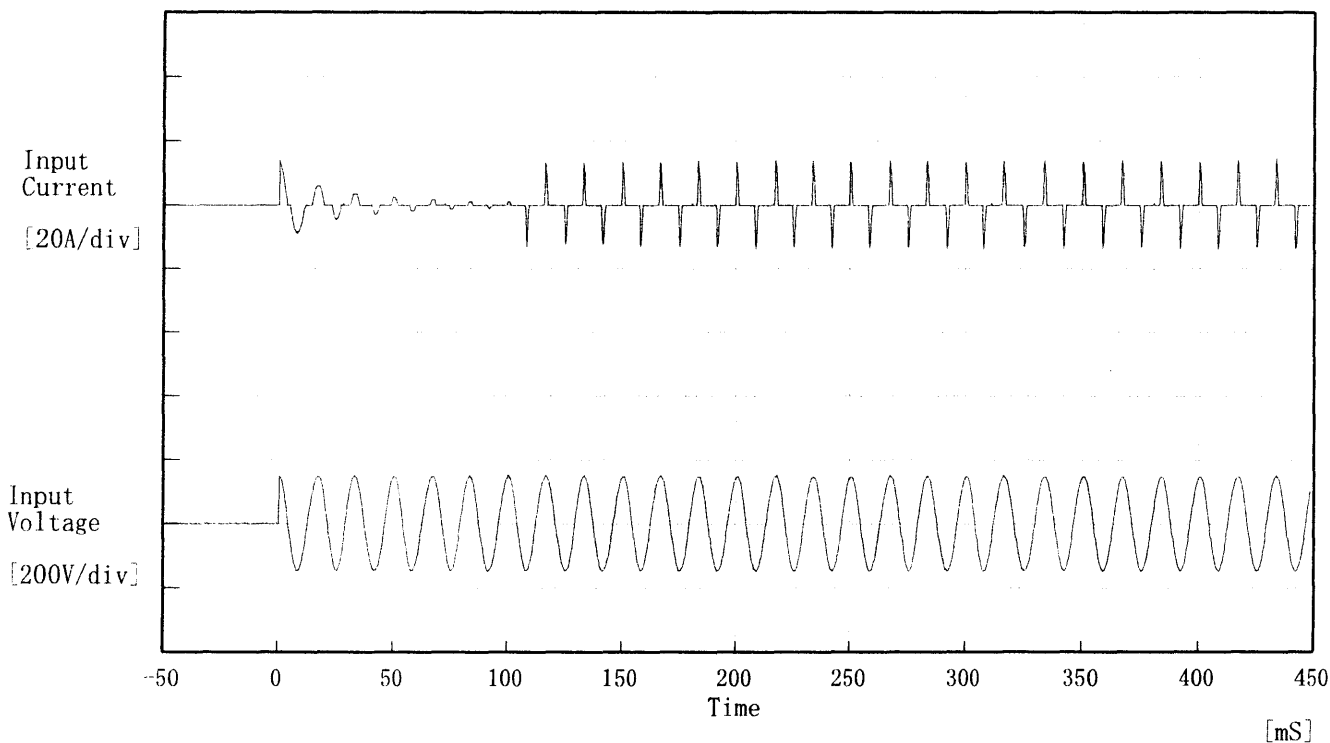

Input Voltage 100 V
 Frequency 60 Hz
 Load 100 %
 Inrush Current


- ① 13.80 [A]
- ② 14.40 [A]

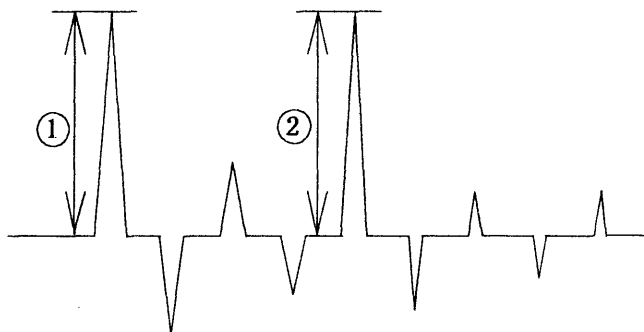





Model		LCA150S-5	Temperature 25°C Testing Circuitry Figure A
Item		Dynamic Load Responce 動的負荷変動	
Object		+5.0V30A	



Input Volt. 100 V
Cycle 1000 mS



Load 0% ←→
Load 100 %

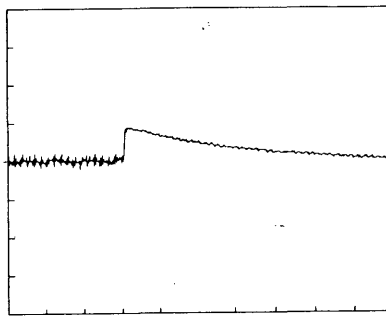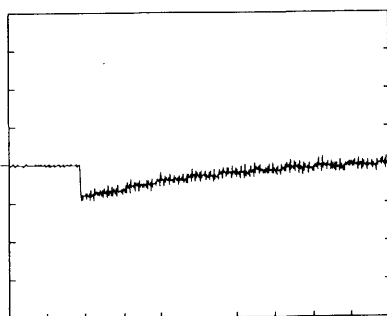

Load 0% ←→
Load 50 %

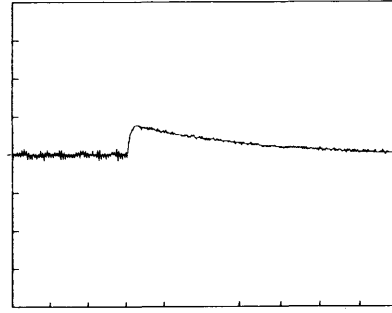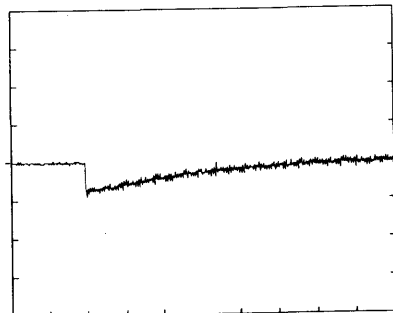

100 mV/div


10 mS/div



Model	LCA150S-5	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+5.0V30A		

1. Graph


Input Volt. 85 V

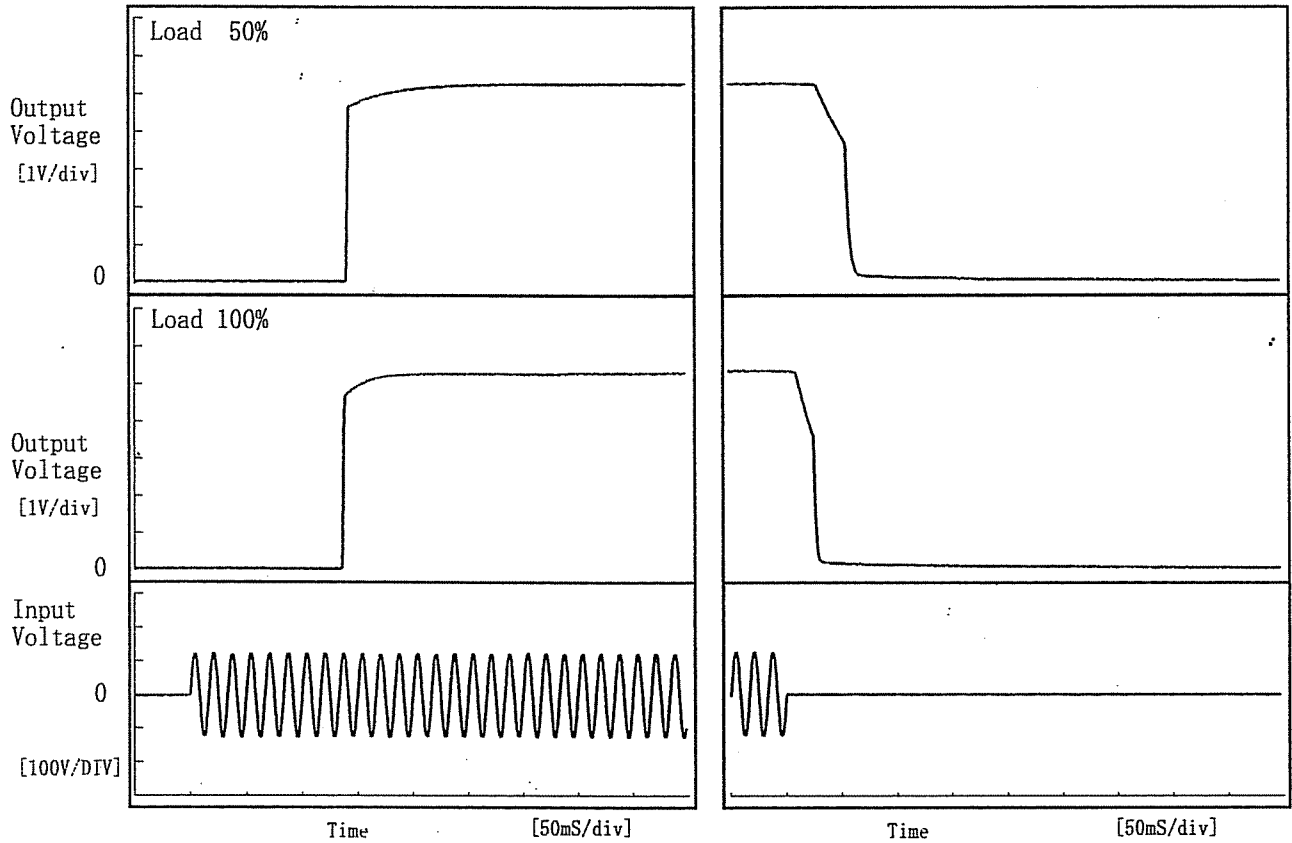

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	139.8	1.8	141.5	39.5	23.0
100 %	140.5	3.0	143.5	16.8	14.0

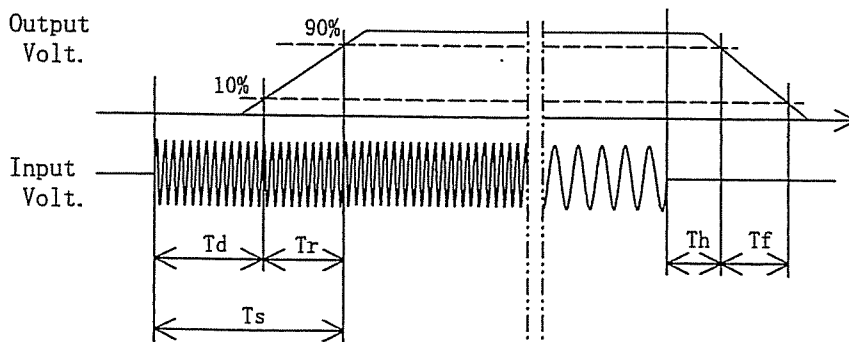

COSEL

Model		LCA150S-5		Testing Circuitry Figure A																																																			
Item		Ambient Temperature Drift 周囲温度変動																																																					
Object		+5.0V30A																																																					
1. Graph			△ Input Volt. 85V □ Input Volt. 100V ○ Input Volt. 132V	2. Values																																																			
<p style="text-align: center;">Load 100%</p>			<table border="1"> <thead> <tr> <th rowspan="2">Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>5.129</td><td>5.129</td><td>5.129</td></tr> <tr><td>-10</td><td>5.129</td><td>5.129</td><td>5.129</td></tr> <tr><td>0</td><td>5.128</td><td>5.128</td><td>5.128</td></tr> <tr><td>10</td><td>5.127</td><td>5.127</td><td>5.127</td></tr> <tr><td>20</td><td>5.125</td><td>5.125</td><td>5.125</td></tr> <tr><td>25</td><td>5.123</td><td>5.124</td><td>5.124</td></tr> <tr><td>30</td><td>5.122</td><td>5.122</td><td>5.122</td></tr> <tr><td>40</td><td>5.119</td><td>5.119</td><td>5.119</td></tr> <tr><td>50</td><td>5.116</td><td>5.116</td><td>5.116</td></tr> <tr><td>60</td><td>5.113</td><td>5.113</td><td>5.113</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Temperature [°C]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	-20	5.129	5.129	5.129	-10	5.129	5.129	5.129	0	5.128	5.128	5.128	10	5.127	5.127	5.127	20	5.125	5.125	5.125	25	5.123	5.124	5.124	30	5.122	5.122	5.122	40	5.119	5.119	5.119	50	5.116	5.116	5.116	60	5.113	5.113	5.113	—	—	—	—
Temperature [°C]	Output Voltage [V]																																																						
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																				
-20	5.129	5.129	5.129																																																				
-10	5.129	5.129	5.129																																																				
0	5.128	5.128	5.128																																																				
10	5.127	5.127	5.127																																																				
20	5.125	5.125	5.125																																																				
25	5.123	5.124	5.124																																																				
30	5.122	5.122	5.122																																																				
40	5.119	5.119	5.119																																																				
50	5.116	5.116	5.116																																																				
60	5.113	5.113	5.113																																																				
—	—	—	—																																																				
Note: Slanted line shows the range of the rated ambient temperature.																																																							
(注)斜線は定格周囲温度範囲を示す。																																																							




<p>Model LCA150S-5</p> <p>Item Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧</p> <p>Object +5.0V30A</p>		<p>Testing Circuitry Figure A</p>																																						
<p>1. Graph</p> <p>□ Load 50%</p> <p>△ Load 100%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>			<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-20</td><td>65</td><td>70</td></tr> <tr><td>-10</td><td>64</td><td>69</td></tr> <tr><td>0</td><td>64</td><td>69</td></tr> <tr><td>10</td><td>64</td><td>69</td></tr> <tr><td>20</td><td>64</td><td>69</td></tr> <tr><td>25</td><td>64</td><td>69</td></tr> <tr><td>30</td><td>64</td><td>69</td></tr> <tr><td>40</td><td>64</td><td>69</td></tr> <tr><td>50</td><td>64</td><td>69</td></tr> <tr><td>60</td><td>63</td><td>69</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Input Voltage [V]		Load 50%	Load 100%	-20	65	70	-10	64	69	0	64	69	10	64	69	20	64	69	25	64	69	30	64	69	40	64	69	50	64	69	60	63	69	—	—
Ambient Temp. [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-20	65	70																																						
-10	64	69																																						
0	64	69																																						
10	64	69																																						
20	64	69																																						
25	64	69																																						
30	64	69																																						
40	64	69																																						
50	64	69																																						
60	63	69																																						
—	—	—																																						



Model	LCA150S-5
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+5.0V 30A

Testing Circuitry Figure A

1. Graph □ Load 50%
—△— Load 100%

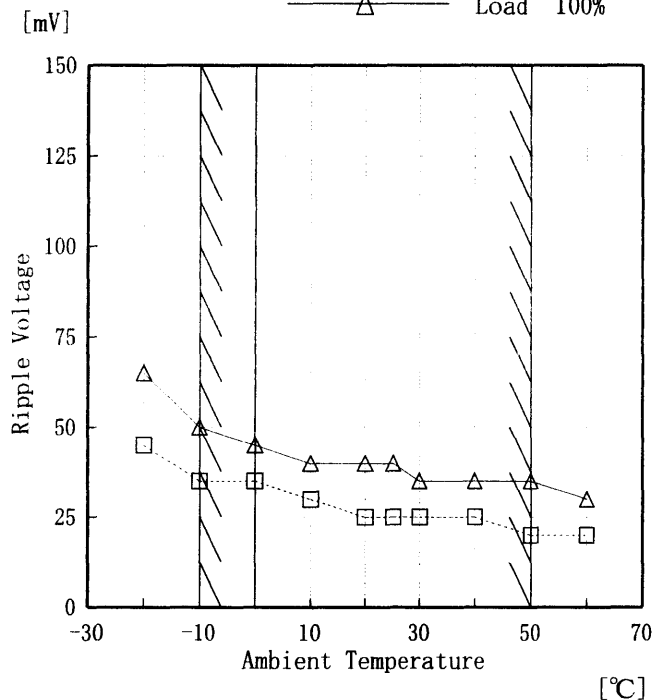

Input Volt. 100 V

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-20	45	65
-10	35	50
0	35	45
10	30	40
20	25	40
25	25	40
30	25	35
40	25	35
50	20	35
60	20	30
—	—	—

COSEL

Model		LCA150S-5	Temperature 25 °C Testing Circuitry Figure A																						
Item		Time Lapse Drift 経時ドリフト																							
Object		+5.0V30A																							
1. Graph		2. Values																							
<p>[V]</p> <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 100V Load 100%</p>		<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.127</td></tr> <tr><td>0.5</td><td>5.125</td></tr> <tr><td>1.0</td><td>5.125</td></tr> <tr><td>2.0</td><td>5.125</td></tr> <tr><td>3.0</td><td>5.125</td></tr> <tr><td>4.0</td><td>5.125</td></tr> <tr><td>5.0</td><td>5.125</td></tr> <tr><td>6.0</td><td>5.125</td></tr> <tr><td>7.0</td><td>5.125</td></tr> <tr><td>8.0</td><td>5.124</td></tr> </tbody> </table>		Time since start [H]	Output Voltage [V]	0.0	5.127	0.5	5.125	1.0	5.125	2.0	5.125	3.0	5.125	4.0	5.125	5.0	5.125	6.0	5.125	7.0	5.125	8.0	5.124
Time since start [H]	Output Voltage [V]																								
0.0	5.127																								
0.5	5.125																								
1.0	5.125																								
2.0	5.125																								
3.0	5.125																								
4.0	5.125																								
5.0	5.125																								
6.0	5.125																								
7.0	5.125																								
8.0	5.124																								



Model		LCA150S-5	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+5.0V30A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0.00~30.00 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0.00~30.00 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-10	132	30.00	5.129	±7	±0.2
Minimum Voltage	50	132	0.00	5.116		



COSEL		
Model	LCA150S-5	
Item	Condensation 結露特性	Testing Circuitry Figure A
Object	+5.0V 30A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	5.121	Input Volt. : 100V, Load Current: 30A
Line Regulation [mV]	2	Input Volt. : 85~132V, Load Current: 30A
Load Regulation [mV]	5	Input Volt. : 100V, Load Current: 0~30A



Model		LCA150S-5	Temperature		25°C
Item		Leakage Current 漏洩電流	Testing Circuitry		Figure B
Object		_____			

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.18	0.20	0.27
(B) IEC60950	0.18	0.21	0.27

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。



Model		LCA150S-5		
Item		Line Noise Tolerance 入力雑音耐量	Temperature	25°C
Object		+5.0V30A	Testing Circuitry	Figure C

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 100 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %




Model	LCA150S-5	Temperature	25°C
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object	_____		

1. Graph


Remarks

Input Volt. 100 V (VCCI Class B)
120 V (FCC Class B)
Load 100 %

規格 1 : [VCCI] Class B(平均値)
規格 2 : [VCCI] Class B(QP)

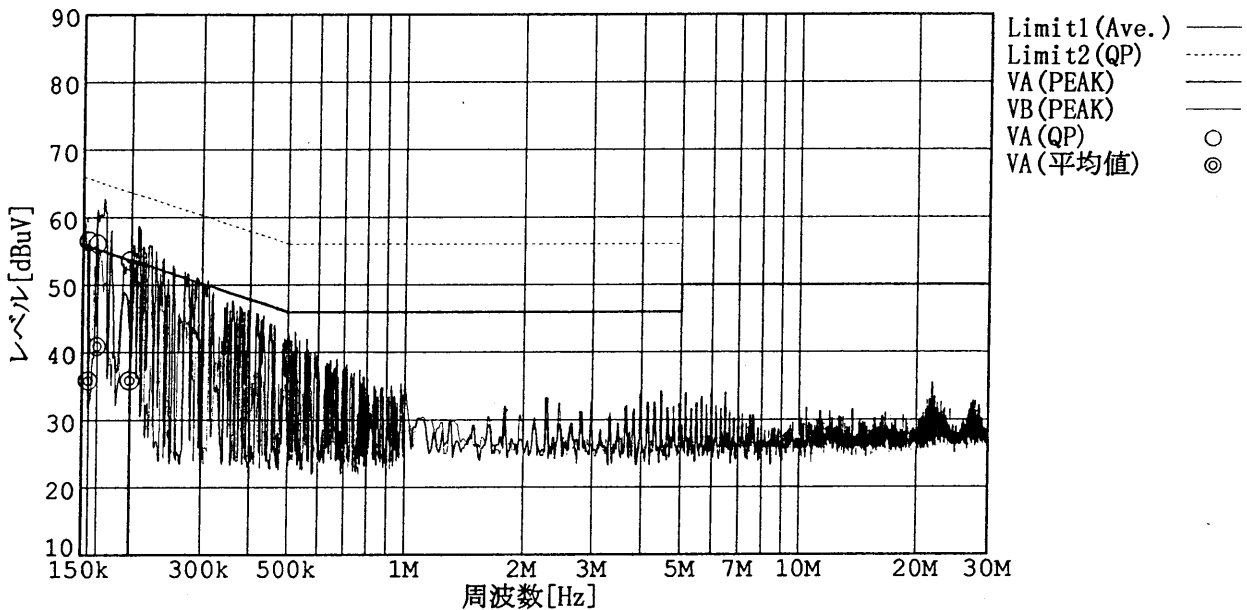

規格 1 : [FCC Part15] Class B

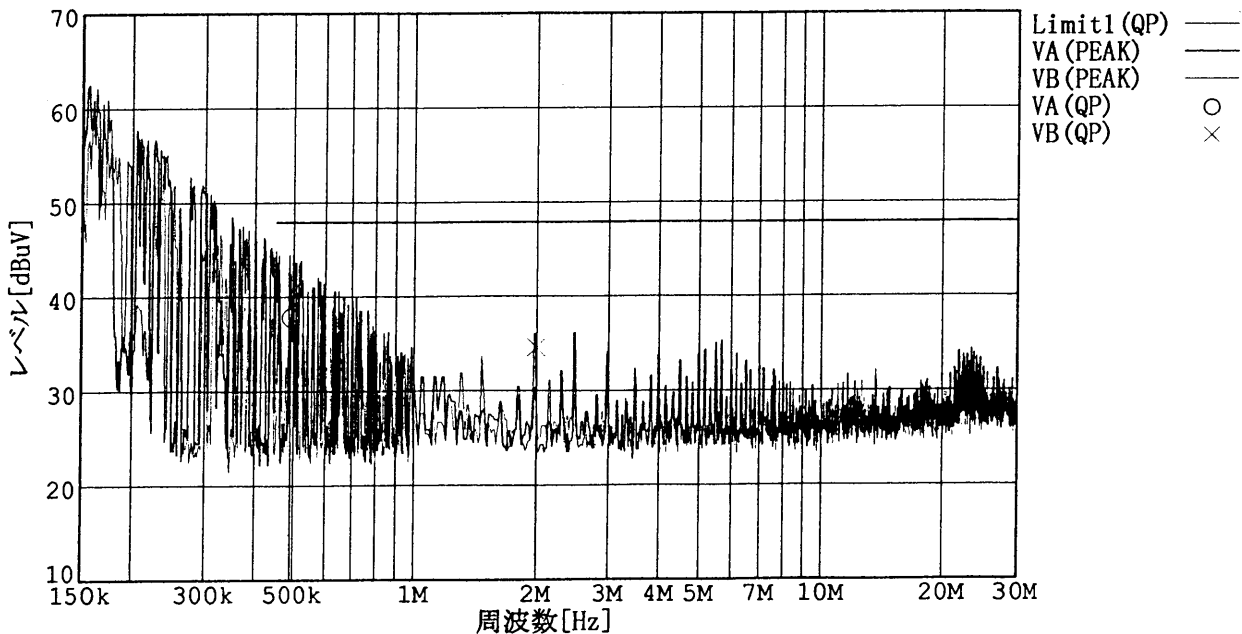

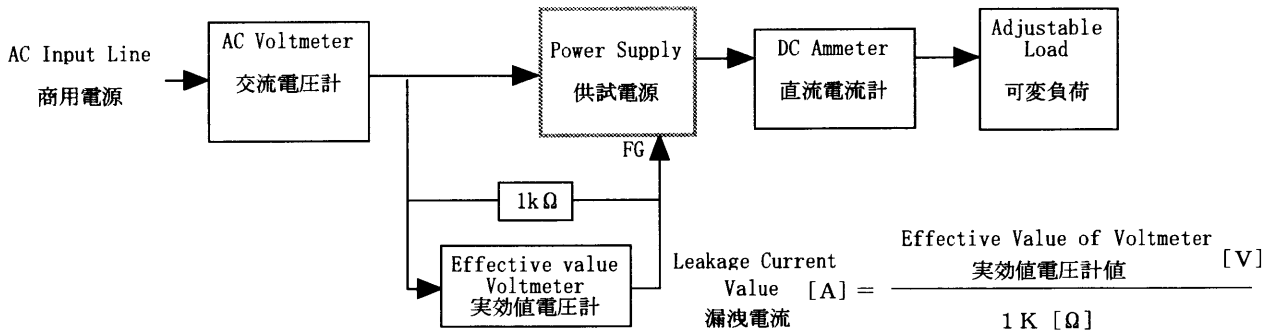
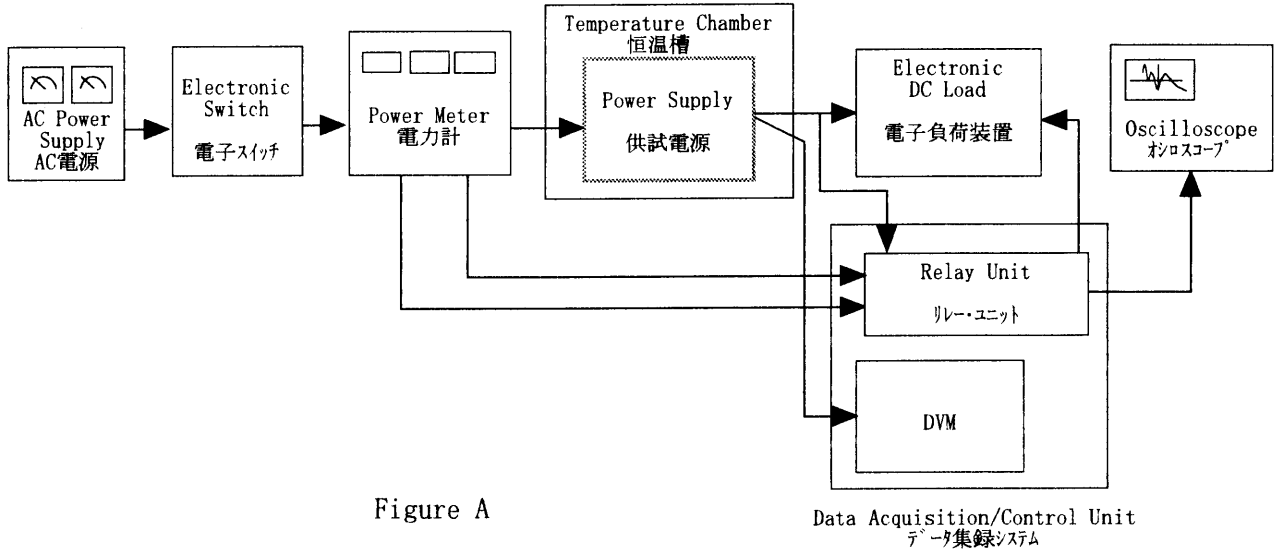


Figure B (DENTORI)

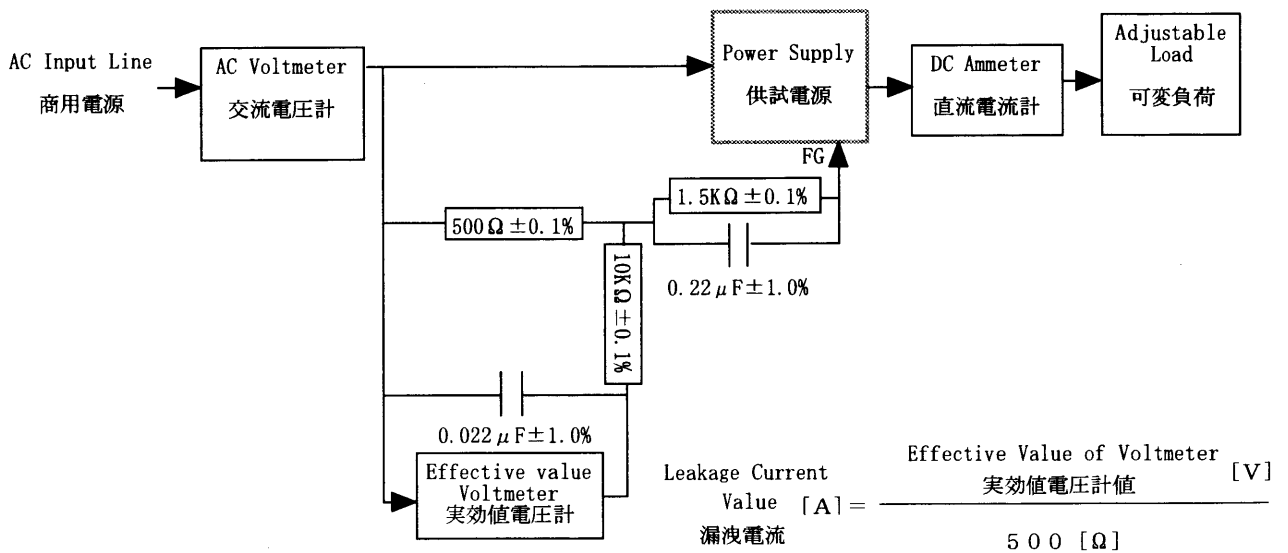


Figure B (IEC 60950)

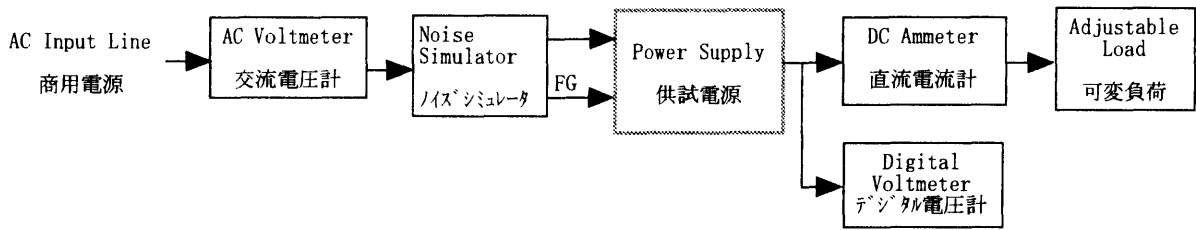


Figure C

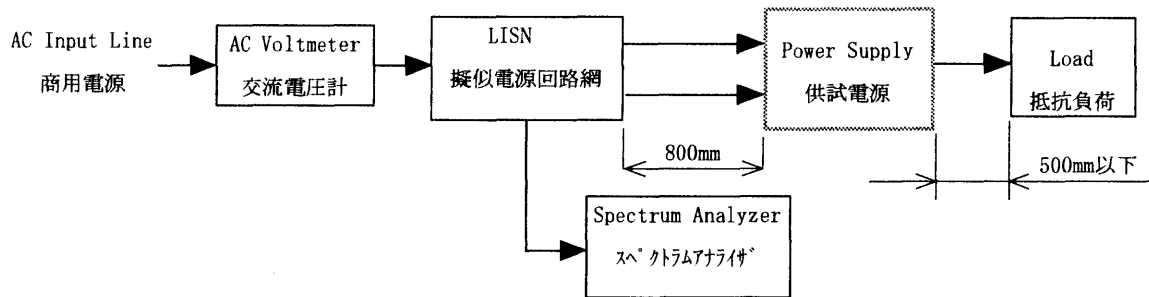


Figure D

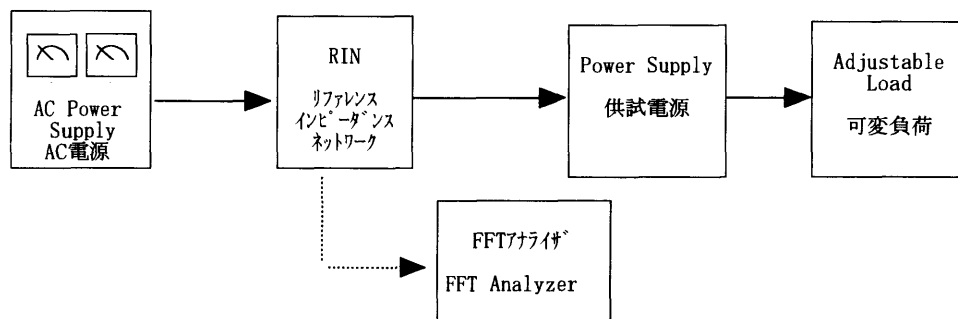


Figure E