




**RADIATED EMISSION**

Model Name : LDA150W-3  
 Model No. :  
 Serial No. :  
 Points : 1  
 Detector : PEAK/QP  
 Polarization : Vertical

Power Supply : 230V(1 Phase) 50Hz  
 Temp. : 25degC  
 Humi. : 44%  
 Date : 2003/4/9 8:52  
 Test Equip. : R3132,ESPC  
 Comment :

Limit: [CISPR 22] Class B<3m>

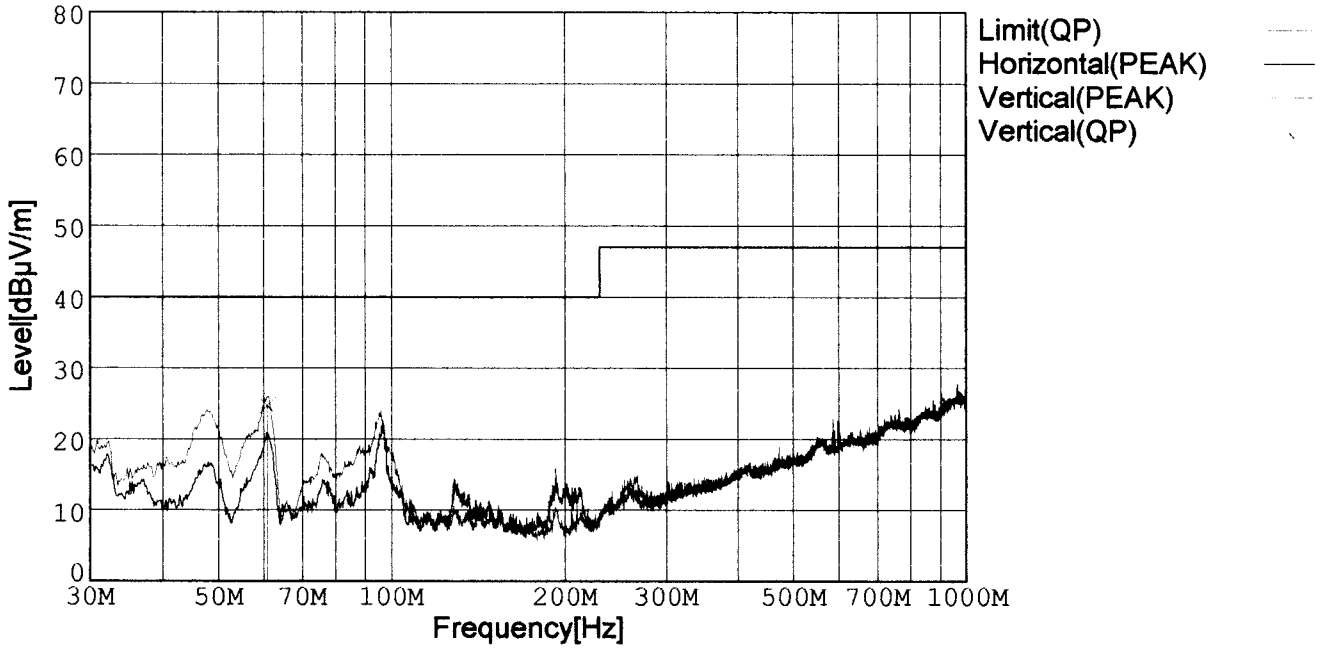

Frequency [MHz]	Meter Reading (QP) [dBµV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBµV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBµV/m]	Margin [dB]
60.845	52.0	BL	4.7	-32.0	24.7	246	114	Vert.	40.0	15.3

BL: Biconi-Log




LINE CONDUCTION

Model Name	: LDA150W-3	Power Supply	: 230V(1 Phase) 50Hz
Model No.	:	Temp.	: 25degC
Serial No.	:	Humi.	: 44%
Points	: 3	Date	: 2003/4/9 7:45
Detector	: PEAK/QP/Ave.	Test Equip.	: R3132,ESPC
Line Mode	: VA/VB	Comment	:

Limit1: [CISPR Pub22] Class B(QP)

Limit2: [CISPR Pub22] Class B(Ave.)

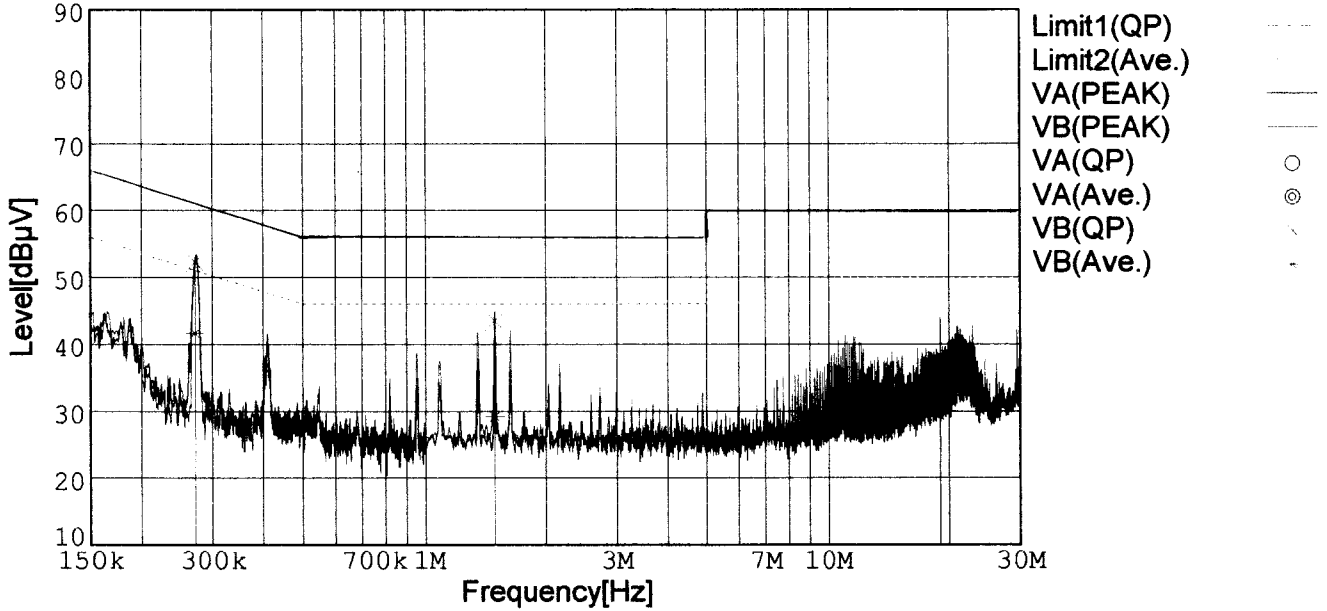

Frequency [MHz]	Meter Reading (QP) [dBµV]	Meter Reading (Ave.) [dBµV]	Factor [dB]	Level (QP) [dBµV]	Level (Ave.) [dBµV]	Line	Limit (QP) [dBµV]	Limit (Ave.) [dBµV]	Margin (QP)[dB]	Margin (Ave.) [dB]
19.0010	26.7	24.1	10.3	37.0	34.4	VA	60.0	50.0	23.0	15.6
0.2714	42.5	31.9	9.8	52.3	41.7	VB	61.1	51.1	8.8	9.4
1.4931	33.6	19.3	9.9	43.5	29.2	VB	56.0	46.0	12.5	16.8