




RADIATED EMISSION

Model Name : LDA30F-3
 Model No. :
 Serial No. :
 Points : 3
 Detector : PEAK/QP
 Polarization : Hori. & Vert.
 Limit: [CISPR 22] Class B<3m>

Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Humi. : 44%
 Date : 2003/4/11 7:07
 Test Equip. : R3132,ESPC
 Comment : Io=100%

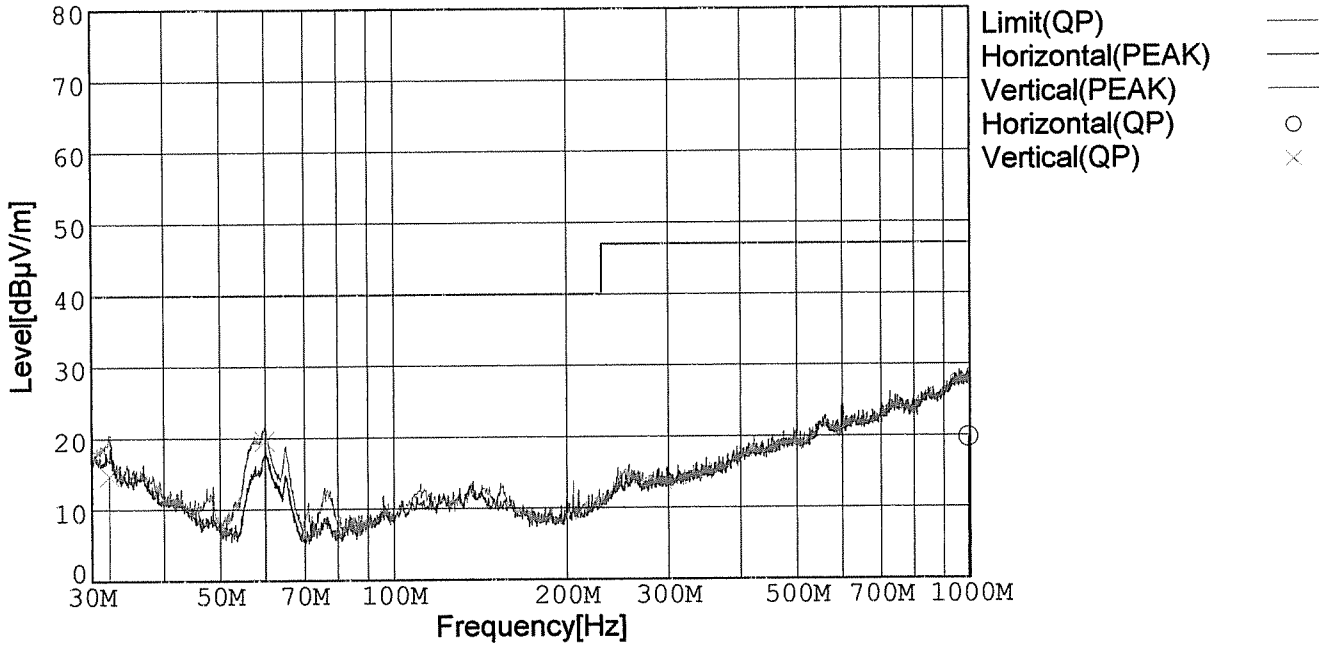

Frequency [MHz]	Meter Reading (QP) [dBµV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBµV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBµV/m]	Margin [dB]
32.190	29.8	BL	17.1	-32.2	14.7	161	136	Vert.	40.0	25.3
59.803	46.9	BL	4.7	-32.0	19.6	337	144	Vert.	40.0	20.4
993.525	23.6	BL	25.4	-29.3	19.7	4	146	Hori.	47.0	27.3

BL: Biconi-Log



LINE CONDUCTION

Model Name : LDA30F-3

Model No. :

Serial No. :

Points : 4

Detector : PEAK/QP/Ave.

Line Mode : VA/VB

Limit1: [CISPR Pub22] Class B(QP)

Limit2: [CISPR Pub22] Class B(Ave.)

Power Supply : 230V(1 Phase) 50Hz


Temp. : 25deg C

Humi. : 44%

Date : 2003/4/4 10:26

Test Equip. : R3132,ESPC

Comment : lo=100%

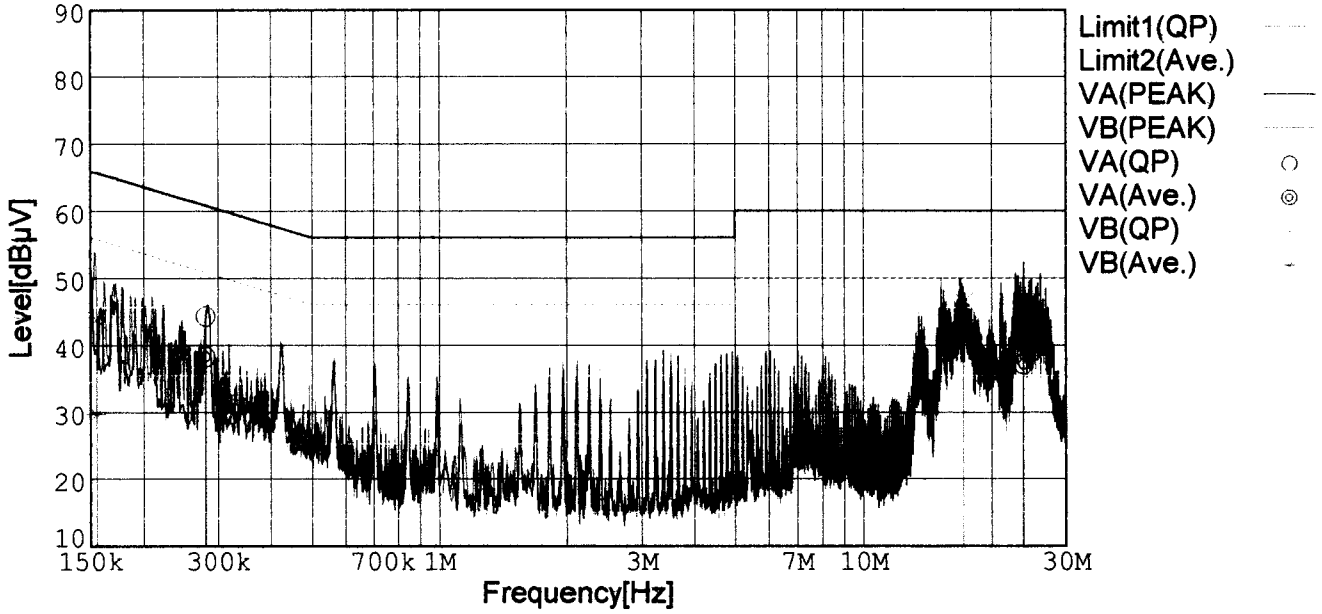

Frequency [MHz]	Meter Reading (QP) [dBµV]	Meter Reading (Ave.) [dBµV]	Factor [dB]	Level (QP) [dBµV]	Level (Ave.) [dBµV]	Line	Limit (QP) [dBµV]	Limit (Ave.) [dBµV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.1552	33.8	19.6	10.0	43.8	29.6	VB	65.7	55.7	21.9	26.1
0.2800	34.2	28.2	10.0	44.2	38.2	VA	60.8	50.8	16.6	12.6
17.2584	35.7	30.3	10.8	46.5	41.1	VB	60.0	50.0	13.5	8.9
23.8786	32.7	26.2	10.9	43.6	37.1	VA	60.0	50.0	16.4	12.9