



DATA SHEET		Date	04-Aug-09
Model	LFA50F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	S.IMAMURA

LINE CONDUCTION
 Model Name : LFA50F-12
 Model No. :
 Serial No. :
 Points : 5
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC 230V 50Hz
 Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)
 Temp. : 25 degreeC
 Humi. : 45%
 Date : 2009/6/11 13:39
 Test Equip. : R3132. ESPC
 Load Line : 150mm
 Comment :

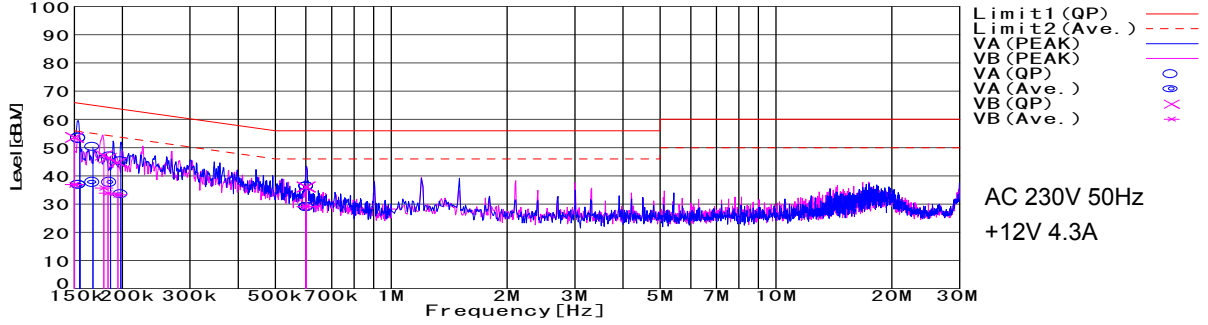

Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1551	26.8	43.4	9.8	36.6	53.2	VA	55.7	65.7	19.1	12.5
0.1678	27.7	40.4	9.8	37.5	50.2	VA	55.1	65.1	17.6	14.9
0.1864	27.8	37	9.8	37.6	46.8	VB	54.2	64.2	16.6	17.4
0.1983	23.4	35.5	9.8	33.2	45.3	VB	53.7	63.7	20.5	18.4
0.6009	19	26.3	9.9	28.9	36.2	VB	46	56	17.1	19.8

RADIATED EMISSION
 Model Name : LFA50F-12
 Model No. :
 Serial No. :
 Points : 2
 Detector : PEAK/QP
 Polarization : Horizontal
 Power Supply : AC 230V 50Hz
 Limit: [EN 55022] Class B<3m>
 Temp. : 25 degreeC
 Humi. : 45%
 Date : 2009/6/12 0:28
 Test Equip. : R3132. ESPC
 Load Line : 150mm
 Comment :

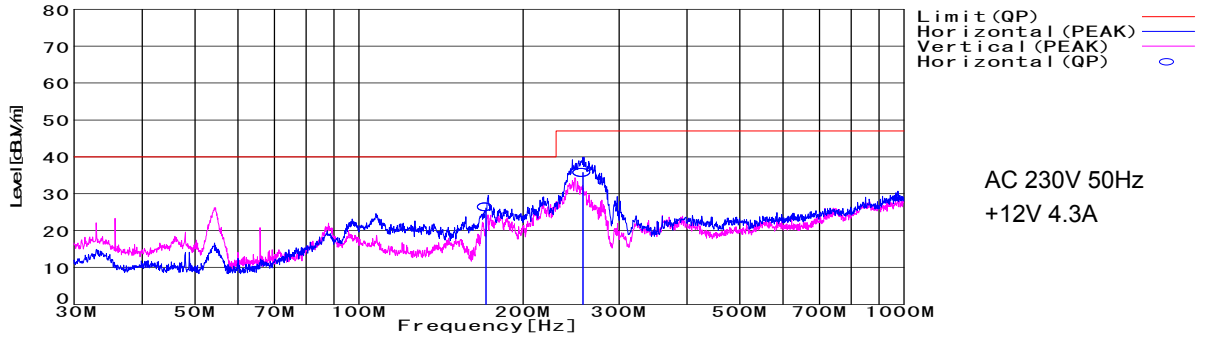


Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
171.093	41.2	BL	8.6	-23.7	26.1	252	158	Hori.	40	13.9
257.782	46	BL	13.1	-23.4	35.7	55	107	Hori.	47	11.3

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

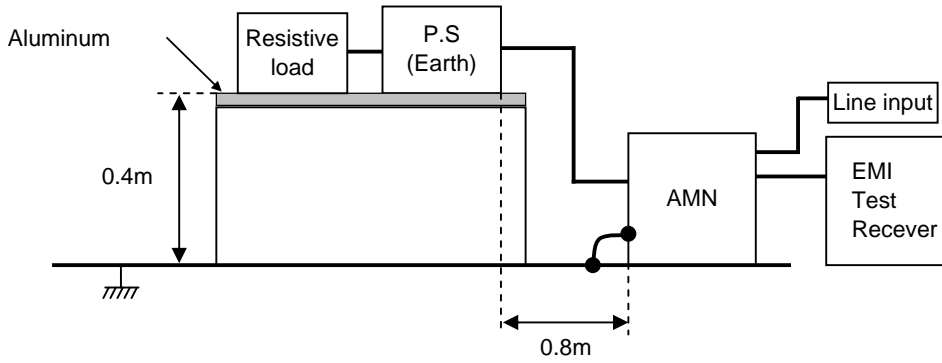

2. Radiated emission

