


DATA SHEET		Date	04-Aug-09
Model	LFA50F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	S.IMAMURA

LINE CONDUCTION

Model Name : LFA50F-15
 Model No. :
 Serial No. :
 Points : 5
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC 230V 50Hz
 Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

Temp. : 25 degreeC
 Humi. : 45%
 Date : 2009/6/11 13:48
 Test Equip. : R3132, ESPC
 Load Line : 150mm
 Comment :

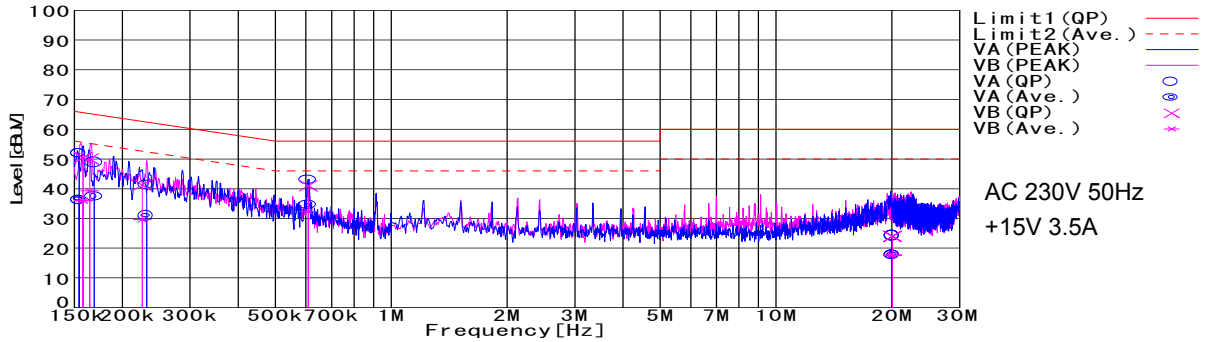


Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1544	26.5	41.9	9.8	36.3	51.7	VA	55.8	65.8	19.5	14.1
0.169	27.5	39	9.8	37.3	48.8	VA	55	65	17.7	16.2
0.2312	21.1	31.5	9.8	30.9	41.3	VA	52.4	62.4	21.5	21.1
0.6089	24.5	33	9.9	34.4	42.9	VB	46	56	11.6	13.1
20.0636	7.4	13.8	10.3	17.7	24.1	VB	50	60	32.3	35.9

RADIATED EMISSION

Model Name : LFA50F-15
 Model No. :
 Serial No. :
 Points : 1
 Detector : PEAK/QP
 Polarization : Hori. & Vert.
 Power Supply : AC 230V 50Hz
 Limit: [EN 55022] Class B<3m>

Temp. : 25 degreeC
 Humi. : 45%
 Date : 2009/6/26 3:21
 Test Equip. : R3132, ESPC
 Load Line : 150mm
 Comment :

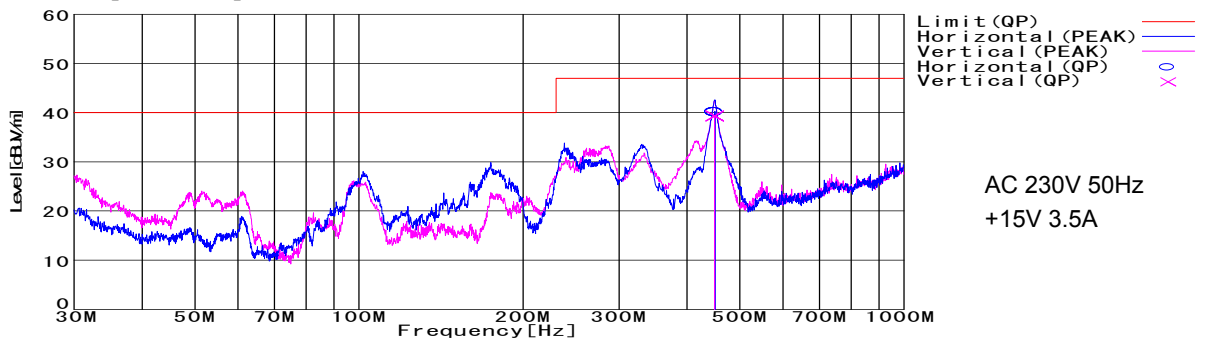


Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
449.43	52.9	BL	16.9	-30.5	39.3	332	113	Vert.	47	7.7

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

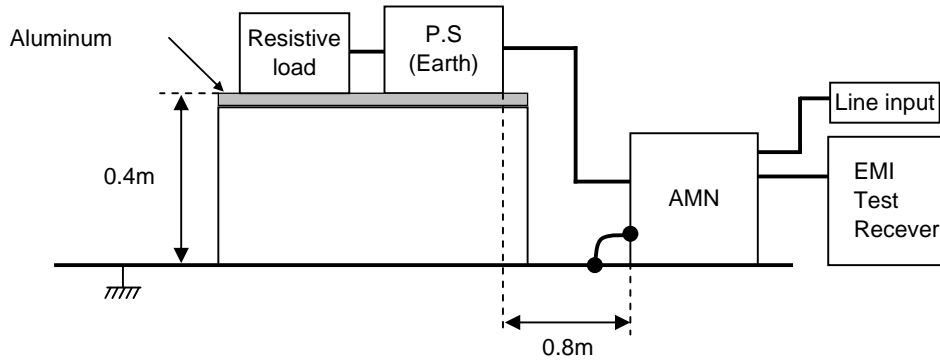

2. Radiated emission

