



DATA SHEET		Date	10-Oct-19
Model	LHA30F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

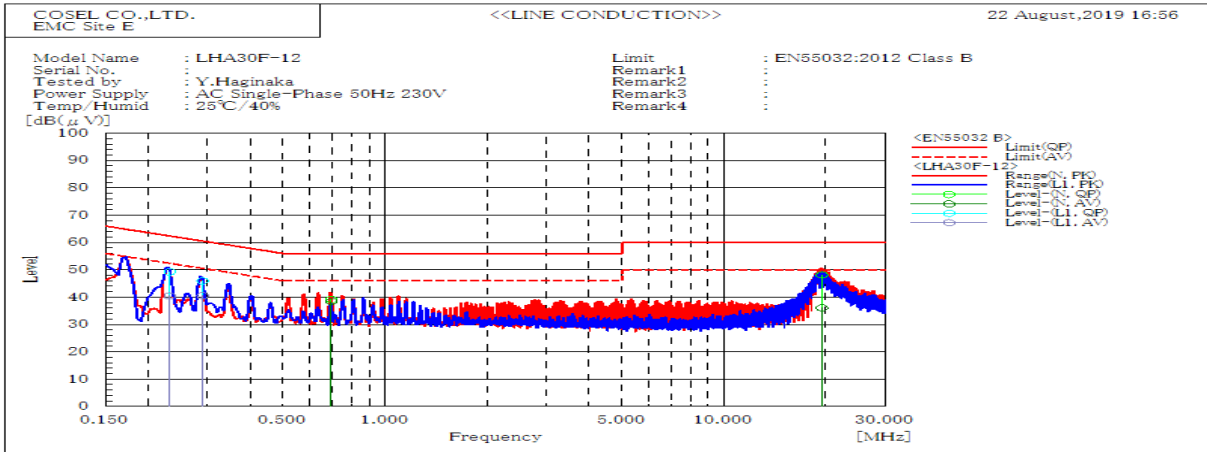


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.696	N	39.1	38.4	56	56	16.9	7.6	Pass	
19.438	N	48.1	36.1	60	60	11.9	13.9	Pass	
0.231	L1	49.3	40.4	62.4	52.4	13.1	12	Pass	
0.29	L1	45.9	40.6	60.5	50.5	14.6	9.9	Pass	

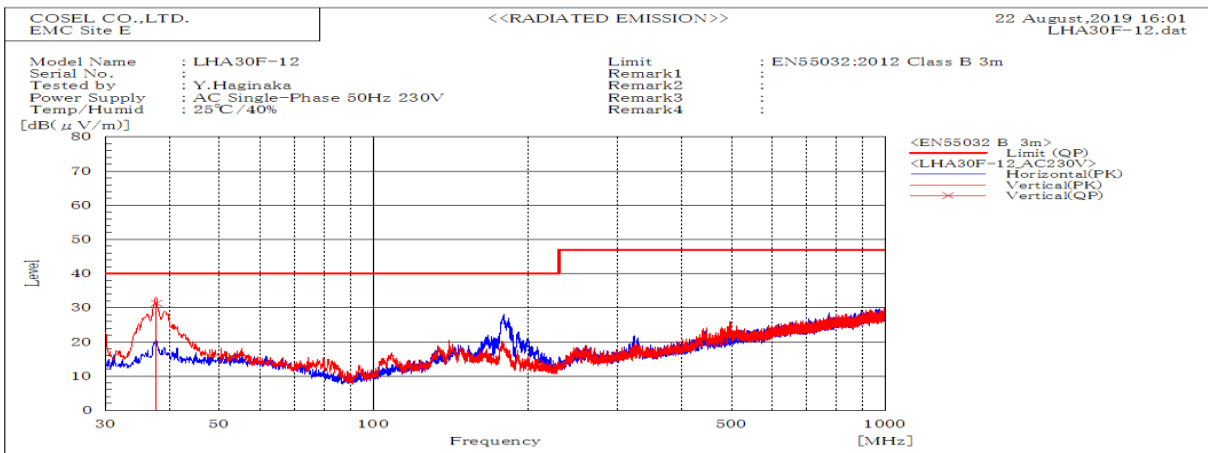


Frequency MHz	Polarization	Stability	Level dB(uV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
37.727	V	Stable	31.3	40	8.7	Pass	100.2	312.7	

DATA SHEET		Date	10-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

1. Line conduction

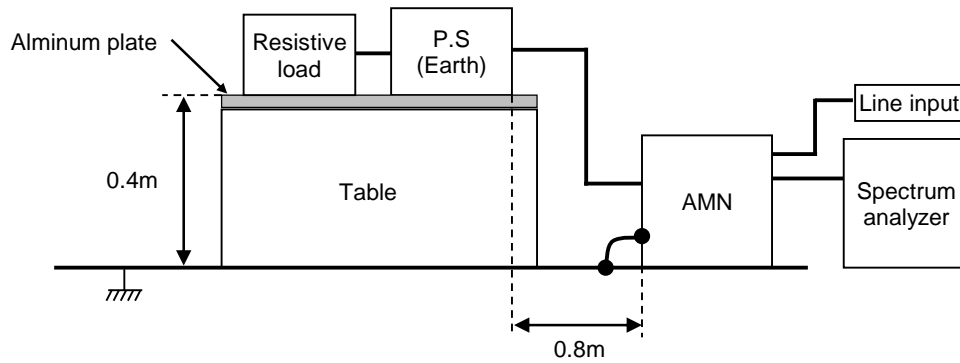

2. Radiated emission

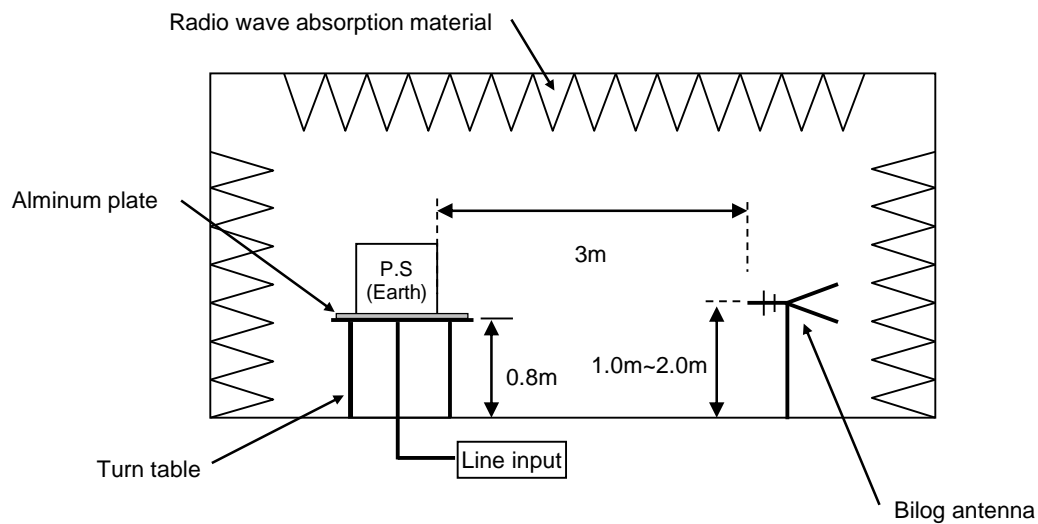

Conditions

Test : EMI
Model Name : LHA30F

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

