


LHA50F-15 Expected Life : 推定寿命

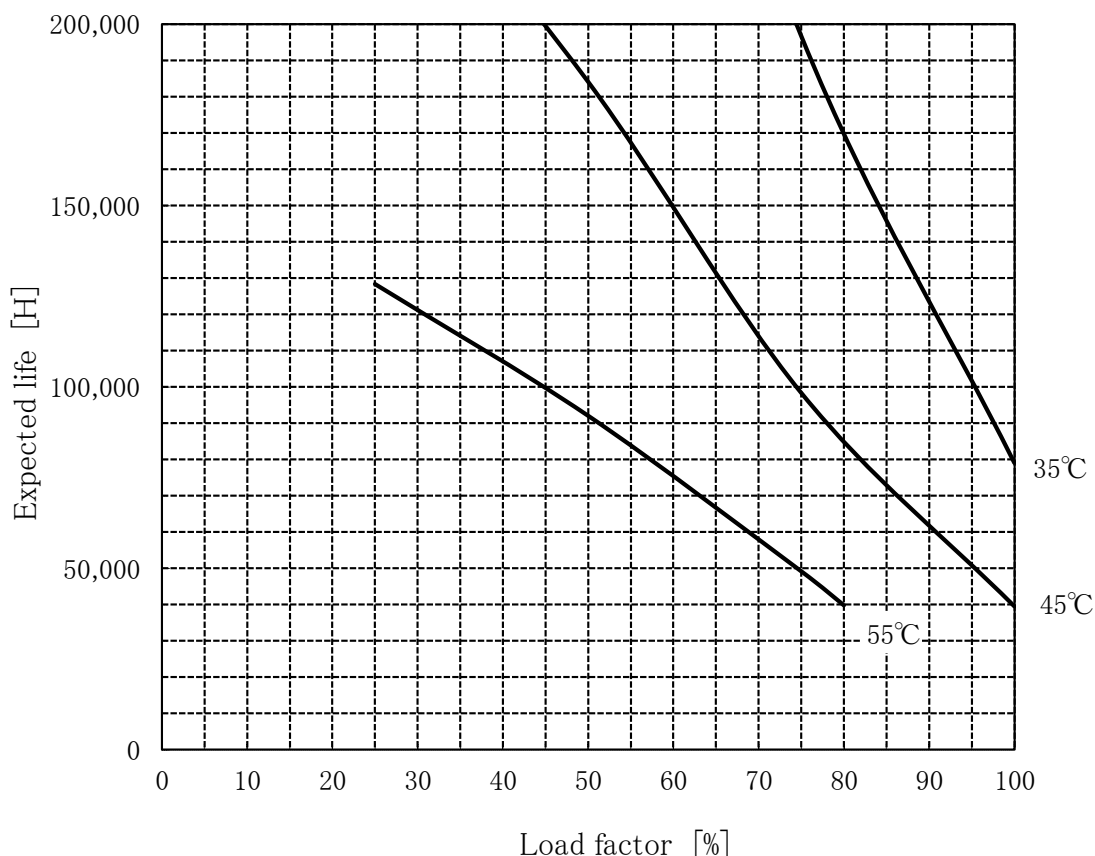

- Above expected life time is calculated according our calculation standard.  
上記推定寿命は、当社算出基準に従い算出したものです。
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.  
10万時間以上の領域では、封ゴムの劣化等の影響は、計算式には含まれていません。

Conditions


(1)Input voltage AC90~264V 60Hz

(2)Output voltage/  
current

| DC<br>OUTPUT | Load factor |        |       |        |
|--------------|-------------|--------|-------|--------|
|              | 100%        | 75%    | 50%   | 25%    |
| 15V          | 3.5A        | 2.625A | 1.75A | 0.875A |

(3)Cooling method Convection

(4)Mounting method Refer below

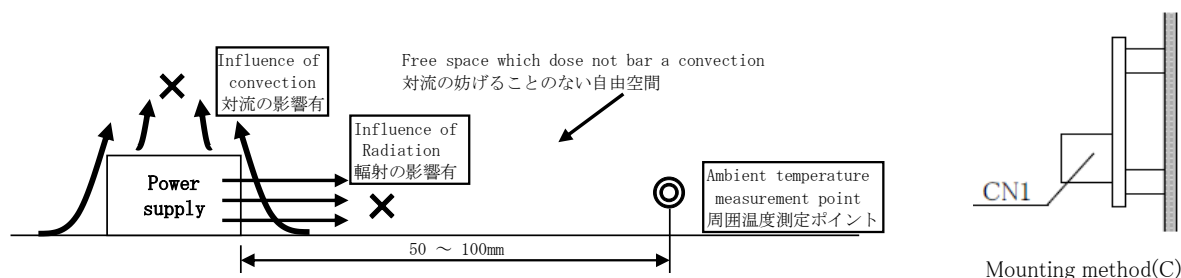

With the ambient temperature of graph, it measures in the enviroment of a figure.  
グラフの周囲温度とは、図の環境で測定したものです。