



DATA SHEET		Date	09-Oct-19
Model	LHA75F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

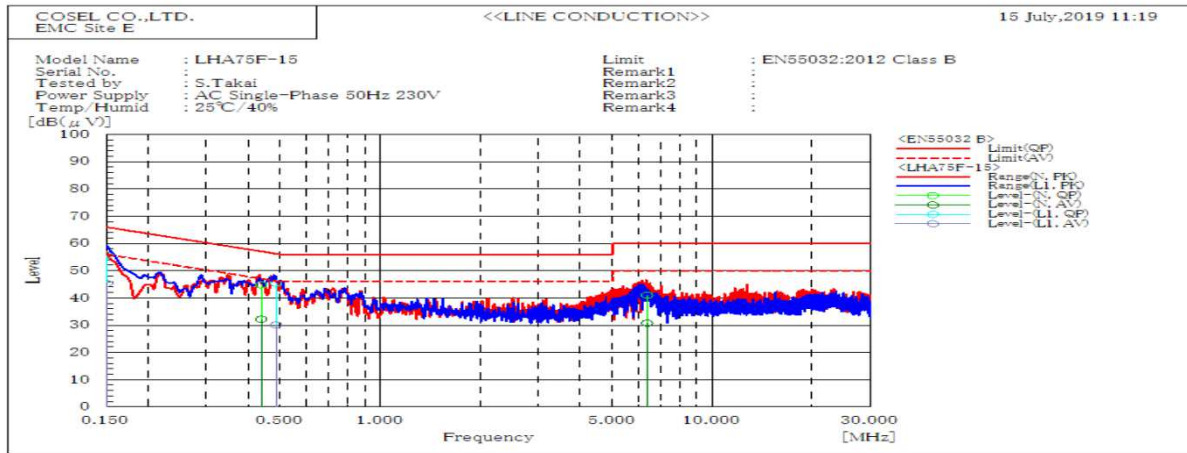


Frequency MHz	Line	Level		Limit		Margin		Pass/Fail	Remark
		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.15	L1	55.8	45.4	66	56	10.2	10.6	Pass	
0.486	L1	45.4	30.2	56.2	46.2	10.8	16	Pass	
0.438	N	44.9	32.2	57.1	47.1	12.2	14.9	Pass	
6.366	N	41	30.8	60	50	19	19.2	Pass	

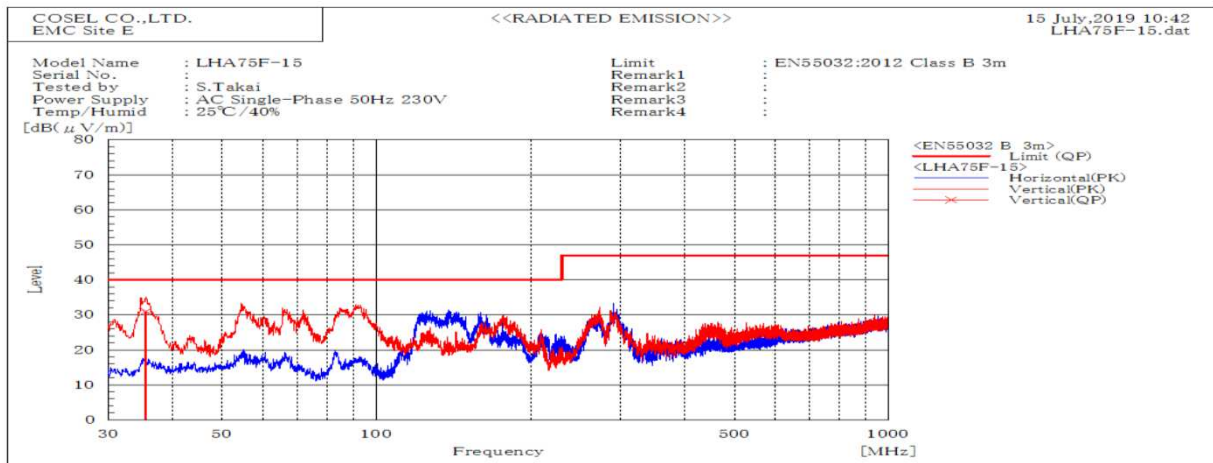


Frequency MHz	Polarization	Stability	Level		Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m)	dB(μV/m)						
35.521	V	Stable	31	40	9	Pass	100.2	219.3		
35.293	V	Stable	30.9	40	9.1	Pass	100.2	305.8		

DATA SHEET		Date	09-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

**1. Line conduction**

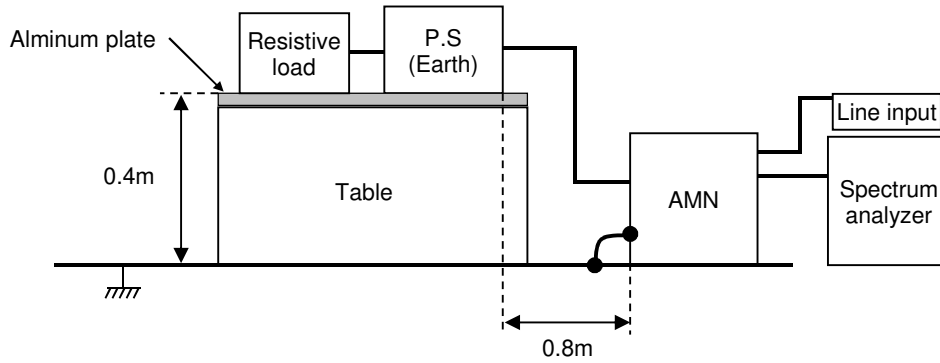

**2. Radiated emission**

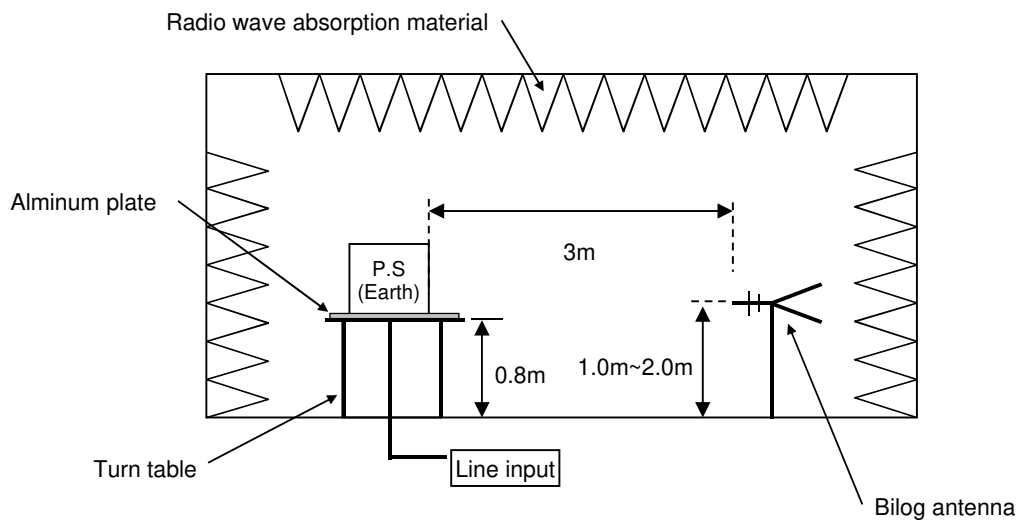

Conditions

Test : EMI  
 Model Name : LHA75F-15

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

