



DATA SHEET		Date	09-Oct-19
Model	LHA75F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

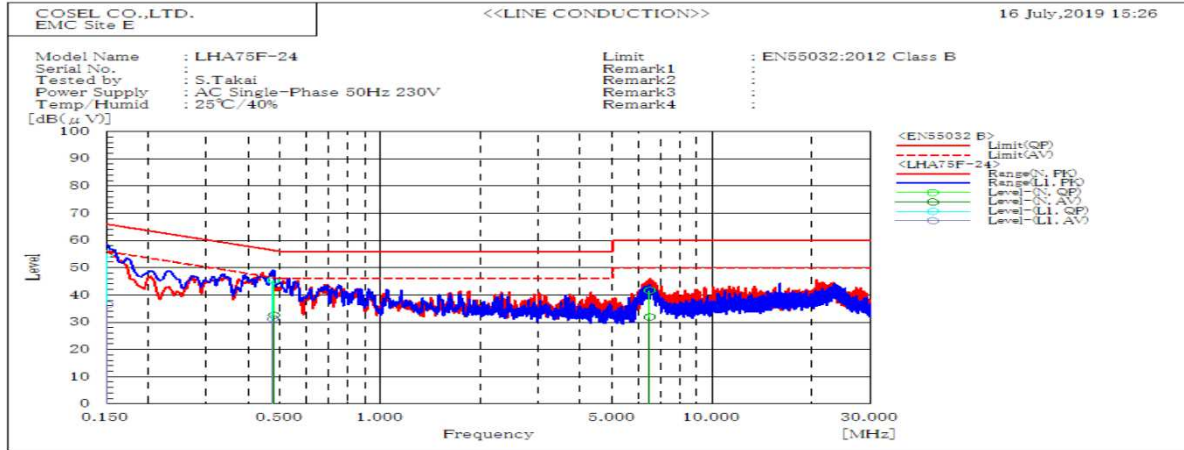


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
		0.151	L1	55.2	36.5	65.9	55.9		
0.476	L1	45.3	31.3	56.4	46.4	11.1	15.1	Pass	
6.475	N	41.7	31.9	60	50	18.3	18.1	Pass	
0.479	N	45.3	32.6	56.4	46.4	11.1	13.8	Pass	

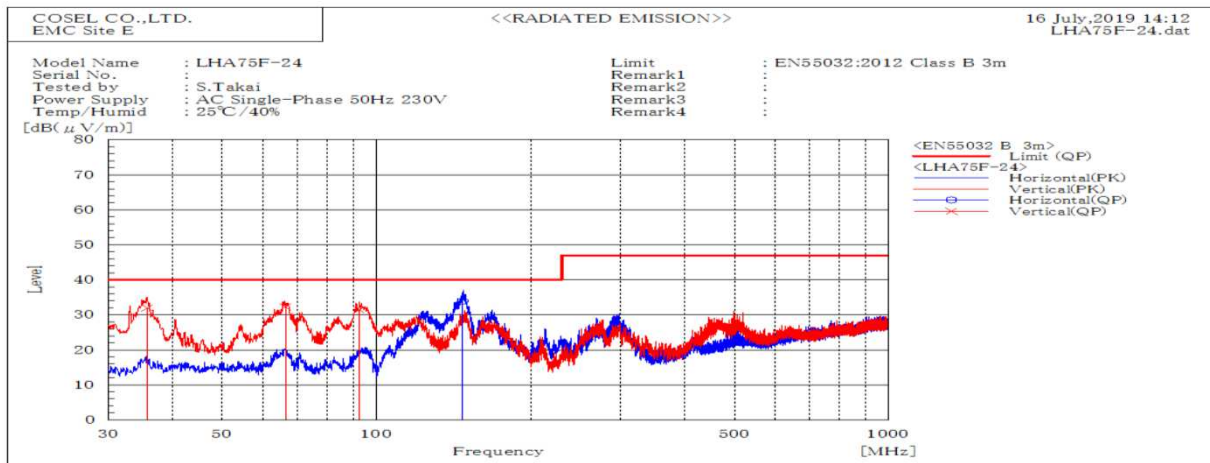


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
35.702	V	Stable	32	40	8	Pass	100.2	149.6	
66.524	V	Stable	32.3	40	7.7	Pass	100.6	300.1	
92.634	V	Stable	31.4	40	8.6	Pass	100.6	250.8	
147.625	H	Stable	33.9	40	6.1	Pass	198.8	13.9	

DATA SHEET		Date	09-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

1. Line conduction

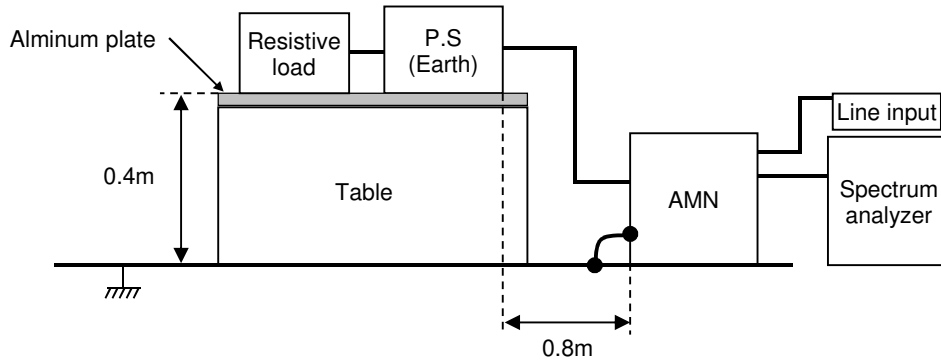

2. Radiated emission

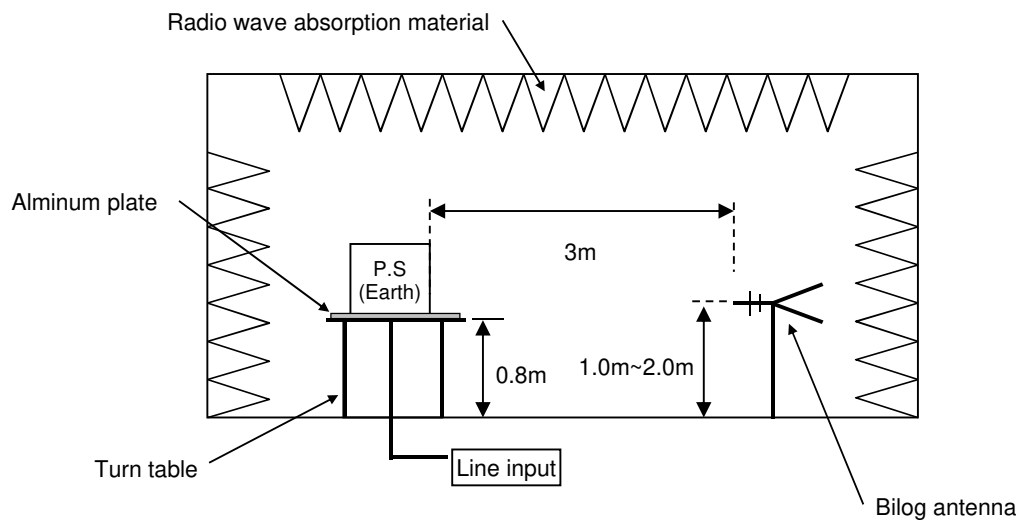

Conditions

Test : EMI
Model Name : LHA75F-24

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

