



DATA SHEET		Date	09-Oct-19
Model	LHA75F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

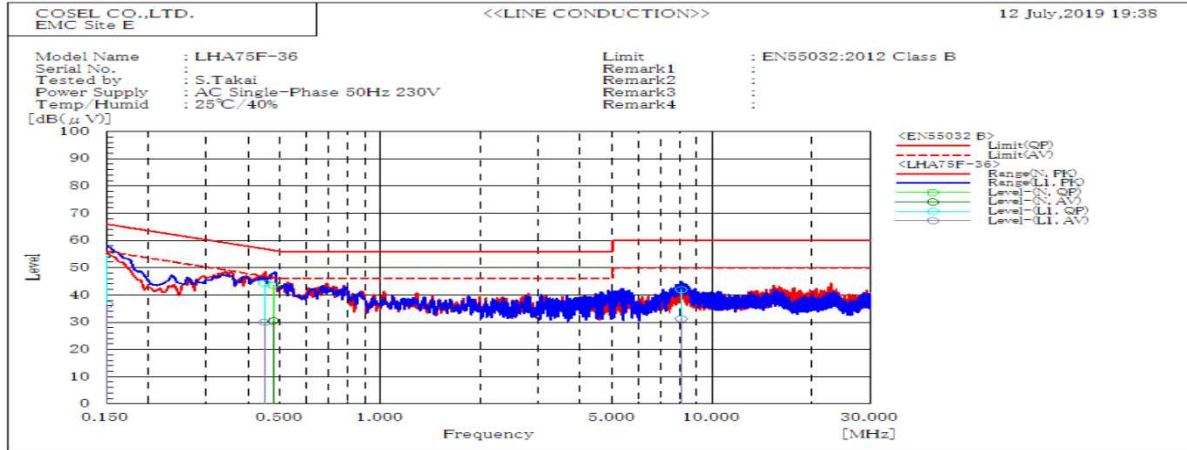


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
		0.151	L1	54.8	36.5	66	56		
0.449	L1	44.3	30	56.9	46.9	12.6	16.9	Pass	
8.061	L1	42	31.3	60	50	18	18.7	Pass	
0.476	N	43.6	30.4	56.4	46.4	12.8	16	Pass	

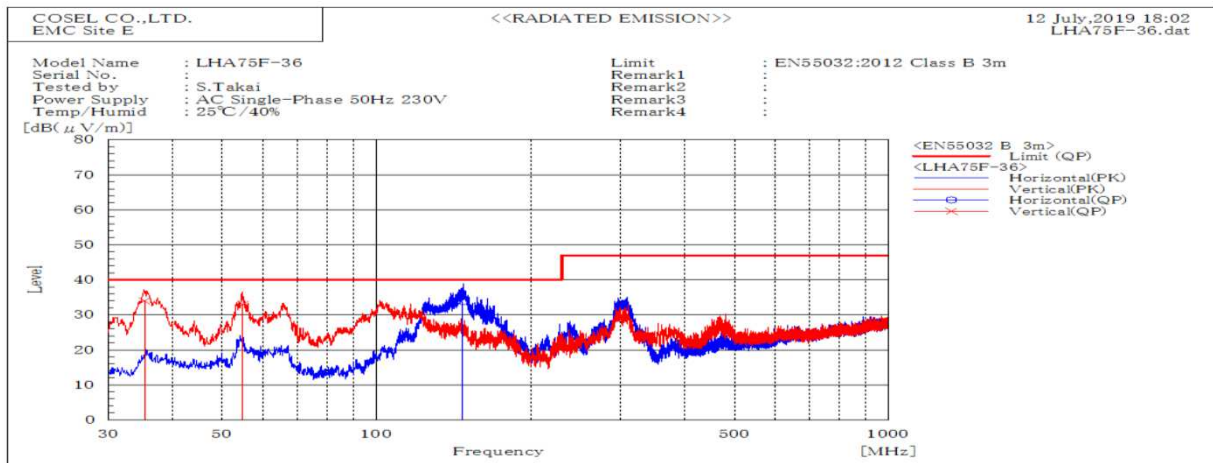


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
35.282	V	Stable	34	40	6	Pass	100	191.9	
54.852	V	Stable	33.1	40	6.9	Pass	100	250	
147.622	H	Stable	33.8	40	6.2	Pass	199.7	11.4	

DATA SHEET		Date	09-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

1. Line conduction

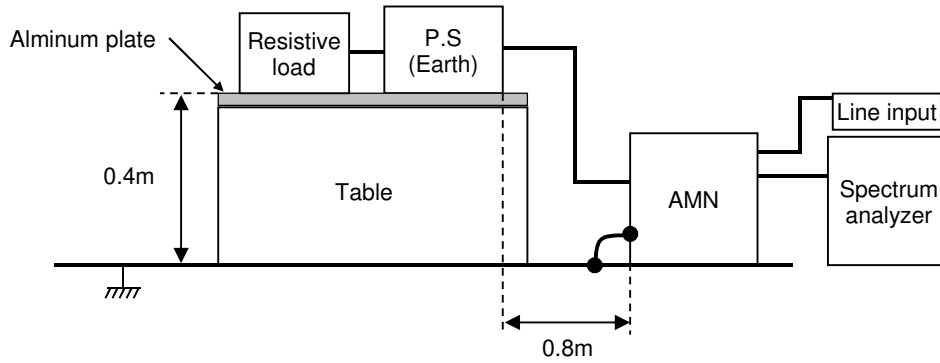

2. Radiated emission

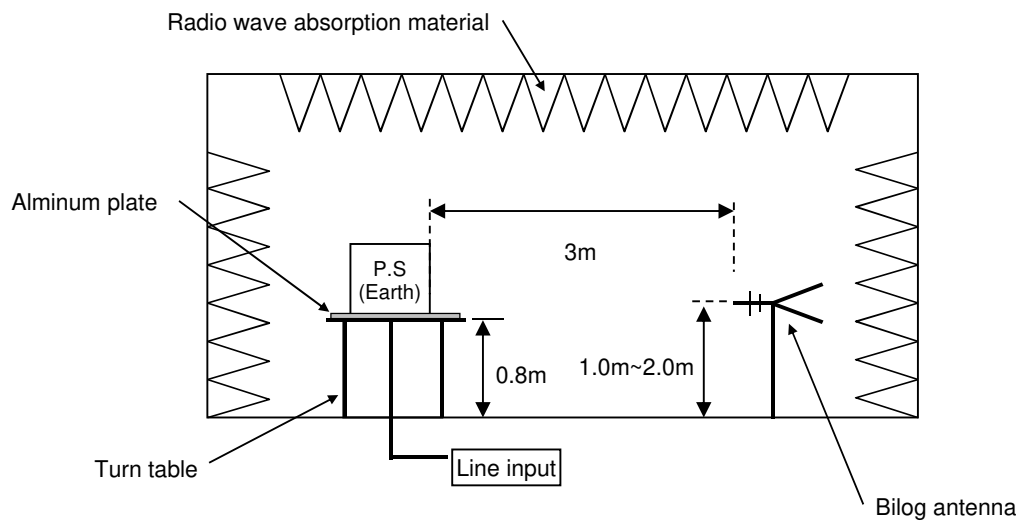

Conditions

Test : EMI
Model Name : LHA75F-36

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

