




**RADIATED EMISSION**

Model Name	: M1T-EDCB-00	Power Supply	: 230V 60Hz 3-phase
Model No.	:	Temp.	: 25 degrees
Serial No.	:	Humi.	: 45%
Points	: 3	Date	: 2001/12/21 17:45
Detector	: PEAK/QP	Test Equip.	: R3132,ESPC
Polarization	: Hori. & Vert.	Comment	:

Limit: [CISPR 22] Class A<3m>

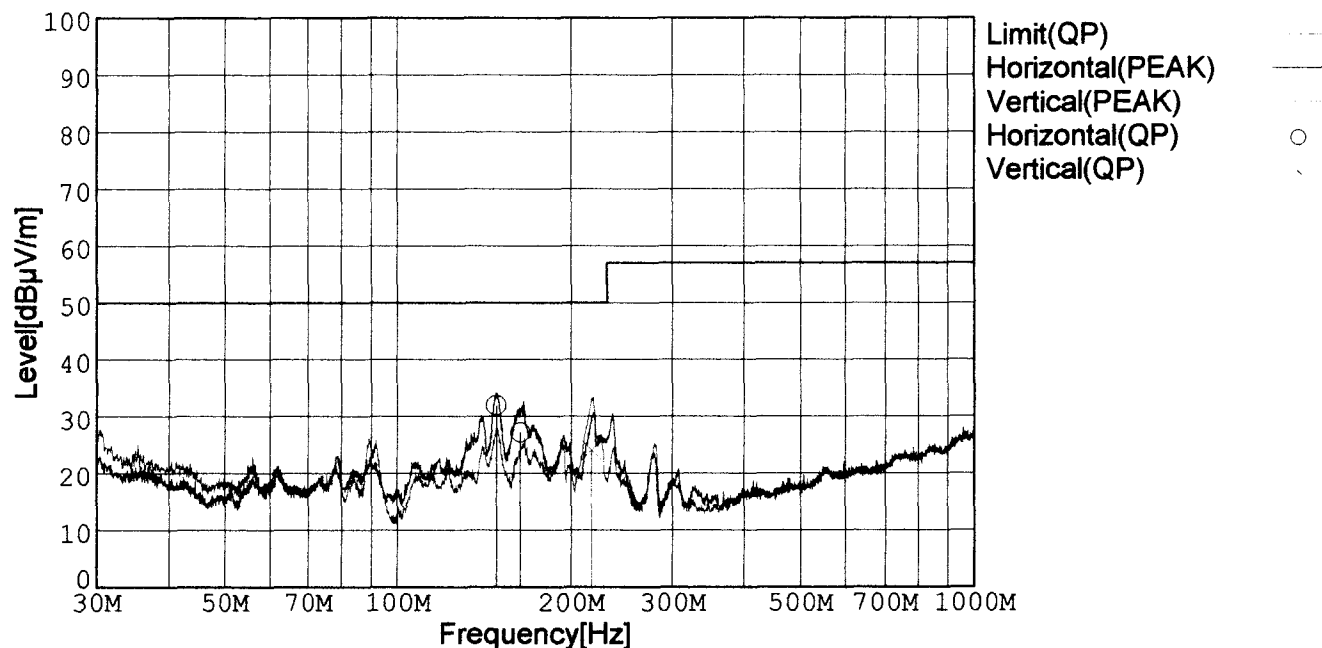


Frequency [MHz]	Meter Reading (QP) [dBµV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBµV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBµV/m]	Margin [dB]
148.314	52.8	BL	10.6	-31.4	32.0	2	158	Hori.	50.0	18.0
163.481	49.0	BL	9.5	-31.3	27.2	351	159	Hori.	50.0	22.8
217.035	46.3	BL	8.8	-31.1	24.0	279	107	Vert.	50.0	26.0

BL: Biconi-Log



LINE CONDUCTION

Model Name	: M1T-EDCB-00	Power Supply	: 230V 60Hz 3-phase
Model No.	:	Temp.	: 25 degrees
Serial No.	:	Humi.	: 45%
Points	: 6	Date	: 2001/12/11 15:09
Detector	: PEAK/QP	Test Equip.	: R3261B,ESPC
Line Mode	: L1/L3	Comment	:
Limit1:	[EN 55011] Class A Gr.1(QP)		
Limit2:	[EN 55011] Class A Gr.1(Ave.)		

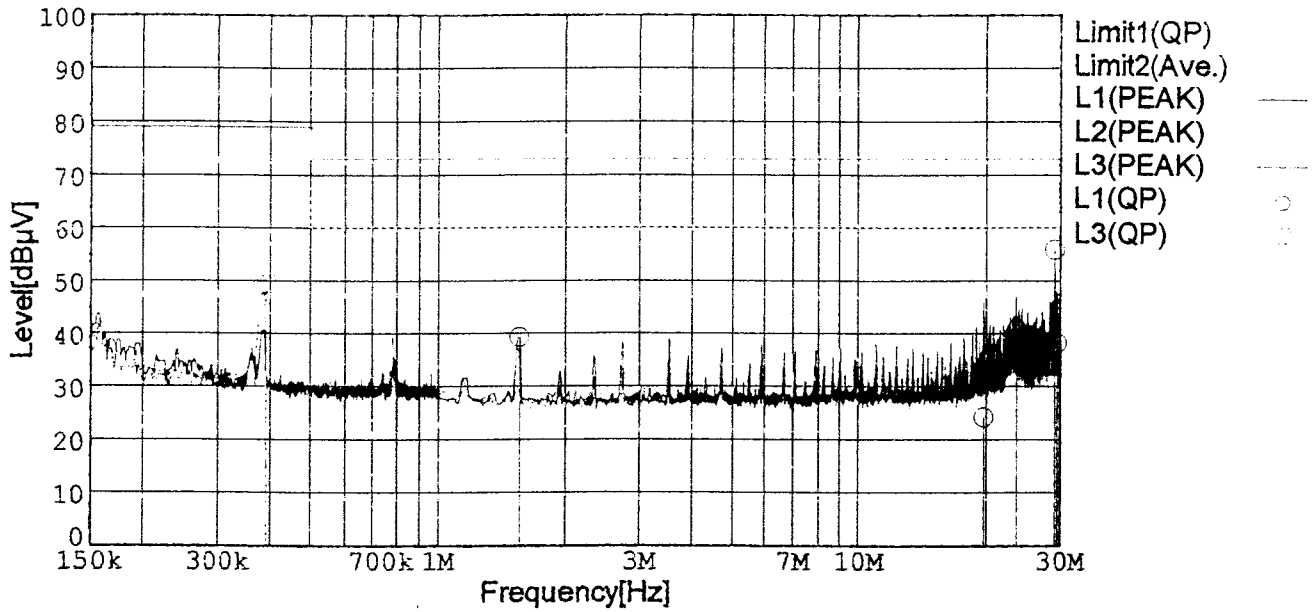

Frequency [MHz]	Meter Reading (QP) [dBµV]	Factor [dB]	Level (QP) [dBµV]	Line	Limit (QP) [dBµV]	Limit (Ave.) [dBµV]	Margin (QP) [dB]	Margin (Ave.) [dB]
1.5484	29.2	10.1	39.3	VA	73.0	60.0	33.7	21.2
23.5814	30.0	10.9	40.9	VA	73.0	60.0	32.1	26.1
28.9762	44.9	11.0	55.9	VA	73.0	60.0	17.1	10.4
29.3579	27.2	11.0	38.2	VA	73.0	60.0	34.8	27.0
0.3877	38.9	10.0	48.9	VC	79.0	66.0	30.1	19.7