




RADIATED EMISSION

Model Name : M1T-IHGF-00
 Model No. :
 Serial No. :
 Points : 3
 Detector : PEAK/QP
 Polarization : Horizontal

Power Supply : 230V 60Hz 3-phase
 Temp. : 25 degrees
 Humi. : 45%
 Date : 2001/12/17 11:30
 Test Equip. : R3261B,ESPC
 Comment :

Limit: [EN 55011] Class A Group 1<3m>

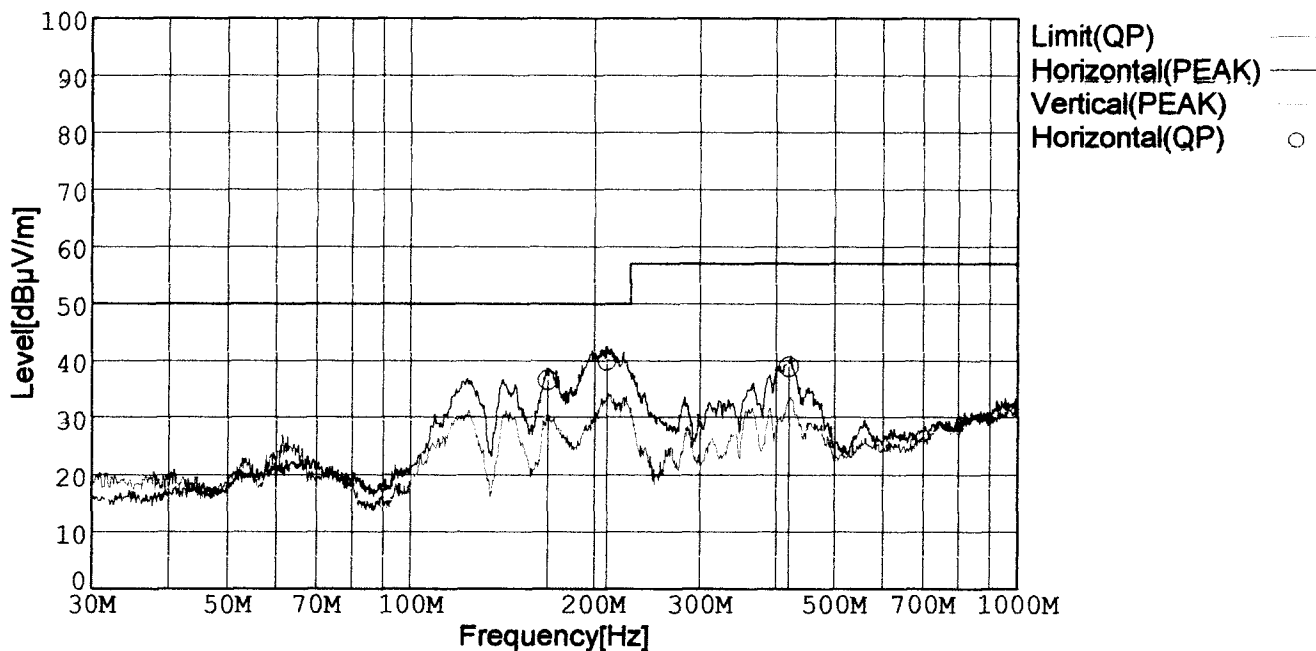


Frequency [MHz]	Meter Reading (QP) [dBµV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBµV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBµV/m]	Margin [dB]
167.444	51.8	BL	8.8	-24.0	36.6	148	140	Hori.	50.0	13.4
209.664	55.3	BL	8.4	-23.7	40.0	359	159	Hori.	50.0	10.0
418.891	46.0	BL	16.5	-23.5	39.0	211	101	Hori.	57.0	18.0

BL: Biconi-Log



LINE CONDUCTION

Model Name	: M1T-IHGF-00	Power Supply	: 230V 60Hz 3-phase
Model No.	:	Temp.	: 25 degrees
Serial No.	:	Humi.	: 45%
Points	: 5	Date	: 2001/12/11 15:38
Detector	: PEAK/QP	Test Equip.	: R3261B,ESPC
Line Mode	: L1/L2/L3	Comment	:
Limit1: [EN 55011] Class A Gr.1(QP)			
Limit2: [EN 55011] Class A Gr.1(Ave.)			

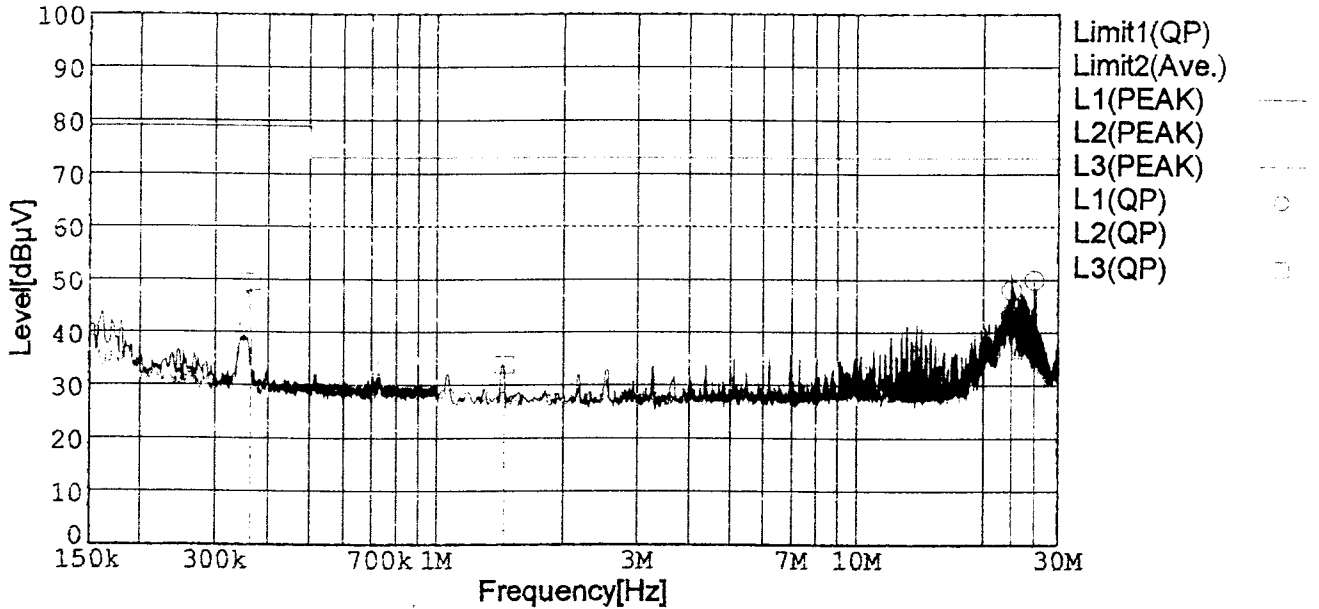

Frequency[MHz]	Meter Reading (QP)[dBµV]	Factor[dB]	Level(QP) [dBµV]	Line	Limit(QP) [dBµV]	Limit(Ave.) [dBµV]	Margin (QP)[dB]	Margin (Ave.)[dB]
23.1278	37.2	10.9	48.1	VA	73.0	60.0	24.9	16.0
26.1839	39.0	10.9	49.9	VA	73.0	60.0	23.1	15.5
22.3178	32.9	10.9	43.8	VB	73.0	60.0	29.2	20.2
0.3607	39.0	10.0	49.0	VC	79.0	66.0	30.0	19.6
1.4390	23.2	10.1	33.3	VC	73.0	60.0	39.7	27.1