

Temperature increase of main components

Model: MGFS8048□□


1. Conditions

- (1) Input :DC 48 [V]
- (2) Output :Rated output
- (3) Cooling method :Convection cooling
- (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase ( $\Delta T$ )				Rated temp. [°C]	Reference
			[deg]					
			3.3V	5V	12V	15V		
1	Switching MOS-FET	TR101	49	53	51	45	150	Junction Temp.
2	Input Choke Coil	L101	39	43	41	34	125	
3	Rectified MOS-FET(Output)	TR502	56	65	53	47	150	Junction Temp.
4	Output Choke Coil	L501	46	61	44	38	125	
5	CASE	CASE	43	50	43	40	105	Top Surface Center
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

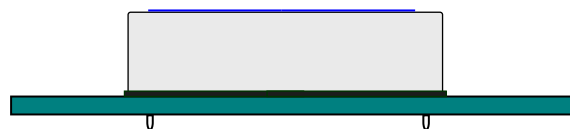

(Side view)

Fig.1.1 Mounting method  
(Normal position)