

TEST DATA OF MGS152405

Regulated DC Power Supply
September 9, 2010

Approved by : *Kazunari Asano*
Kazunari Asano Design Manager

Prepared by : *Junki Nakayama*
Junki Nakayama Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Input Voltage)	1
2.Input Current (by Load Current)	2
3.Input Power (by Load Current)	3
4.Efficiency (by Input Voltage)	4
5.Efficiency (by Load Current)	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple Voltage (by Load Current)	9
10.Ripple-Noise	10
11.Ripple Voltage (by Ambient Temperature)	11
12.Ambient Temperature Drift	12
13.Output Voltage Accuracy	13
14.Time Lapse Drift	14
15.Rise and Fall Time	15
16.Minimum Input Voltage for Regulated Output Voltage	16
17.Overcurrent Protection	17
18.Figure of Testing Circuitry	18

(Final Page 18)



Model		MGS152405	Temperature		25°C																																																																															
Item		Input Current (by Input Voltage)	Testing Circuitry		Figure A																																																																															
Object		_____																																																																																		
1.Graph			2.Values																																																																																	
<p> △ Load 100% □ Load 50% ○ Load 0% </p>			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>4.0</td><td>0.002</td><td>0.001</td><td>0.002</td></tr> <tr><td>8.0</td><td>0.002</td><td>0.003</td><td>0.002</td></tr> <tr><td>16.0</td><td>0.003</td><td>0.003</td><td>0.002</td></tr> <tr><td>16.6</td><td>0.045</td><td>0.529</td><td>1.050</td></tr> <tr><td>16.8</td><td>0.044</td><td>0.519</td><td>1.032</td></tr> <tr><td>17.0</td><td>0.044</td><td>0.514</td><td>1.020</td></tr> <tr><td>18.0</td><td>0.042</td><td>0.485</td><td>0.961</td></tr> <tr><td>20.0</td><td>0.040</td><td>0.436</td><td>0.860</td></tr> <tr><td>22.0</td><td>0.038</td><td>0.397</td><td>0.783</td></tr> <tr><td>24.0</td><td>0.035</td><td>0.364</td><td>0.716</td></tr> <tr><td>28.0</td><td>0.032</td><td>0.314</td><td>0.612</td></tr> <tr><td>30.0</td><td>0.031</td><td>0.294</td><td>0.571</td></tr> <tr><td>32.0</td><td>0.030</td><td>0.276</td><td>0.535</td></tr> <tr><td>36.0</td><td>0.028</td><td>0.247</td><td>0.477</td></tr> <tr><td>40.0</td><td>0.027</td><td>0.223</td><td>0.430</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.0	0.000	0.000	0.000	4.0	0.002	0.001	0.002	8.0	0.002	0.003	0.002	16.0	0.003	0.003	0.002	16.6	0.045	0.529	1.050	16.8	0.044	0.519	1.032	17.0	0.044	0.514	1.020	18.0	0.042	0.485	0.961	20.0	0.040	0.436	0.860	22.0	0.038	0.397	0.783	24.0	0.035	0.364	0.716	28.0	0.032	0.314	0.612	30.0	0.031	0.294	0.571	32.0	0.030	0.276	0.535	36.0	0.028	0.247	0.477	40.0	0.027	0.223	0.430	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																			
	Load 0%	Load 50%	Load 100%																																																																																	
0.0	0.000	0.000	0.000																																																																																	
4.0	0.002	0.001	0.002																																																																																	
8.0	0.002	0.003	0.002																																																																																	
16.0	0.003	0.003	0.002																																																																																	
16.6	0.045	0.529	1.050																																																																																	
16.8	0.044	0.519	1.032																																																																																	
17.0	0.044	0.514	1.020																																																																																	
18.0	0.042	0.485	0.961																																																																																	
20.0	0.040	0.436	0.860																																																																																	
22.0	0.038	0.397	0.783																																																																																	
24.0	0.035	0.364	0.716																																																																																	
28.0	0.032	0.314	0.612																																																																																	
30.0	0.031	0.294	0.571																																																																																	
32.0	0.030	0.276	0.535																																																																																	
36.0	0.028	0.247	0.477																																																																																	
40.0	0.027	0.223	0.430																																																																																	
--	-	-	-																																																																																	
--	-	-	-																																																																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																																																																				



COSEL																																																						
Model	MGS152405	Temperature	25°C																																																			
Item	Input Current (by Load Current)	Testing Circuitry	Figure A																																																			
Object	_____																																																					
<p>1.Graph</p> <p> Input Volt. 18V Input Volt. 24V Input Volt. 36V </p> <p style="text-align: center;">Input Current [A]</p> <p style="text-align: center;">Load Current [A]</p>		<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.042</td><td>0.036</td><td>0.028</td></tr> <tr><td>0.6</td><td>0.215</td><td>0.165</td><td>0.115</td></tr> <tr><td>1.2</td><td>0.393</td><td>0.298</td><td>0.202</td></tr> <tr><td>1.8</td><td>0.582</td><td>0.435</td><td>0.292</td></tr> <tr><td>2.4</td><td>0.765</td><td>0.571</td><td>0.384</td></tr> <tr><td>3.0</td><td>0.961</td><td>0.717</td><td>0.477</td></tr> <tr><td>3.3</td><td>1.056</td><td>0.785</td><td>0.523</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.0	0.042	0.036	0.028	0.6	0.215	0.165	0.115	1.2	0.393	0.298	0.202	1.8	0.582	0.435	0.292	2.4	0.765	0.571	0.384	3.0	0.961	0.717	0.477	3.3	1.056	0.785	0.523	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.0	0.042	0.036	0.028																																																			
0.6	0.215	0.165	0.115																																																			
1.2	0.393	0.298	0.202																																																			
1.8	0.582	0.435	0.292																																																			
2.4	0.765	0.571	0.384																																																			
3.0	0.961	0.717	0.477																																																			
3.3	1.056	0.785	0.523																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						



Model		MGS152405	Temperature 25°C																																																				
Item		Input Power (by Load Current)	Testing Circuitry Figure A																																																				
Object		_____																																																					
1.Graph		<p>—△— Input Volt. 18V</p> <p>---□--- Input Volt. 24V</p> <p>-·-○-·- Input Volt. 36V</p>	2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.76</td><td>0.86</td><td>1.00</td></tr> <tr><td>0.6</td><td>3.87</td><td>3.95</td><td>4.12</td></tr> <tr><td>1.2</td><td>7.08</td><td>7.13</td><td>7.28</td></tr> <tr><td>1.8</td><td>10.38</td><td>10.39</td><td>10.50</td></tr> <tr><td>2.4</td><td>13.76</td><td>13.74</td><td>13.80</td></tr> <tr><td>3.0</td><td>17.23</td><td>17.09</td><td>17.12</td></tr> <tr><td>3.3</td><td>19.05</td><td>18.85</td><td>18.82</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.0	0.76	0.86	1.00	0.6	3.87	3.95	4.12	1.2	7.08	7.13	7.28	1.8	10.38	10.39	10.50	2.4	13.76	13.74	13.80	3.0	17.23	17.09	17.12	3.3	19.05	18.85	18.82	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																						
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																				
0.0	0.76	0.86	1.00																																																				
0.6	3.87	3.95	4.12																																																				
1.2	7.08	7.13	7.28																																																				
1.8	10.38	10.39	10.50																																																				
2.4	13.76	13.74	13.80																																																				
3.0	17.23	17.09	17.12																																																				
3.3	19.05	18.85	18.82																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
<p>Note: Slanted line shows the range of the rated load current.</p>																																																							



COSEL																																			
Model	MGS152405	Temperature	25°C																																
Item	Efficiency (by Input Voltage)	Testing Circuitry	Figure A																																
Object	_____																																		
<p>1.Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p style="text-align: center;">Input Voltage [V]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>17</td><td>86.8</td><td>87.3</td></tr> <tr><td>18</td><td>87.0</td><td>87.5</td></tr> <tr><td>20</td><td>86.9</td><td>87.9</td></tr> <tr><td>24</td><td>86.6</td><td>88.3</td></tr> <tr><td>30</td><td>86.2</td><td>88.5</td></tr> <tr><td>36</td><td>85.5</td><td>88.3</td></tr> <tr><td>40</td><td>84.8</td><td>88.1</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	17	86.8	87.3	18	87.0	87.5	20	86.9	87.9	24	86.6	88.3	30	86.2	88.5	36	85.5	88.3	40	84.8	88.1	--	-	-	--	-	-
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
17	86.8	87.3																																	
18	87.0	87.5																																	
20	86.9	87.9																																	
24	86.6	88.3																																	
30	86.2	88.5																																	
36	85.5	88.3																																	
40	84.8	88.1																																	
--	-	-																																	
--	-	-																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																			



<p>Model MGS152405</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																																			
Item	Efficiency (by Load Current)																																																				
Object	_____																																																				
<p>1.Graph</p> <p> —△— Input Volt. 18V - - □ - - Input Volt. 24V - - ○ - - Input Volt. 36V </p> <p>Efficiency [%]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.6</td><td>78.4</td><td>76.8</td><td>73.5</td></tr> <tr><td>1.2</td><td>85.7</td><td>85.1</td><td>83.4</td></tr> <tr><td>1.8</td><td>87.7</td><td>87.6</td><td>86.7</td></tr> <tr><td>2.4</td><td>88.2</td><td>88.4</td><td>88.0</td></tr> <tr><td>3.0</td><td>87.7</td><td>88.5</td><td>88.3</td></tr> <tr><td>3.3</td><td>87.3</td><td>88.3</td><td>88.4</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Efficiency [%]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.0	-	-	-	0.6	78.4	76.8	73.5	1.2	85.7	85.1	83.4	1.8	87.7	87.6	86.7	2.4	88.2	88.4	88.0	3.0	87.7	88.5	88.3	3.3	87.3	88.3	88.4	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																				
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																		
0.0	-	-	-																																																		
0.6	78.4	76.8	73.5																																																		
1.2	85.7	85.1	83.4																																																		
1.8	87.7	87.6	86.7																																																		
2.4	88.2	88.4	88.0																																																		
3.0	87.7	88.5	88.3																																																		
3.3	87.3	88.3	88.4																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					



COSEL																																			
Model	MGS152405	Temperature	25°C																																
Item	Line Regulation	Testing Circuitry	Figure A																																
Object	+5V3A																																		
<p>1.Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>17</td><td>5.061</td><td>5.059</td></tr> <tr><td>18</td><td>5.061</td><td>5.059</td></tr> <tr><td>20</td><td>5.060</td><td>5.059</td></tr> <tr><td>24</td><td>5.060</td><td>5.059</td></tr> <tr><td>30</td><td>5.060</td><td>5.059</td></tr> <tr><td>36</td><td>5.060</td><td>5.060</td></tr> <tr><td>40</td><td>5.060</td><td>5.060</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	17	5.061	5.059	18	5.061	5.059	20	5.060	5.059	24	5.060	5.059	30	5.060	5.059	36	5.060	5.060	40	5.060	5.060	--	-	-	--	-	-
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
17	5.061	5.059																																	
18	5.061	5.059																																	
20	5.060	5.059																																	
24	5.060	5.059																																	
30	5.060	5.059																																	
36	5.060	5.060																																	
40	5.060	5.060																																	
--	-	-																																	
--	-	-																																	




<p>Model MGS152405</p> <p>Item Load Regulation</p> <p>Object +5V3A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																			
<p>1.Graph</p> <p>—△— Input Volt. 18V</p> <p>---□--- Input Volt. 24V</p> <p>-·-○-·- Input Volt. 36V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.062</td><td>5.061</td><td>5.061</td></tr> <tr><td>0.6</td><td>5.061</td><td>5.061</td><td>5.061</td></tr> <tr><td>1.2</td><td>5.061</td><td>5.061</td><td>5.061</td></tr> <tr><td>1.8</td><td>5.060</td><td>5.060</td><td>5.060</td></tr> <tr><td>2.4</td><td>5.060</td><td>5.060</td><td>5.060</td></tr> <tr><td>3.0</td><td>5.059</td><td>5.059</td><td>5.059</td></tr> <tr><td>3.3</td><td>5.059</td><td>5.059</td><td>5.059</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.0	5.062	5.061	5.061	0.6	5.061	5.061	5.061	1.2	5.061	5.061	5.061	1.8	5.060	5.060	5.060	2.4	5.060	5.060	5.060	3.0	5.059	5.059	5.059	3.3	5.059	5.059	5.059	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																				
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																		
0.0	5.062	5.061	5.061																																																		
0.6	5.061	5.061	5.061																																																		
1.2	5.061	5.061	5.061																																																		
1.8	5.060	5.060	5.060																																																		
2.4	5.060	5.060	5.060																																																		
3.0	5.059	5.059	5.059																																																		
3.3	5.059	5.059	5.059																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		




Model	MGS152405	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+5V3A		


Input Volt. 24 V
 Cycle 1000 ms

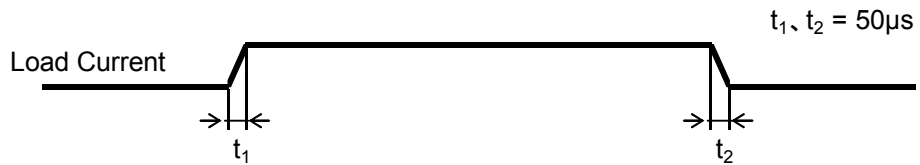

Min. Load (0A) ←→
 Load 100% (3A)

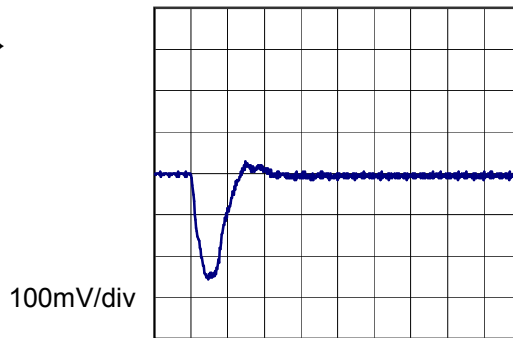


50µs/div

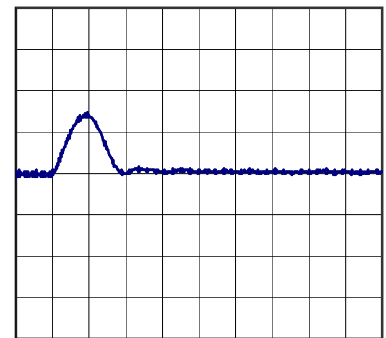


50µs/div

Min. Load (0A) ←→
 Load 50% (1.5A)

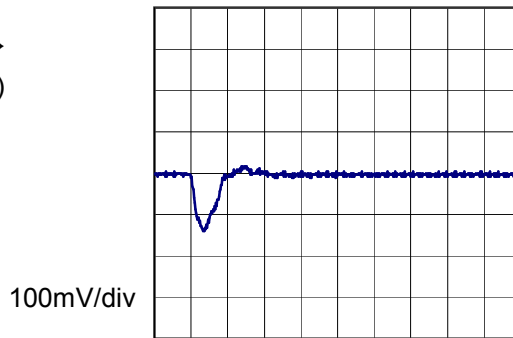


50µs/div

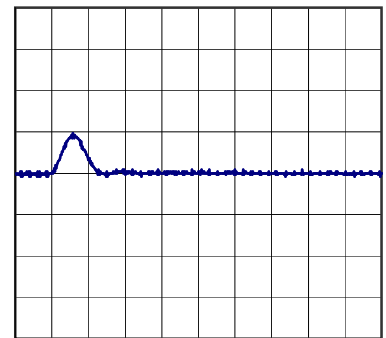


50µs/div

Load 50% (1.5A) ←→
 Load 100% (3A)

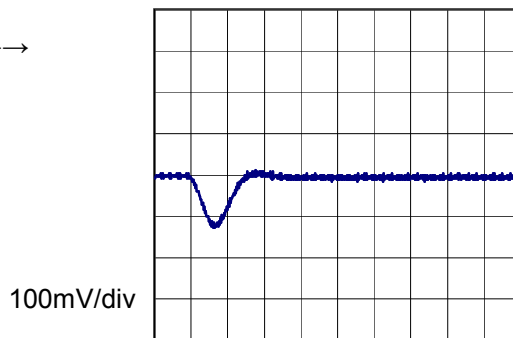


50µs/div

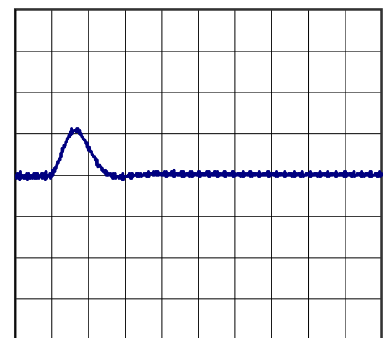

50µs/div

Model	MGS152405	Temperature	25°C
Item	Ripple Voltage (by Load Current)	Testing Circuitry	Figure B
Object	+5V3A		

1. Graph

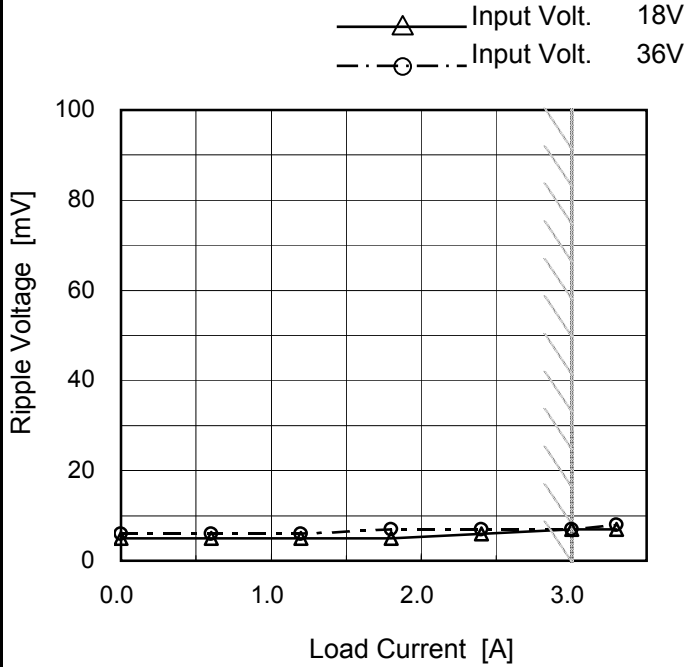

2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.0	5	6
0.6	5	6
1.2	5	6
1.8	5	7
2.4	6	7
3.0	7	7
3.3	7	8
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.
 Ripple Voltage is shown as p-p in the figure below.
 Note: Slanted line shows the range of the rated load current.

Ripple [mVp-p]

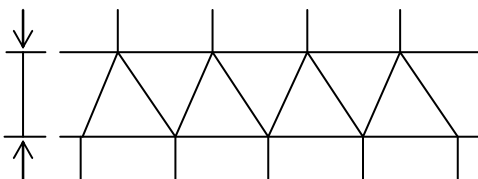



Fig. Complex Ripple Wave Form

<p>Model MGS152405</p>		<p>Temperature 25°C Testing Circuitry Figure B</p>																																						
Item	Ripple-Noise																																							
Object	+5V3A																																							
<p>1.Graph</p> <p> —△— Input Volt. 18V - -○- - Input Volt. 36V </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 18 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>7</td><td>8</td></tr> <tr><td>0.6</td><td>6</td><td>7</td></tr> <tr><td>1.2</td><td>6</td><td>7</td></tr> <tr><td>1.8</td><td>7</td><td>8</td></tr> <tr><td>2.4</td><td>8</td><td>8</td></tr> <tr><td>3.0</td><td>9</td><td>9</td></tr> <tr><td>3.3</td><td>9</td><td>9</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.0	7	8	0.6	6	7	1.2	6	7	1.8	7	8	2.4	8	8	3.0	9	9	3.3	9	9	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																							
	Input Volt. 18 [V]	Input Volt. 36 [V]																																						
0.0	7	8																																						
0.6	6	7																																						
1.2	6	7																																						
1.8	7	8																																						
2.4	8	8																																						
3.0	9	9																																						
3.3	9	9																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																								
<p>Ripple Noise[mVp-p]</p>																																								
<p>Fig.Complex Ripple Noise Wave Form</p>																																								

Model	MGS152405
Item	Ripple Voltage (by Ambient Temp.)
Object	+5V3A

Testing Circuitry Figure B

1. Graph

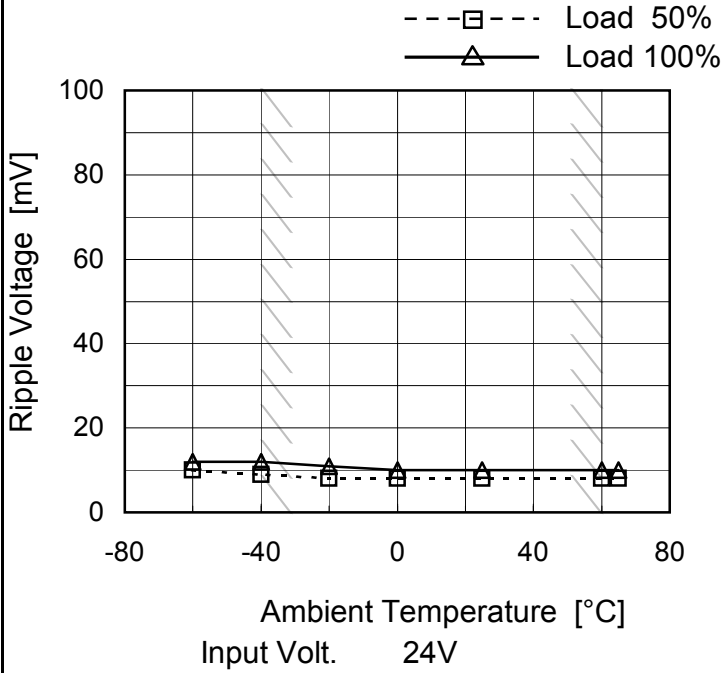

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	10	12
-40	9	12
-20	8	11
0	8	10
25	8	10
60	8	10
65	8	10
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.
Note: Slanted line shows the range of the rated ambient temperature.



COSEL																																																					
Model	MGS152405																																																				
Item	Ambient Temperature Drift	Testing Circuitry Figure A																																																			
Object	+5V3A																																																				
1.Graph	<p>—△— Input Volt. 18V ---□--- Input Volt. 24V -·-○-·- Input Volt. 36V</p> <p style="text-align: center;">Ambient Temperature [°C] Load 100%</p>	2.Values																																																			
		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>-60</td><td>5.021</td><td>5.021</td><td>5.022</td></tr> <tr><td>-40</td><td>5.034</td><td>5.034</td><td>5.035</td></tr> <tr><td>-20</td><td>5.044</td><td>5.044</td><td>5.045</td></tr> <tr><td>0</td><td>5.052</td><td>5.052</td><td>5.053</td></tr> <tr><td>25</td><td>5.059</td><td>5.059</td><td>5.059</td></tr> <tr><td>60</td><td>5.063</td><td>5.063</td><td>5.063</td></tr> <tr><td>65</td><td>5.063</td><td>5.063</td><td>5.063</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-60	5.021	5.021	5.022	-40	5.034	5.034	5.035	-20	5.044	5.044	5.045	0	5.052	5.052	5.053	25	5.059	5.059	5.059	60	5.063	5.063	5.063	65	5.063	5.063	5.063	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																				
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																		
-60	5.021	5.021	5.022																																																		
-40	5.034	5.034	5.035																																																		
-20	5.044	5.044	5.045																																																		
0	5.052	5.052	5.053																																																		
25	5.059	5.059	5.059																																																		
60	5.063	5.063	5.063																																																		
65	5.063	5.063	5.063																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																					



COSEL		
Model	MGS152405	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+5V3A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 60°C

Input Voltage : 18 - 36V

Load Current : 0 - 3A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	60	18	0	5.065	±16	±0.3
Minimum Voltage	-40	18	3	5.034		




COSEL																								
Model	MGS152405																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+5V3A																							
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 24V Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.057</td></tr> <tr><td>0.5</td><td>5.060</td></tr> <tr><td>1.0</td><td>5.060</td></tr> <tr><td>2.0</td><td>5.060</td></tr> <tr><td>3.0</td><td>5.060</td></tr> <tr><td>4.0</td><td>5.060</td></tr> <tr><td>5.0</td><td>5.060</td></tr> <tr><td>6.0</td><td>5.060</td></tr> <tr><td>7.0</td><td>5.060</td></tr> <tr><td>8.0</td><td>5.060</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	5.057	0.5	5.060	1.0	5.060	2.0	5.060	3.0	5.060	4.0	5.060	5.0	5.060	6.0	5.060	7.0	5.060	8.0	5.060
Time since start [H]	Output Voltage [V]																							
0.0	5.057																							
0.5	5.060																							
1.0	5.060																							
2.0	5.060																							
3.0	5.060																							
4.0	5.060																							
5.0	5.060																							
6.0	5.060																							
7.0	5.060																							
8.0	5.060																							



Model		MGS152405	Temperature	25°C
Item		Rise and Fall Time	Testing Circuitry	Figure A
Object		+5V3A		


1. Graph

Input Volt. 24 V

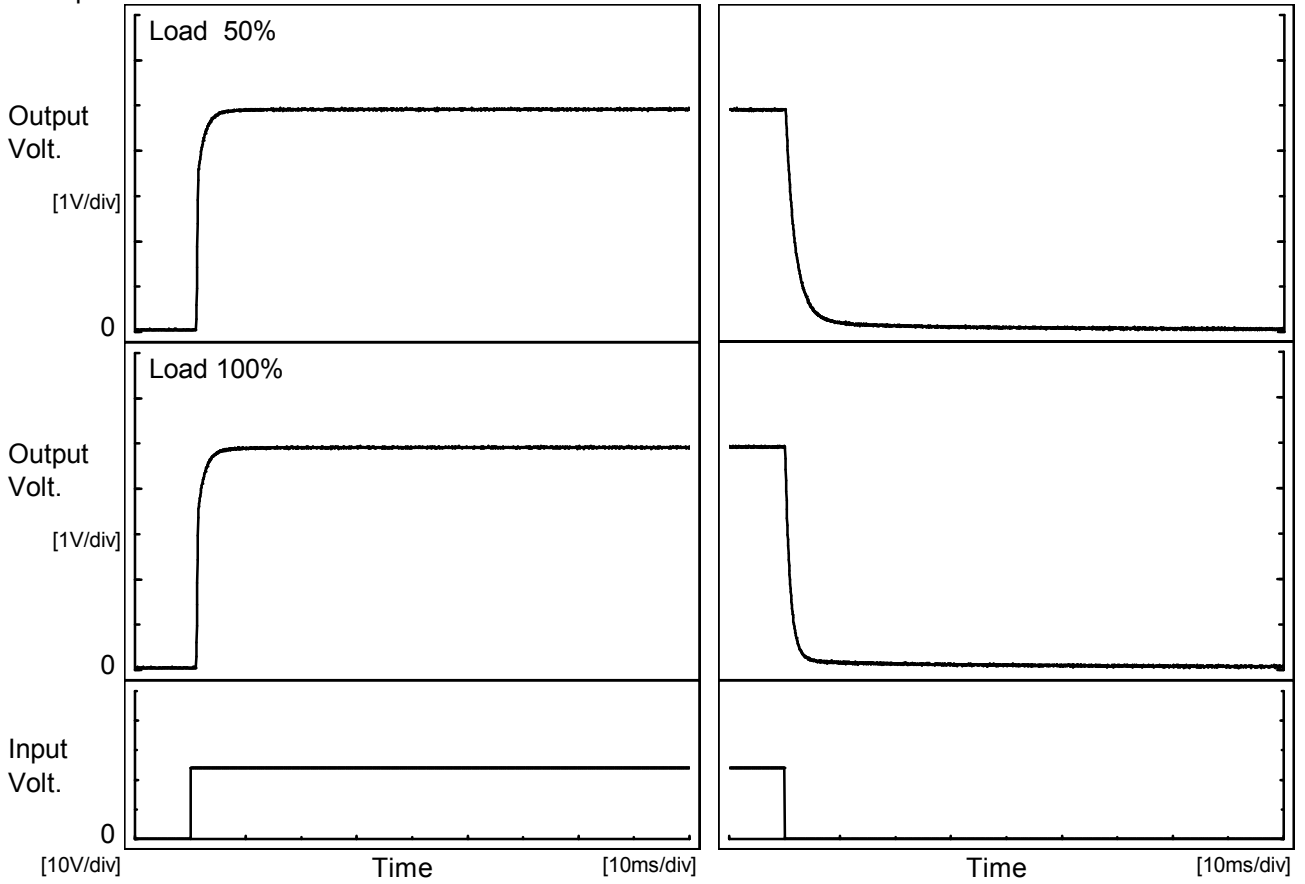

2. Values

		[ms]				
Load	Time	Td	Tr	Ts	Th	Tf
50 %		1.1	2.0	3.1	0.2	4.6
100 %		1.1	2.1	3.2	0.2	2.4

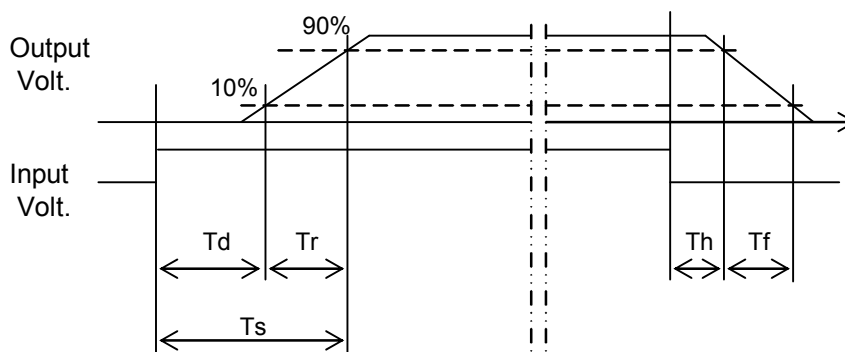



COSEL																																								
Model	MGS152405																																							
Item	Minimum Input Voltage for Regulated Output Voltage	Testing Circuitry Figure A																																						
Object	+5V3A																																							
<p>1.Graph</p> <p style="text-align: center;"> ---□--- Load 50% —△— Load 100% </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>15.7</td><td>15.7</td></tr> <tr><td>-40</td><td>15.7</td><td>15.7</td></tr> <tr><td>-20</td><td>15.7</td><td>15.7</td></tr> <tr><td>0</td><td>15.7</td><td>15.8</td></tr> <tr><td>25</td><td>15.7</td><td>15.7</td></tr> <tr><td>60</td><td>15.7</td><td>15.8</td></tr> <tr><td>65</td><td>15.7</td><td>15.8</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-60	15.7	15.7	-40	15.7	15.7	-20	15.7	15.7	0	15.7	15.8	25	15.7	15.7	60	15.7	15.8	65	15.7	15.8	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-60	15.7	15.7																																						
-40	15.7	15.7																																						
-20	15.7	15.7																																						
0	15.7	15.8																																						
25	15.7	15.7																																						
60	15.7	15.8																																						
65	15.7	15.8																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



<p>Model MGS152405</p> <p>Item Overcurrent Protection</p> <p>Object +5V3A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																							
<p>1.Graph</p> <p> —△ Input Volt. 18V —□ Input Volt. 24V —○ Input Volt. 36V </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>Intermittent operation occurs when overcurrent protection is activated.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>5.00</td><td>3.76</td><td>4.02</td><td>3.81</td></tr> <tr><td>4.75</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>4.50</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>4.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>3.50</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>3.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>2.50</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>2.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.50</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.50</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	5.00	3.76	4.02	3.81	4.75	-	-	-	4.50	-	-	-	4.00	-	-	-	3.50	-	-	-	3.00	-	-	-	2.50	-	-	-	2.00	-	-	-	1.50	-	-	-	1.00	-	-	-	0.50	-	-	-	0.00	-	-	-
Output Voltage [V]	Load Current [A]																																																								
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																						
5.00	3.76	4.02	3.81																																																						
4.75	-	-	-																																																						
4.50	-	-	-																																																						
4.00	-	-	-																																																						
3.50	-	-	-																																																						
3.00	-	-	-																																																						
2.50	-	-	-																																																						
2.00	-	-	-																																																						
1.50	-	-	-																																																						
1.00	-	-	-																																																						
0.50	-	-	-																																																						
0.00	-	-	-																																																						

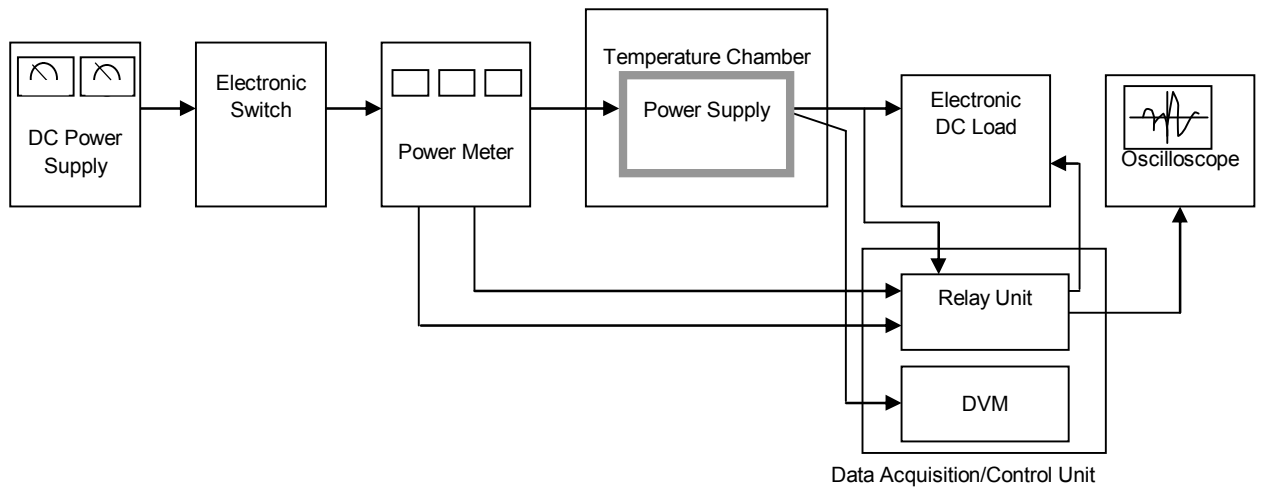


Figure A

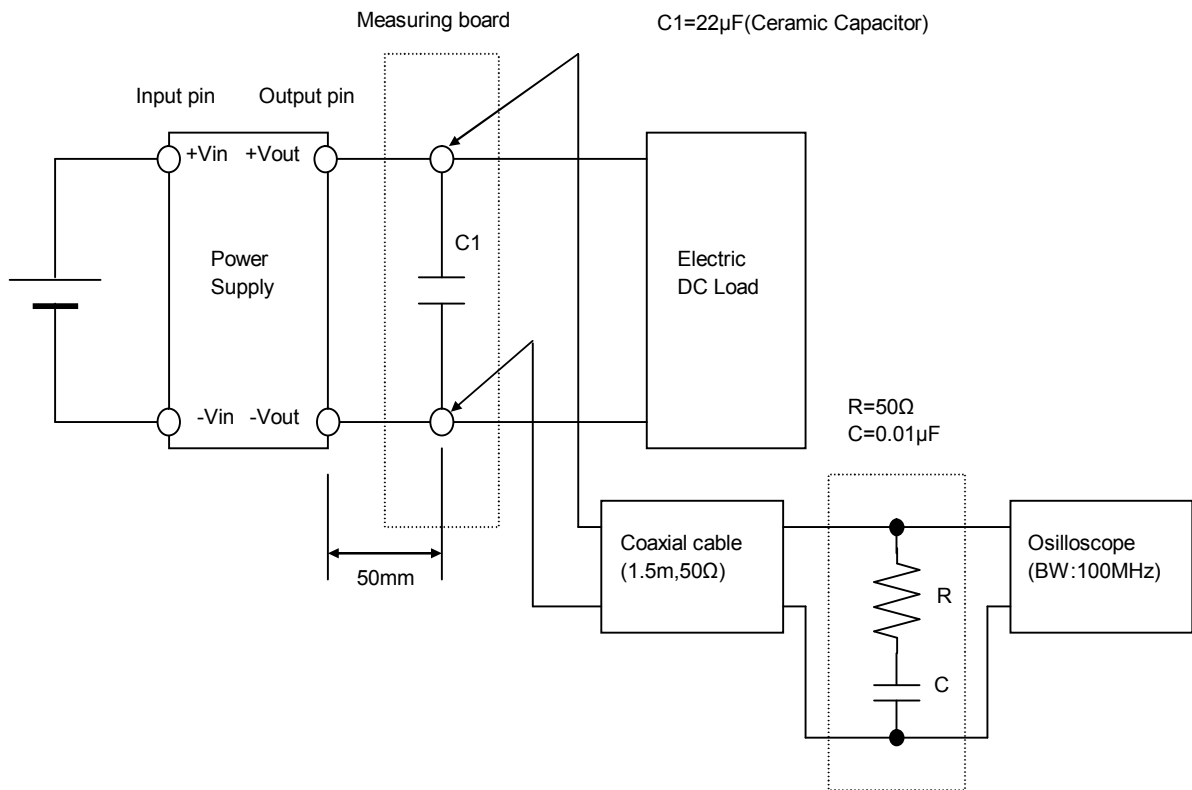


Figure B (Ripple and Ripple noise Characteristic)