

Date : Apr.12,1999

Temperature increase of main components: 主要部品温度上昇

Model : MMC 8 A

1. Conditions

- (1) Input : AC 85 ~ 132 [V]
- (2) Output : Rated output
- (3) Mounting method : Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)					Rated temp. [°C]	Reference
			[deg]						
			-1	-2	-3				
1	Line filter	L1	49	46	44			120	
2	Rectifier(Input)	SS1	38	37	35			150	Junction temp.
3	Input capacitor	C3	15	13	14			105	
4	Switching transistor	TR2	50	48	48			150	Junction temp.
5	Transformer	T1	34	33	31			120	
6	Rectified diode(Output)	D5	48	42	47			150	Junction temp.
7	Smooth reactor(Output)	L2	41	38	41			120	
8	Voltage regulator	IC2	55	50	49			150	Junction temp.
9	Voltage regulator	IC3	53	46	42			150	Junction temp.
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									

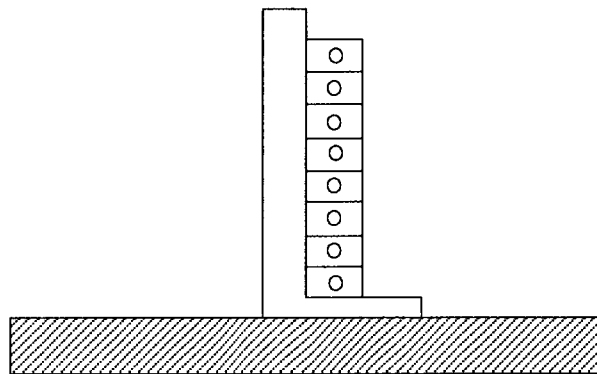


Fig.1.1 Mounting method
(Normal position)