

TEST DATA OF NAC-10-□□□**Noise Filter**

Apr. 22. 2005

Approved by : Toshio Watanabe
Toshio Watanabe Design Manager

Prepared by : Tadayuki Noda
Tadayuki Noda Design Engineer

COSEL CO.,LTD.



CONTENTS

1. Attenuation Characteristics 1
2. Pulse Attenuation Characteristics 4
3. Leakage Current 6
4. Figure of Testing Circuitry 7

(Final Page 8)





Model	NAC-10-□□□	
Item	Attenuation Characteristics	Temperature 25°C Testing Circuitry Figure A
Object	_____	

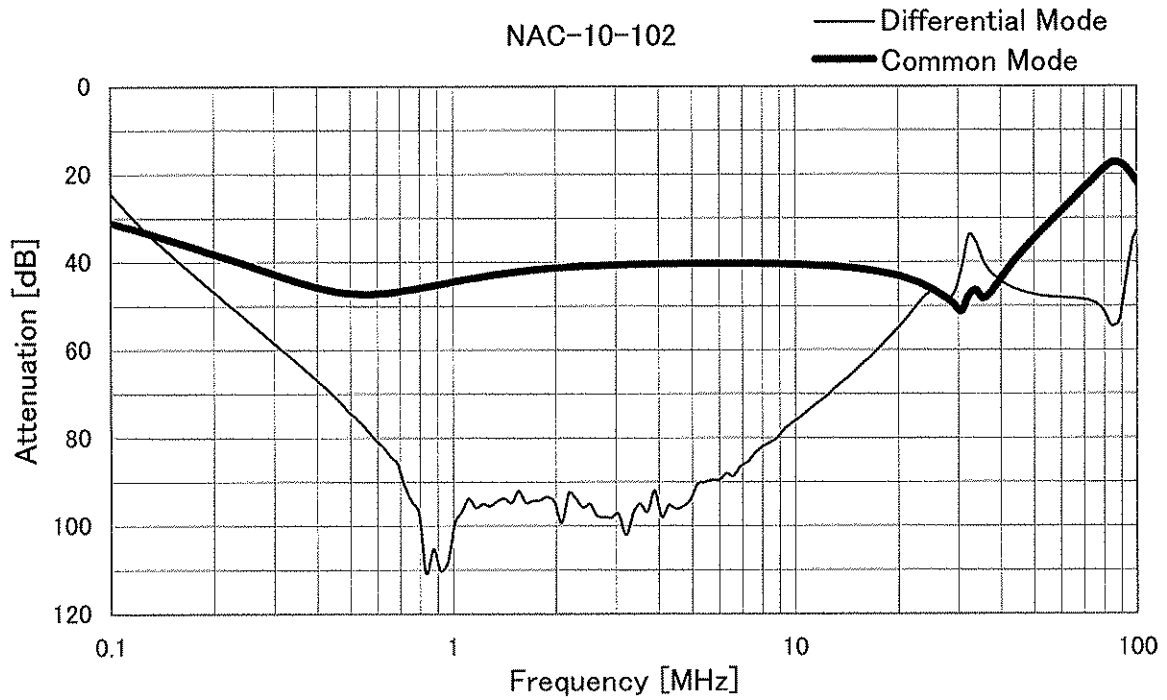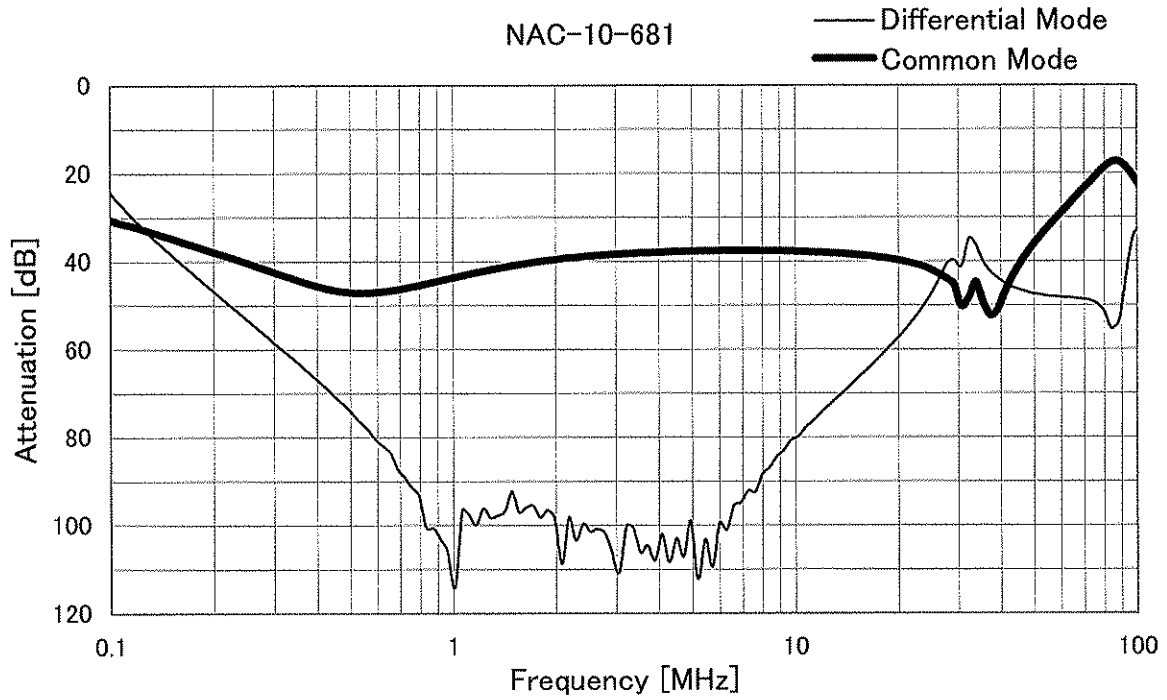




Model		NAC-10-□□□	Temperature 25°C Testing Circuitry Figure A
Item		Attenuation Characteristics	
Object		_____	

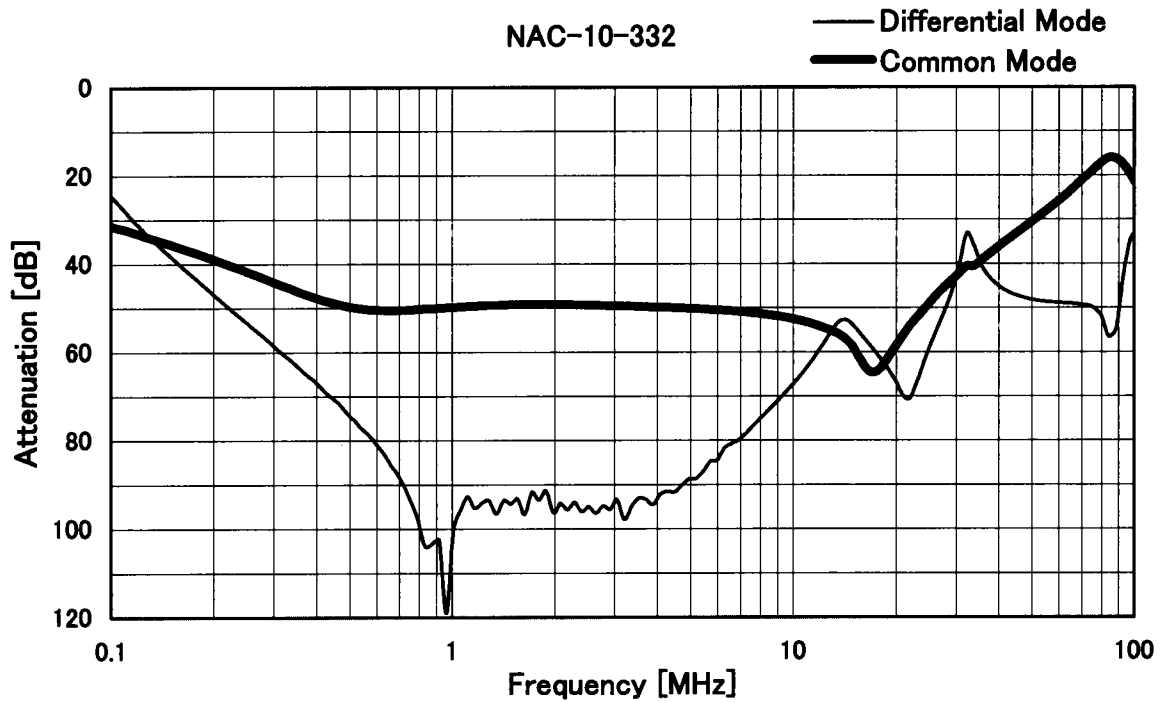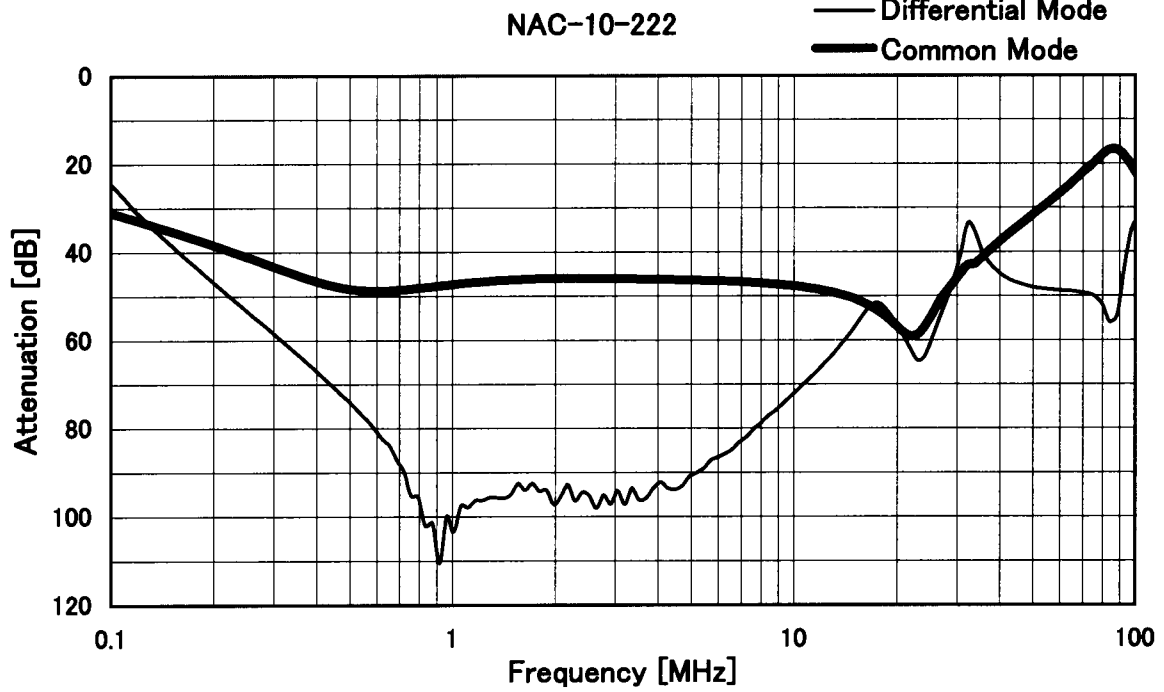







COSEL		
Model	NAC-10-□□□	Temperature 25°C Testing Circuitry Figure A
Item	Attenuation Characteristics	
Object	_____	

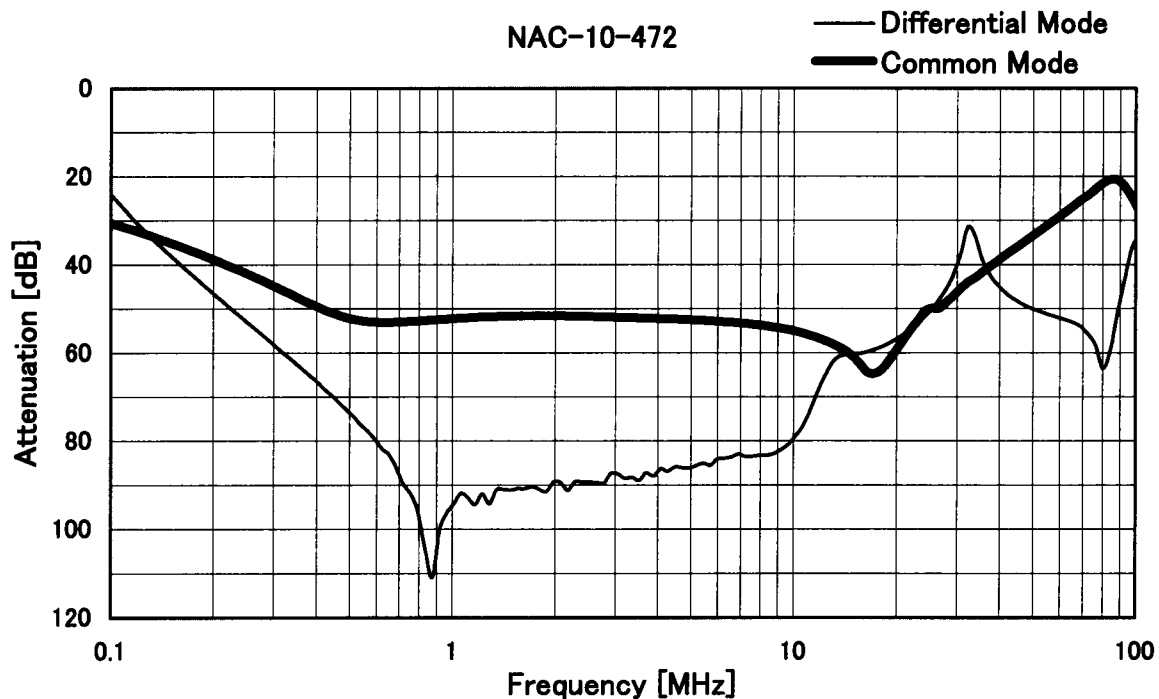




Model	NAC-10-□□□	Temperature 25°C Testing Circuitry Figure B
Item	Pulse Attenuation Characteristics	
Object	_____	

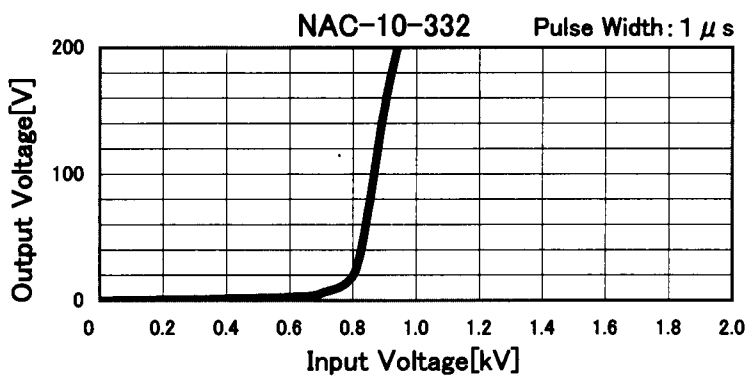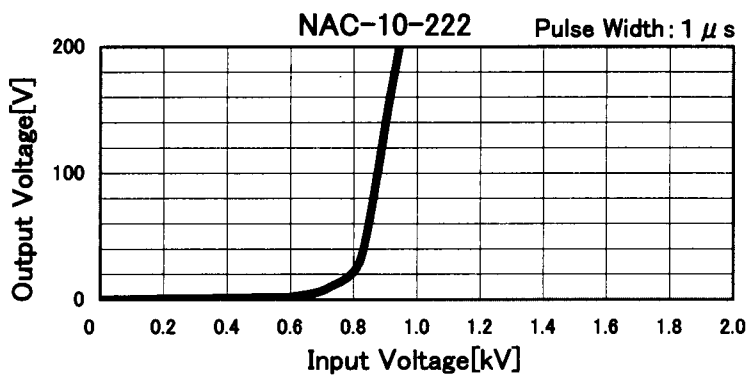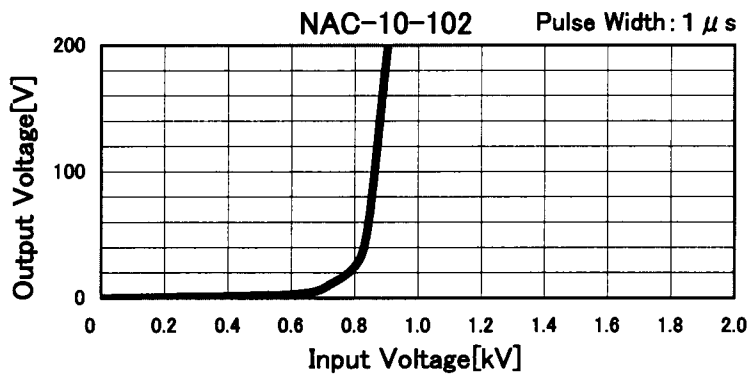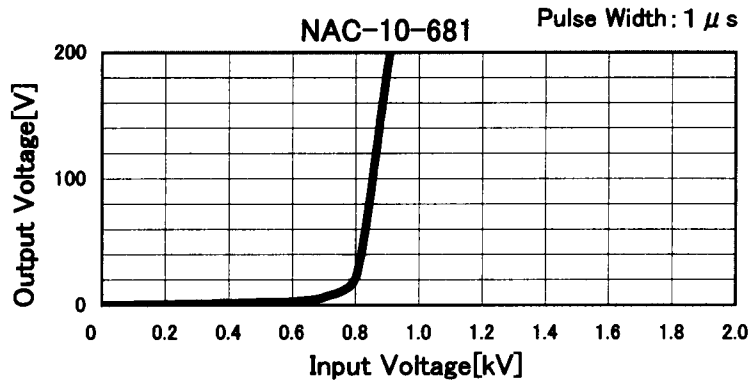



COSEL		
Model	NAC-10-□□□	Temperature 25°C Testing Circuitry Figure B
Item	Pulse Attenuation Characteristics	
Object	_____	

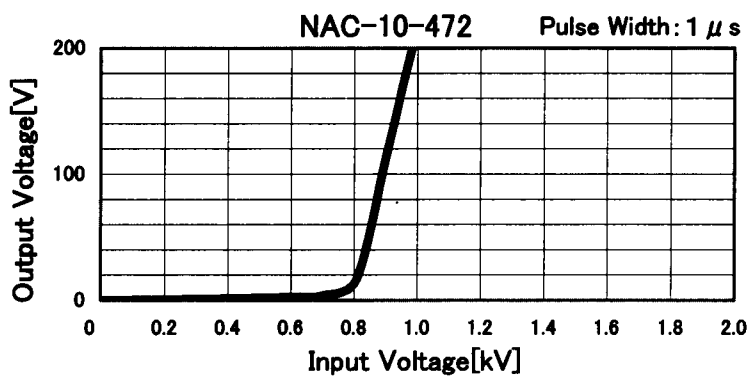



COSEL		Temperature 25°C Testing Circuitry Figure C
Model	NAC-10-□□□	
Item	Leakage Current	
Object	_____	

1.Results

[mA]

Model	Standards	Input Volt.				Note
		100 [V]	125 [V]	230 [V]	250 [V]	
NAC-10-681	UL1283	0.031	0.040	0.082	0.093	
NAC-10-102	UL1283	0.044	0.056	0.110	0.120	
NAC-10-222	UL1283	0.090	0.120	0.230	0.250	
NAC-10-332	UL1283	0.130	0.170	0.340	0.370	
NAC-10-472	UL1283	0.190	0.240	0.480	0.520	

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

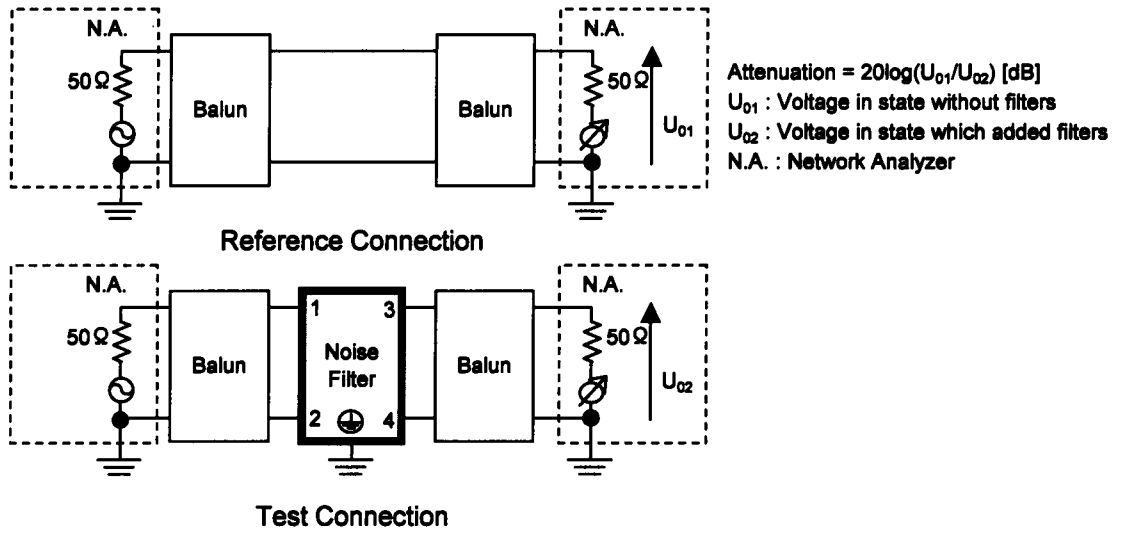


Figure A - 1 Differential mode attenuation measurement


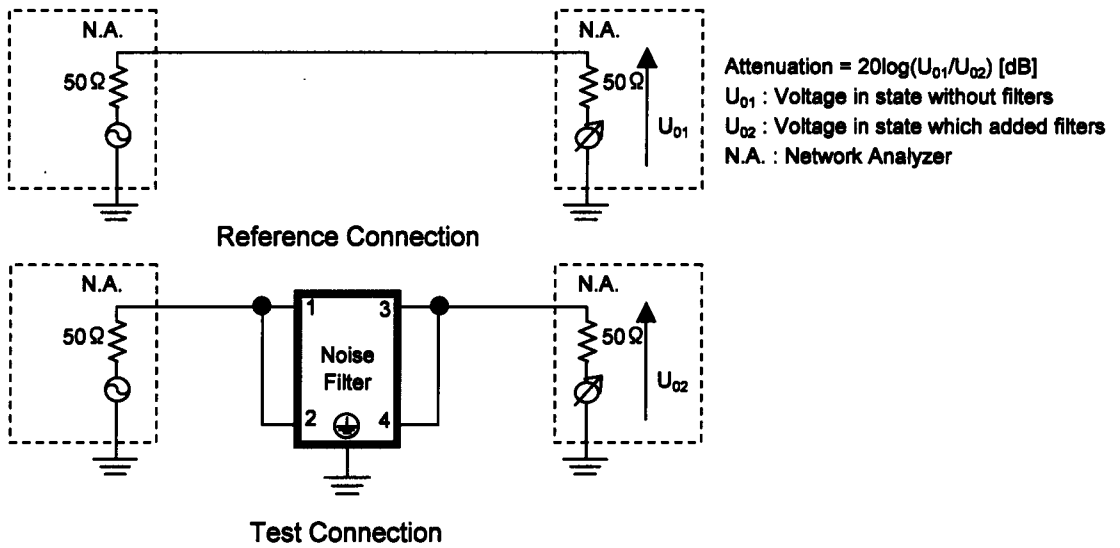


Figure A - 2 Common mode attenuation measurement

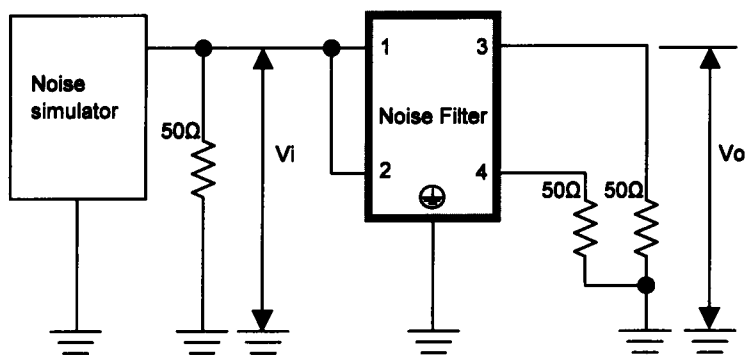

Pulse attenuation measurement

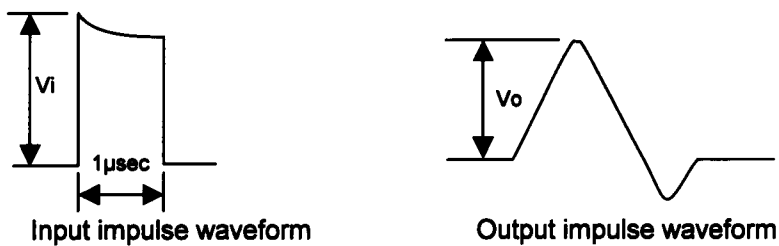


Figure B Pulse attenuation measurement

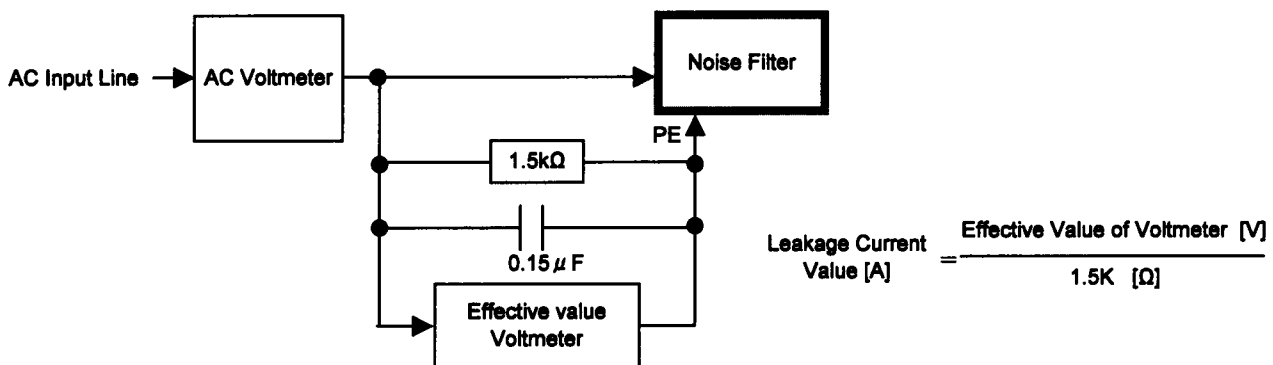


Figure C Leakage current measurement (UL1283)