



TEST DATA OF PAA75F-5 (100V INPUT)

Regulated DC Power Supply

Date : Feb. 17. 1997

Approved by : *M. Tamihawa*
Design Manager

Prepared by : *T. Anei*
Design Engineer

コーセル株式会社

COSEL CO.,LTD.

C O N T E N T S

1.	Line Regulation	1
	静的入力変動	
2.	Efficiency	2
	効率	
3.	Power Factor	3
	力率	
4.	Hold-Up Time	4
	出力保持時間	
5.	Instantaneous Interruption Compensation	5
	瞬時停電保障	
6.	Load Regulation	6
	静的負荷変動	
7.	Ripple Voltage (by Load Current)	7
	リップル電圧(負荷電流特性)	
8.	Ripple-Noise	8
	リップルノイズ	
9.	Overcurrent Protection	9
	過電流保護	
10.	Overvoltage Protection	10
	過電圧保護	
11.	Inrush Current	11
	突入電流	
12.	Dynamic Load Responce	12
	動的負荷変動	
13.	Rise and Fall Time	13
	立上り、立下がり時間	
14.	Ambient Temperature Drift	14
	周囲温度変動	
15.	Minimum Input Voltage for Regulated Output Voltage	15
	最低レギュレーション電圧	
16.	Ripple Voltage (by Ambient Temperature)	16
	リップル電圧(周囲温度特性)	
17.	Time Lapse Drift	17
	経時ドリフト	
18.	Output Voltage Accuracy	18
	定電圧精度	
19.	Harmonic Current	19
	高調波電流	
20.	Condensation	21
	結露特性	
21.	Leakage Current	22
	漏洩電流	
22.	Line Noise Tolerance	23
	入力雑音耐量	
23.	Conducted Emission	24
	雑音端子電圧	
24.	Figure of Testing Circuitry	25
	測定回路図	

(Final Page 26)



Model		PAA75F-5		Temperature		25°C																																	
Item		Line Regulation 静的入力変動		Testing Circuitry		Figure A																																	
Object		+5V15.0A																																					
1. Graph				2. Values																																			
<p>-----□----- Load 50%</p> <p>-----△----- Load 100%</p> <p>Output Voltage [V]</p> <p>Input Voltage [V]</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>				<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>75</td><td>5.077</td><td>5.063</td></tr> <tr><td>80</td><td>5.076</td><td>5.063</td></tr> <tr><td>85</td><td>5.077</td><td>5.063</td></tr> <tr><td>90</td><td>5.076</td><td>5.063</td></tr> <tr><td>100</td><td>5.076</td><td>5.063</td></tr> <tr><td>110</td><td>5.077</td><td>5.063</td></tr> <tr><td>120</td><td>5.076</td><td>5.063</td></tr> <tr><td>132</td><td>5.077</td><td>5.063</td></tr> <tr><td>140</td><td>5.076</td><td>5.063</td></tr> </tbody> </table>				Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	75	5.077	5.063	80	5.076	5.063	85	5.077	5.063	90	5.076	5.063	100	5.076	5.063	110	5.077	5.063	120	5.076	5.063	132	5.077	5.063	140	5.076	5.063
Input Voltage [V]	Load 50%	Load 100%																																					
	Output Volt. [V]	Output Volt. [V]																																					
75	5.077	5.063																																					
80	5.076	5.063																																					
85	5.077	5.063																																					
90	5.076	5.063																																					
100	5.076	5.063																																					
110	5.077	5.063																																					
120	5.076	5.063																																					
132	5.077	5.063																																					
140	5.076	5.063																																					




Model		PAA75F-5		Temperature		25°C																																	
Item		Efficiency 効率		Testing Circuitry		Figure A																																	
Object		+5V15.0A																																					
1. Graph				2. Values																																			
<p>-----□----- Load 50%</p> <p>-----△----- Load 100%</p> <p>Efficiency [%]</p> <p>Input Voltage [V]</p>				<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Efficiency [%]</th> <th>Efficiency [%]</th> </tr> </thead> <tbody> <tr><td>75</td><td>75.7</td><td>71.5</td></tr> <tr><td>80</td><td>75.8</td><td>72.1</td></tr> <tr><td>85</td><td>76.0</td><td>72.5</td></tr> <tr><td>90</td><td>76.1</td><td>73.0</td></tr> <tr><td>100</td><td>76.0</td><td>73.6</td></tr> <tr><td>110</td><td>76.0</td><td>74.0</td></tr> <tr><td>120</td><td>75.6</td><td>74.3</td></tr> <tr><td>132</td><td>75.3</td><td>74.5</td></tr> <tr><td>140</td><td>75.1</td><td>74.6</td></tr> </tbody> </table>				Input Voltage [V]	Load 50%	Load 100%	Efficiency [%]	Efficiency [%]	75	75.7	71.5	80	75.8	72.1	85	76.0	72.5	90	76.1	73.0	100	76.0	73.6	110	76.0	74.0	120	75.6	74.3	132	75.3	74.5	140	75.1	74.6
Input Voltage [V]	Load 50%	Load 100%																																					
	Efficiency [%]	Efficiency [%]																																					
75	75.7	71.5																																					
80	75.8	72.1																																					
85	76.0	72.5																																					
90	76.1	73.0																																					
100	76.0	73.6																																					
110	76.0	74.0																																					
120	75.6	74.3																																					
132	75.3	74.5																																					
140	75.1	74.6																																					
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																							



Model	PAA75F-5
Item	Power Factor 力率
Object	+5V15.0A

Temperature 25°C
Testing Circuitry Figure A

1. Graph
 -----□----- load 50%
 -----△----- load 100%

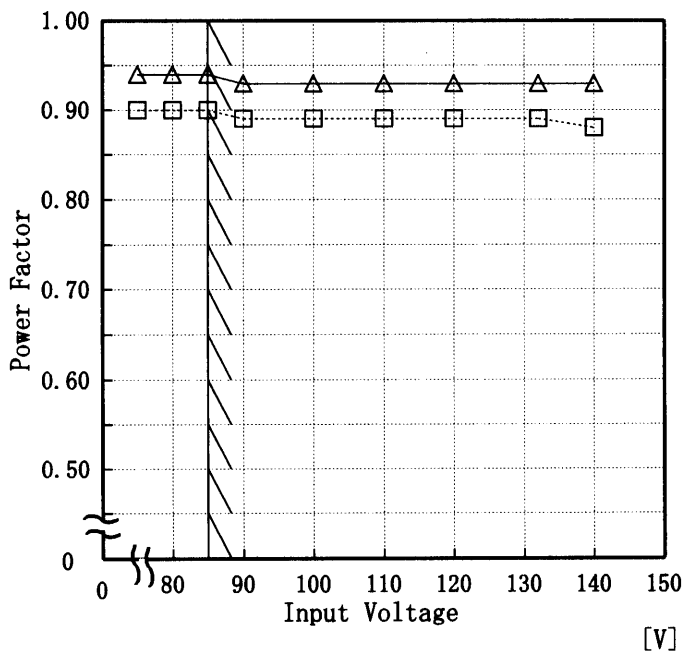

2. Values

Input Voltage [V]	load 50%	load 100%
	Power Factor	Power Factor
75	0.90	0.94
80	0.90	0.94
85	0.90	0.94
90	0.89	0.93
100	0.89	0.93
110	0.89	0.93
120	0.89	0.93
132	0.89	0.93
140	0.88	0.93

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。



Model		PAA75F-5		Temperature		25°C																																	
Item		Hold-Up Time 出力保持時間		Testing Circuitry		Figure A																																	
Object		+5V15.0A																																					
1. Graph				2. Values																																			
<p>Legend: —△— Load 50% - - -□- - - Load 100%</p>				<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Hold-Up Time [mS]</th> <th>Hold-Up Time [mS]</th> </tr> </thead> <tbody> <tr><td>75</td><td>31</td><td>8</td></tr> <tr><td>80</td><td>37</td><td>10</td></tr> <tr><td>85</td><td>43</td><td>13</td></tr> <tr><td>90</td><td>52</td><td>16</td></tr> <tr><td>100</td><td>66</td><td>22</td></tr> <tr><td>110</td><td>86</td><td>29</td></tr> <tr><td>120</td><td>105</td><td>36</td></tr> <tr><td>132</td><td>126</td><td>46</td></tr> <tr><td>140</td><td>145</td><td>52</td></tr> </tbody> </table>				Input Voltage [V]	Load 50%	Load 100%	Hold-Up Time [mS]	Hold-Up Time [mS]	75	31	8	80	37	10	85	43	13	90	52	16	100	66	22	110	86	29	120	105	36	132	126	46	140	145	52
Input Voltage [V]	Load 50%	Load 100%																																					
	Hold-Up Time [mS]	Hold-Up Time [mS]																																					
75	31	8																																					
80	37	10																																					
85	43	13																																					
90	52	16																																					
100	66	22																																					
110	86	29																																					
120	105	36																																					
132	126	46																																					
140	145	52																																					
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。 (注) 斜線は定格入力電圧範囲を示す。</p>																																							



<p>Model PAA75F-5</p>		<p>Temperature 25°C</p>																																																				
<p>Item Instantaneous Interruption Compensation 瞬時停電保障</p>		<p>Testing Circuitry Figure A</p>																																																				
<p>Object +5V15.0A</p>																																																						
<p>1. Graph</p> <p> △— Input Volt. 85V □--- Input Volt. 100V ○... Input Volt. 132V </p> <p> This duration counts between Shut-off and on of input voltage automatically. Note: Slanted line shows the range of the rated load current. </p> <p> 瞬時停電保障時間とは、出力電圧が定格値の95%になる時の瞬時停電時間をいう。 (注)斜線は定格負荷電流範囲を示す。 </p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> <tr> <th colspan="3">Time [mS]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>1.0</td><td>144</td><td>206</td><td>381</td></tr> <tr><td>2.0</td><td>102</td><td>157</td><td>236</td></tr> <tr><td>4.0</td><td>89</td><td>101</td><td>189</td></tr> <tr><td>6.0</td><td>72</td><td>88</td><td>133</td></tr> <tr><td>8.0</td><td>48</td><td>65</td><td>89</td></tr> <tr><td>10.0</td><td>35</td><td>47</td><td>78</td></tr> <tr><td>12.0</td><td>22</td><td>35</td><td>57</td></tr> <tr><td>14.0</td><td>16</td><td>28</td><td>48</td></tr> <tr><td>15.0</td><td>12</td><td>22</td><td>45</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	Time [mS]			0.0	—	—	—	1.0	144	206	381	2.0	102	157	236	4.0	89	101	189	6.0	72	88	133	8.0	48	65	89	10.0	35	47	78	12.0	22	35	57	14.0	16	28	48	15.0	12	22	45	—	—	—	—
Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																			
	Time [mS]																																																					
0.0	—	—	—																																																			
1.0	144	206	381																																																			
2.0	102	157	236																																																			
4.0	89	101	189																																																			
6.0	72	88	133																																																			
8.0	48	65	89																																																			
10.0	35	47	78																																																			
12.0	22	35	57																																																			
14.0	16	28	48																																																			
15.0	12	22	45																																																			
—	—	—	—																																																			



Model		PAA75F-5		Temperature		25°C																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+5V15.0A																																																				
1. Graph				2. Values																																																		
<p> △ Input Volt. 85V □ Input Volt. 100V ○ Input Volt. 132V </p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.090</td><td>5.090</td><td>5.090</td></tr> <tr><td>3.0</td><td>5.083</td><td>5.084</td><td>5.085</td></tr> <tr><td>6.0</td><td>5.079</td><td>5.079</td><td>5.079</td></tr> <tr><td>9.0</td><td>5.073</td><td>5.073</td><td>5.074</td></tr> <tr><td>12.0</td><td>5.069</td><td>5.069</td><td>5.069</td></tr> <tr><td>15.0</td><td>5.064</td><td>5.063</td><td>5.063</td></tr> <tr><td>16.5</td><td>5.061</td><td>5.061</td><td>5.061</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.0	5.090	5.090	5.090	3.0	5.083	5.084	5.085	6.0	5.079	5.079	5.079	9.0	5.073	5.073	5.074	12.0	5.069	5.069	5.069	15.0	5.064	5.063	5.063	16.5	5.061	5.061	5.061	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																			
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																			
0.0	5.090	5.090	5.090																																																			
3.0	5.083	5.084	5.085																																																			
6.0	5.079	5.079	5.079																																																			
9.0	5.073	5.073	5.074																																																			
12.0	5.069	5.069	5.069																																																			
15.0	5.064	5.063	5.063																																																			
16.5	5.061	5.061	5.061																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																						



<p>Model PAA75F-5</p> <p>Item Ripple Voltage (by Load Current) リップル電圧(負荷電流特性)</p> <p>Object +5V 15.0A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																						
<p>1. Graph</p> <p>[mV]</p> <p>-----□----- Input Volt. 85V</p> <p>-----△----- Input Volt. 132V</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 85 [V]</th> <th>Input Volt. 132 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>10</td><td>10</td></tr> <tr><td>1.0</td><td>20</td><td>20</td></tr> <tr><td>2.0</td><td>30</td><td>30</td></tr> <tr><td>4.0</td><td>30</td><td>30</td></tr> <tr><td>6.0</td><td>30</td><td>30</td></tr> <tr><td>8.0</td><td>30</td><td>30</td></tr> <tr><td>10.0</td><td>30</td><td>30</td></tr> <tr><td>12.0</td><td>30</td><td>30</td></tr> <tr><td>14.0</td><td>30</td><td>30</td></tr> <tr><td>15.0</td><td>30</td><td>30</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.0	10	10	1.0	20	20	2.0	30	30	4.0	30	30	6.0	30	30	8.0	30	30	10.0	30	30	12.0	30	30	14.0	30	30	15.0	30	30	—	—	—
Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																						
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																						
0.0	10	10																																						
1.0	20	20																																						
2.0	30	30																																						
4.0	30	30																																						
6.0	30	30																																						
8.0	30	30																																						
10.0	30	30																																						
12.0	30	30																																						
14.0	30	30																																						
15.0	30	30																																						
—	—	—																																						
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期 T2: Due to Switching スイッチング周期</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																								




<p>Model PAA75F-5</p> <p>Item Ripple-Noise リップルノイズ</p> <p>Object +5V 15.0A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																						
<p>1. Graph</p> <p>[mV]</p> <p>-----□----- Input Volt. 85V</p> <p>-----△----- Input Volt. 132V</p> <p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p-p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期 T2: Due to Switching スイッチング周期</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 85 [V]</th> <th>Input Volt. 132 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>10</td><td>10</td></tr> <tr><td>1.0</td><td>30</td><td>30</td></tr> <tr><td>2.0</td><td>30</td><td>30</td></tr> <tr><td>4.0</td><td>40</td><td>40</td></tr> <tr><td>6.0</td><td>50</td><td>50</td></tr> <tr><td>8.0</td><td>60</td><td>60</td></tr> <tr><td>10.0</td><td>60</td><td>60</td></tr> <tr><td>12.0</td><td>60</td><td>60</td></tr> <tr><td>14.0</td><td>70</td><td>70</td></tr> <tr><td>15.0</td><td>70</td><td>70</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.0	10	10	1.0	30	30	2.0	30	30	4.0	40	40	6.0	50	50	8.0	60	60	10.0	60	60	12.0	60	60	14.0	70	70	15.0	70	70	—	—	—
Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																						
	Ripple-Noise [mV]	Ripple-Noise [mV]																																						
0.0	10	10																																						
1.0	30	30																																						
2.0	30	30																																						
4.0	40	40																																						
6.0	50	50																																						
8.0	60	60																																						
10.0	60	60																																						
12.0	60	60																																						
14.0	70	70																																						
15.0	70	70																																						
—	—	—																																						



Model	PAA75F-5
Item	Overcurrent Protection 過電流保護
Object	+5V 15.0A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

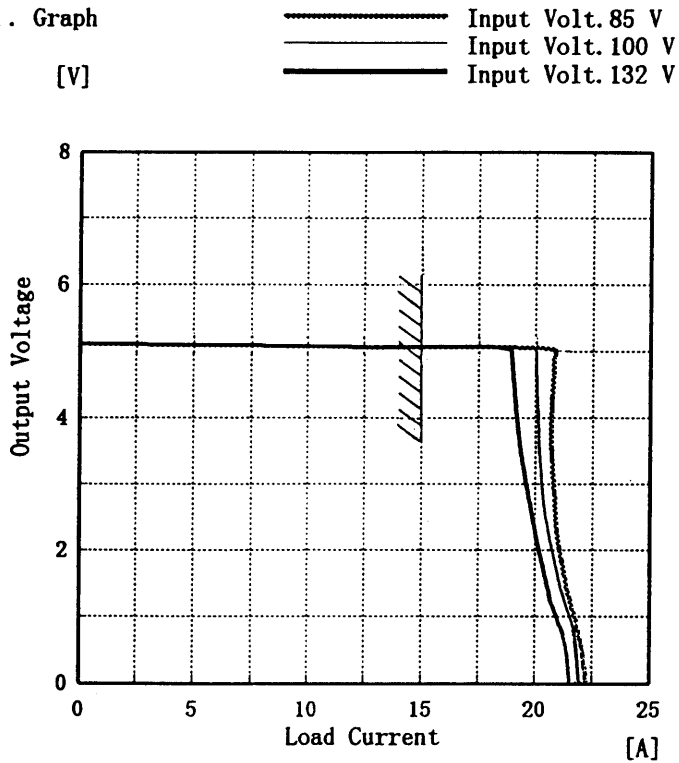

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

2. Values


Output Voltage [V]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Load Current [A]	Load Current [A]	Load Current [A]
5.00	20.80	20.00	18.95
4.75	20.79	20.03	19.00
4.50	20.77	20.05	19.07
4.00	20.69	20.11	19.19
3.50	20.70	20.17	19.37
3.00	20.80	20.28	19.62
2.50	20.89	20.47	19.91
2.00	21.07	20.75	20.21
1.50	21.35	21.07	20.52
1.00	21.76	21.53	20.99
0.50	21.86	21.65	21.14
0.00	21.92	21.76	21.26




COSEL																																																					
Model	PAA75F-5																																																				
Item	Overvoltage Protection 過電圧保護	Testing Circuitry Figure A																																																			
Object	+5V15.0A																																																				
1. Graph	<p> △— Input Volt. 85 V □--- Input Volt. 100 V ○---- Input Volt. 132 V </p>	2. Values																																																			
		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. [°C]</th> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> <tr> <th colspan="3">Operating Point [V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>6.37</td><td>6.38</td><td>6.38</td></tr> <tr><td>-10</td><td>6.39</td><td>6.39</td><td>6.39</td></tr> <tr><td>0</td><td>6.39</td><td>6.39</td><td>6.39</td></tr> <tr><td>10</td><td>6.39</td><td>6.40</td><td>6.40</td></tr> <tr><td>20</td><td>6.40</td><td>6.40</td><td>6.40</td></tr> <tr><td>25</td><td>6.42</td><td>6.42</td><td>6.42</td></tr> <tr><td>30</td><td>6.43</td><td>6.43</td><td>6.43</td></tr> <tr><td>40</td><td>6.44</td><td>6.44</td><td>6.44</td></tr> <tr><td>50</td><td>6.46</td><td>6.46</td><td>6.46</td></tr> <tr><td>60</td><td>6.46</td><td>6.46</td><td>6.46</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	Operating Point [V]			-20	6.37	6.38	6.38	-10	6.39	6.39	6.39	0	6.39	6.39	6.39	10	6.39	6.40	6.40	20	6.40	6.40	6.40	25	6.42	6.42	6.42	30	6.43	6.43	6.43	40	6.44	6.44	6.44	50	6.46	6.46	6.46	60	6.46	6.46	6.46	—	—	—	—
Ambient Temp. [°C]	Input Volt. 85[V]	Input Volt. 100[V]		Input Volt. 132[V]																																																	
	Operating Point [V]																																																				
-20	6.37	6.38	6.38																																																		
-10	6.39	6.39	6.39																																																		
0	6.39	6.39	6.39																																																		
10	6.39	6.40	6.40																																																		
20	6.40	6.40	6.40																																																		
25	6.42	6.42	6.42																																																		
30	6.43	6.43	6.43																																																		
40	6.44	6.44	6.44																																																		
50	6.46	6.46	6.46																																																		
60	6.46	6.46	6.46																																																		
—	—	—	—																																																		
	<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>																																																				



Model		PAA75F-5	Temperature 25°C Testing Circuitry Figure A
Item		Inrush Current 突入電流	
Object		+5V15.0A	

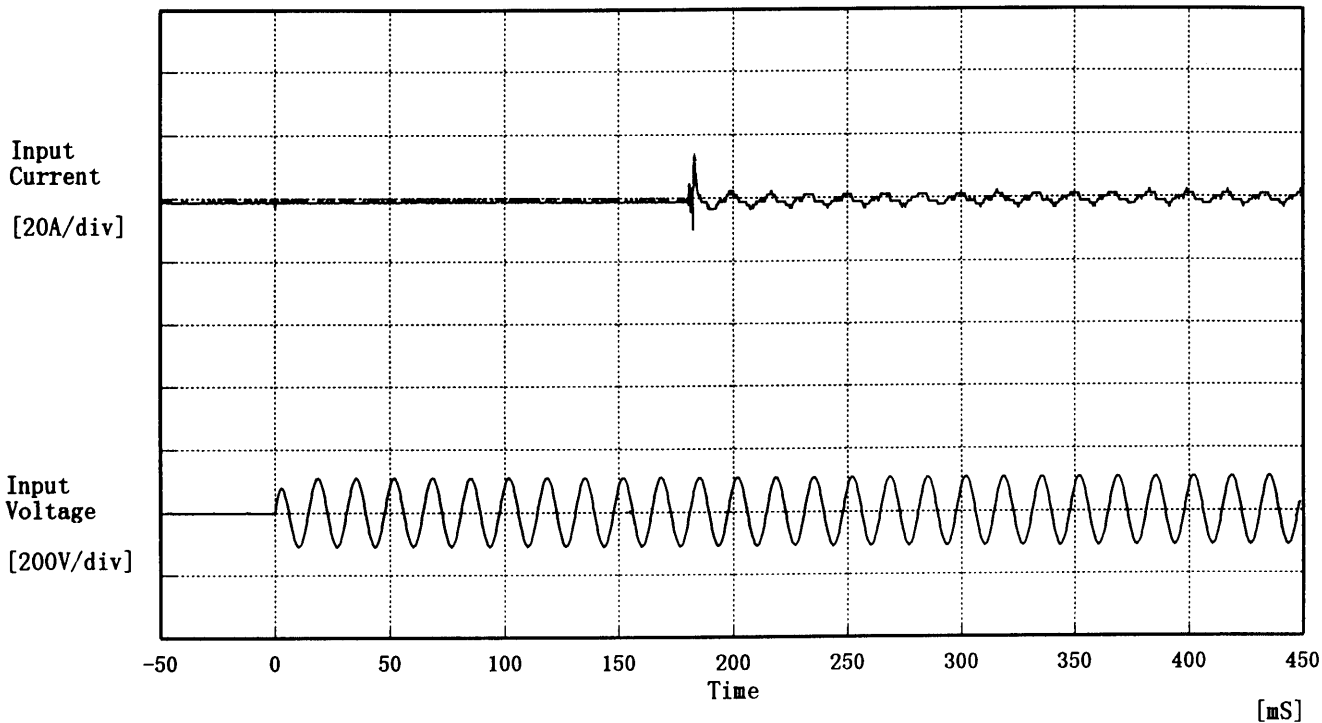

Input Voltage 100 V
 Frequency 60 Hz
 Load 100 %
 Inrush Current
 ① 3.36 [A]
 ② 17.01 [A]

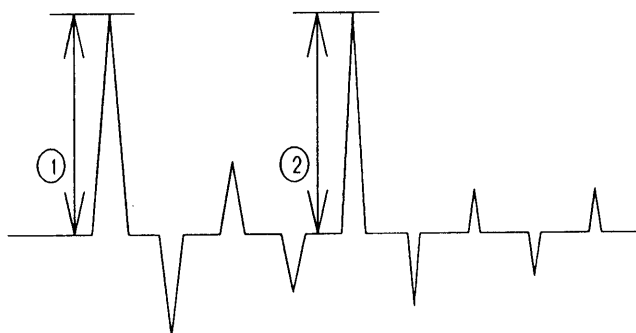



Model	PAA75F-5	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+5V15.0A		


Input Volt. 100 V

Cycle 200 mS

t 10 mS/div



Vo 100 mV/div

Load Current





Min. Load ↔

Load 100 %

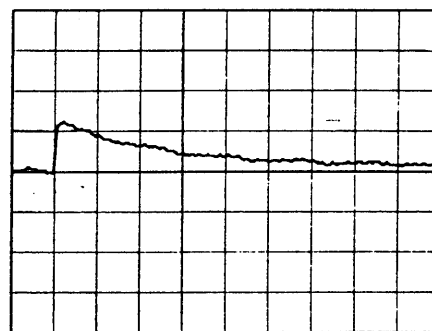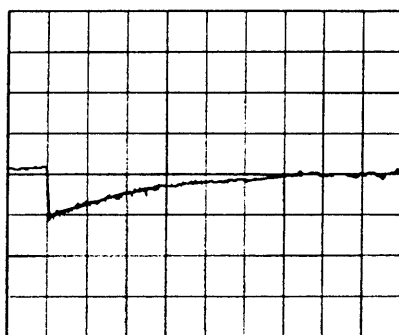

Min. Load ↔

Load 50 %

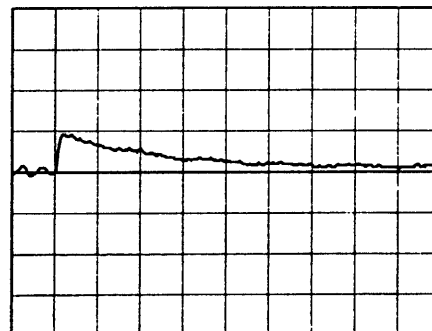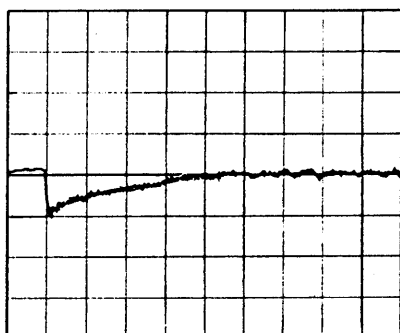




Model	PAA75F-5	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+5V15.0A		

1. Graph


Input Volt. 85 V

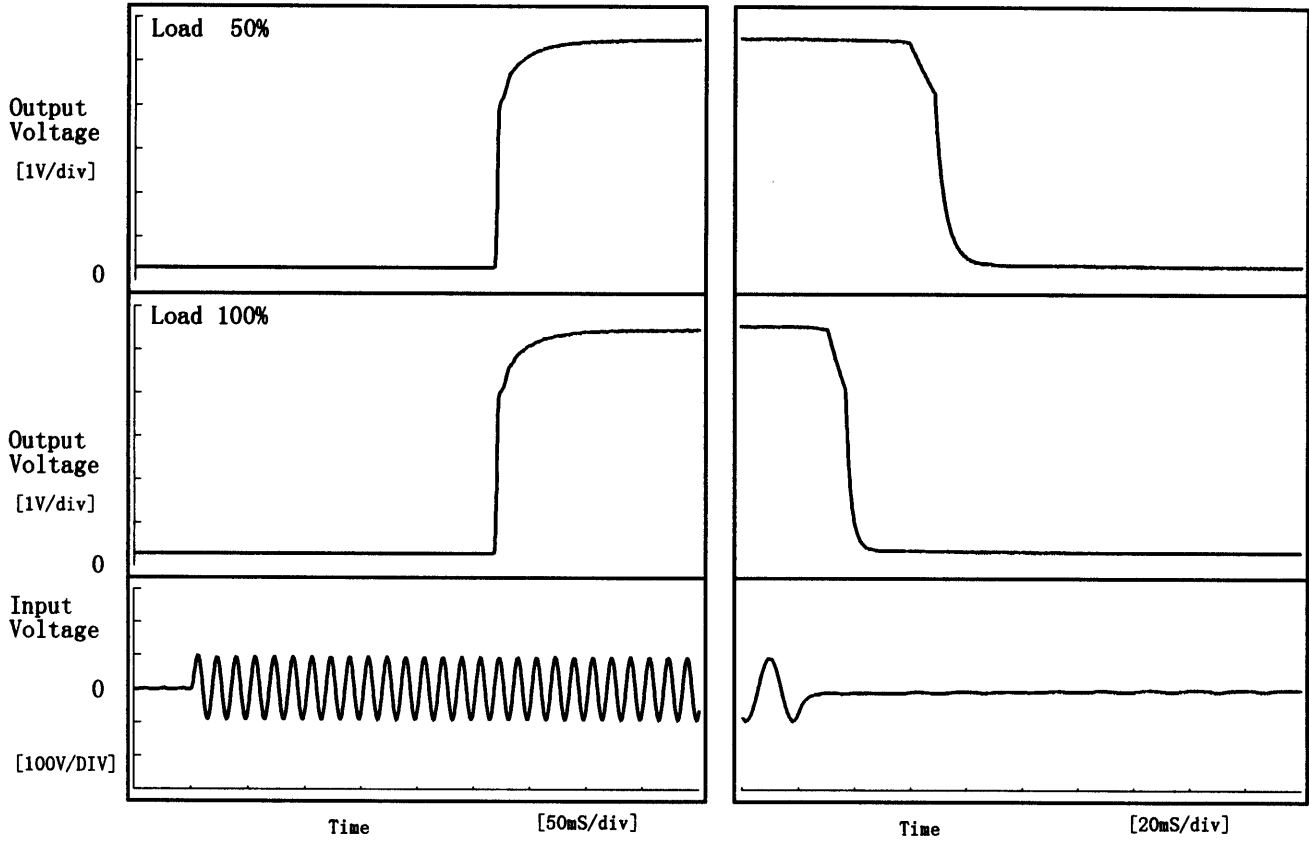

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	269.0	15.5	284.5	44.3	12.7
100 %	269.0	17.3	286.3	13.5	7.8

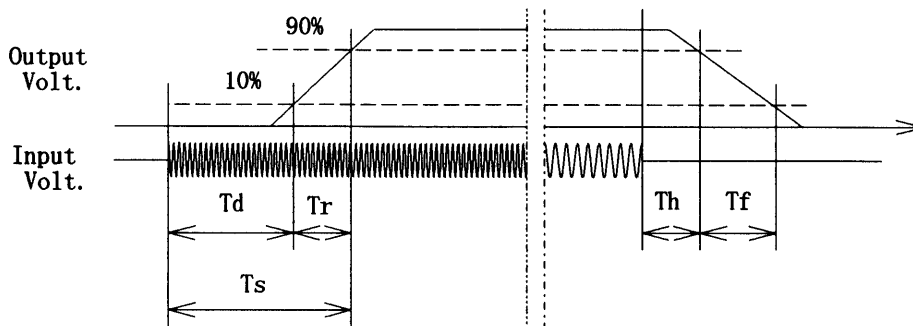



Model		PAA75F-5		Testing Circuitry Figure A																																																				
Item		Ambient Temperature Drift 周囲温度変動																																																						
Object		+5V15.0A																																																						
1. Graph		<p> —△— Input Volt. 85V - - -□- - - Input Volt. 100V - - -○- - - Input Volt. 132V </p>		2. Values																																																				
<p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>		<table border="1"> <thead> <tr> <th rowspan="2">Temperature [°C]</th> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>5.074</td><td>5.074</td><td>5.074</td></tr> <tr><td>-10</td><td>5.072</td><td>5.072</td><td>5.073</td></tr> <tr><td>0</td><td>5.070</td><td>5.070</td><td>5.070</td></tr> <tr><td>10</td><td>5.068</td><td>5.068</td><td>5.068</td></tr> <tr><td>20</td><td>5.065</td><td>5.065</td><td>5.065</td></tr> <tr><td>25</td><td>5.063</td><td>5.063</td><td>5.063</td></tr> <tr><td>30</td><td>5.062</td><td>5.062</td><td>5.062</td></tr> <tr><td>40</td><td>5.057</td><td>5.057</td><td>5.057</td></tr> <tr><td>50</td><td>5.055</td><td>5.055</td><td>5.055</td></tr> <tr><td>60</td><td>5.051</td><td>5.051</td><td>5.051</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Temperature [°C]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-20	5.074	5.074	5.074	-10	5.072	5.072	5.073	0	5.070	5.070	5.070	10	5.068	5.068	5.068	20	5.065	5.065	5.065	25	5.063	5.063	5.063	30	5.062	5.062	5.062	40	5.057	5.057	5.057	50	5.055	5.055	5.055	60	5.051	5.051	5.051	—	—	—	—		
Temperature [°C]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																					
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																					
-20	5.074	5.074	5.074																																																					
-10	5.072	5.072	5.073																																																					
0	5.070	5.070	5.070																																																					
10	5.068	5.068	5.068																																																					
20	5.065	5.065	5.065																																																					
25	5.063	5.063	5.063																																																					
30	5.062	5.062	5.062																																																					
40	5.057	5.057	5.057																																																					
50	5.055	5.055	5.055																																																					
60	5.051	5.051	5.051																																																					
—	—	—	—																																																					
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>																																																								




Model		PAA75F-5																																					
Item		Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧																																					
Object		+5V15.0A																																					
1. Graph		2. Values																																					
<p>-----□----- Load 50%</p> <p>-----△----- Load 100%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>		<table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th> <th>Load 50% Input Volt. [V]</th> <th>Load 100% Input Volt. [V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>43</td><td>51</td></tr> <tr><td>-10</td><td>43</td><td>51</td></tr> <tr><td>0</td><td>43</td><td>51</td></tr> <tr><td>10</td><td>43</td><td>51</td></tr> <tr><td>20</td><td>43</td><td>52</td></tr> <tr><td>25</td><td>43</td><td>52</td></tr> <tr><td>30</td><td>44</td><td>52</td></tr> <tr><td>40</td><td>44</td><td>53</td></tr> <tr><td>50</td><td>44</td><td>53</td></tr> <tr><td>60</td><td>44</td><td>54</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]	-20	43	51	-10	43	51	0	43	51	10	43	51	20	43	52	25	43	52	30	44	52	40	44	53	50	44	53	60	44	54	—	—	—
Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]																																					
-20	43	51																																					
-10	43	51																																					
0	43	51																																					
10	43	51																																					
20	43	52																																					
25	43	52																																					
30	44	52																																					
40	44	53																																					
50	44	53																																					
60	44	54																																					
—	—	—																																					



Model	PAA75F-5
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+5V15.0A

Testing Circuitry Figure A

1. Graph

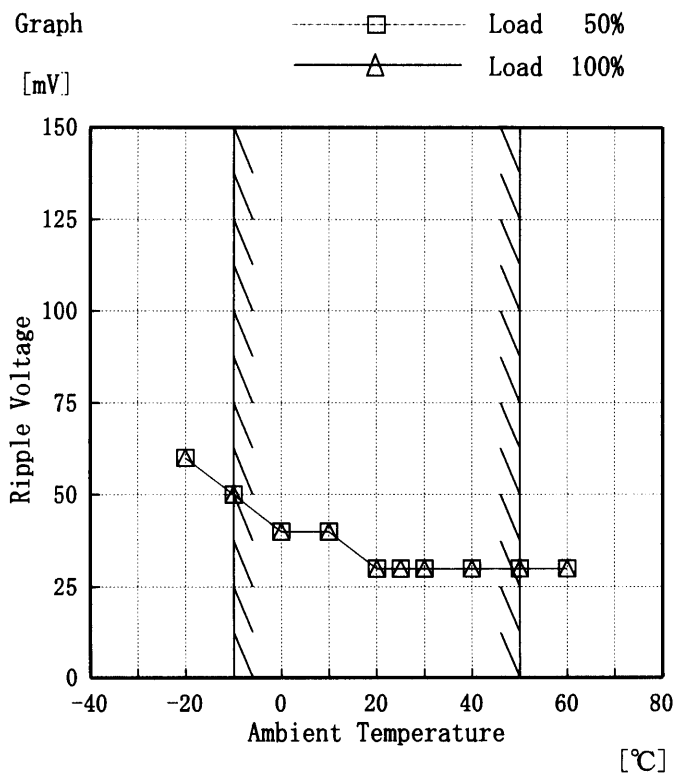

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-20	60	60
-10	50	50
0	40	40
10	40	40
20	30	30
25	30	30
30	30	30
40	30	30
50	30	30
60	30	30
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。



COSEL																								
Model	PAA75F-5																							
Item	Time Lapse Drift 経時ドリフト	Temperature 25 °C Testing Circuitry Figure A																						
Object	+5V15.0A																							
<p>1. Graph</p> <p>[V]</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 100V Load 100%</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.067</td></tr> <tr><td>0.5</td><td>5.063</td></tr> <tr><td>1.0</td><td>5.063</td></tr> <tr><td>2.0</td><td>5.063</td></tr> <tr><td>3.0</td><td>5.063</td></tr> <tr><td>4.0</td><td>5.063</td></tr> <tr><td>5.0</td><td>5.063</td></tr> <tr><td>6.0</td><td>5.063</td></tr> <tr><td>7.0</td><td>5.063</td></tr> <tr><td>8.0</td><td>5.063</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	5.067	0.5	5.063	1.0	5.063	2.0	5.063	3.0	5.063	4.0	5.063	5.0	5.063	6.0	5.063	7.0	5.063	8.0	5.063
Time since start [H]	Output Voltage [V]																							
0.0	5.067																							
0.5	5.063																							
1.0	5.063																							
2.0	5.063																							
3.0	5.063																							
4.0	5.063																							
5.0	5.063																							
6.0	5.063																							
7.0	5.063																							
8.0	5.063																							



Model		PAA75F-5	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+5V15.0A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0.0~15.0 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$* \text{ Output Voltage Accuracy (Ration) } = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0.0~15.0 A


* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

$$* \text{ 定電圧精度(変動率) } = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-10	132	0.0	5.109	±23	±0.5
Minimum Voltage	50	85	15.0	5.063		




Model	PAA75F-5	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object	+5V15.0A		

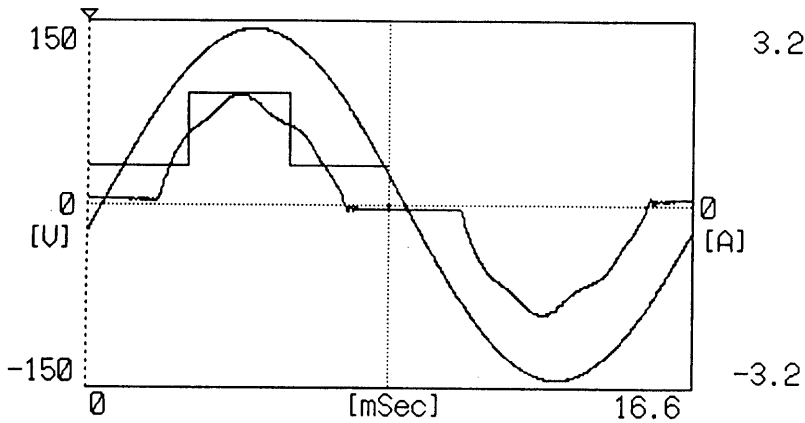

Conditions	Values
Input Voltage [V]	100
Input Current [A]	1.09
Active Power [W]	100.1
Apparent Power [VA]	108.5
Frequency [Hz]	60
Power Factor	0.923
Output Power [W]	75

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	1.016
2	—	0.000
3	0.783	0.380
4	—	0.000
5	0.437	0.076
6	—	0.000
7	0.230	0.034
8	—	0.000
9	0.115	0.066
10	—	0.000
11	0.081	0.026
12	—	0.000
13	0.068	0.022
14	—	0.000
15	0.059	0.018
16	—	0.000
17	0.052	0.004
18	—	0.000
19	0.047	0.015
20	—	0.000
21	0.042	0.005
22	—	0.000
23	0.039	0.010
24	—	0.000
25	0.035	0.007
26	—	0.000
27	0.033	0.002
28	—	0.000
29	0.031	0.007
30	—	0.000
31	0.029	0.002
32	—	0.000
33	0.027	0.003
34	—	0.000
35	0.025	0.004
36	—	0.000
37	0.024	0.001
38	—	0.000
39	0.023	0.003
40	—	0.000

2. Harmonic Current

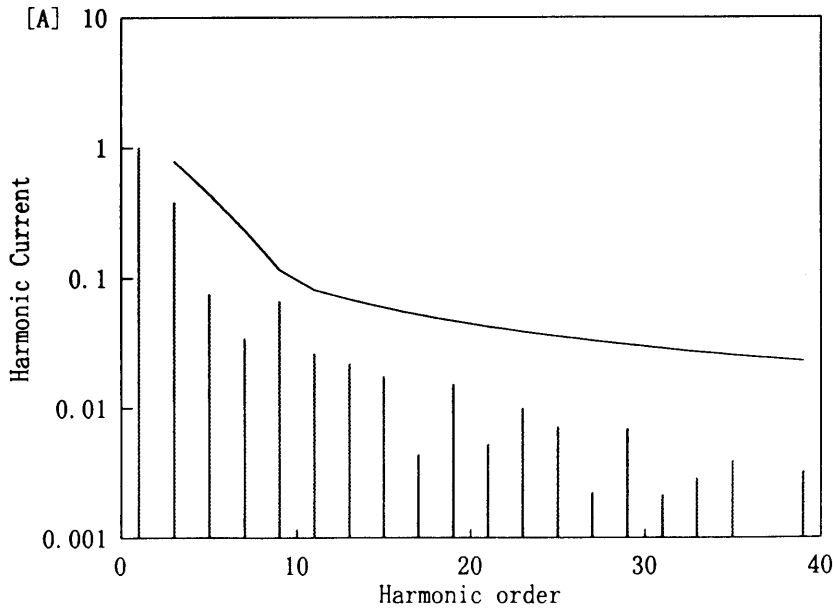


— Harmonic Current
高調波電流

- - - Limits for Class D equipment
クラスDの機器に対する限度値

COSEL


Model	PAA75F-5	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object	+5V15.0A		

Conditions	Values
Input Voltage [V]	100
Input Current [A]	0.55
Active Power [W]	47.8
Apparent Power [VA]	54.5
Frequency [Hz]	60
Power Factor	0.877
Output Power [W]	37.5

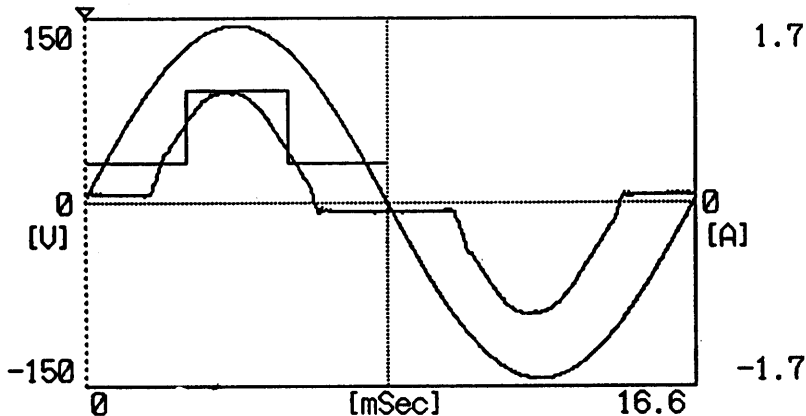

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.486
2	—	0.000
3	0.374	0.244
4	—	0.000
5	0.209	0.020
6	—	0.000
7	0.110	0.034
8	—	0.000
9	0.055	0.007
10	—	0.000
11	0.038	0.012
12	—	0.000
13	0.033	0.011
14	—	0.000
15	0.028	0.009
16	—	0.000
17	0.025	0.009
18	—	0.000
19	0.022	0.005
20	—	0.000
21	0.020	0.007
22	—	0.000
23	0.018	0.002
24	—	0.000
25	0.017	0.006
26	—	0.000
27	0.016	0.001
28	—	0.000
29	0.015	0.005
30	—	0.000
31	0.014	0.000
32	—	0.000
33	0.013	0.004
34	—	0.000
35	0.012	0.001
36	—	0.000
37	0.011	0.003
38	—	0.000
39	0.011	0.001
40	—	0.000

2. Harmonic Current

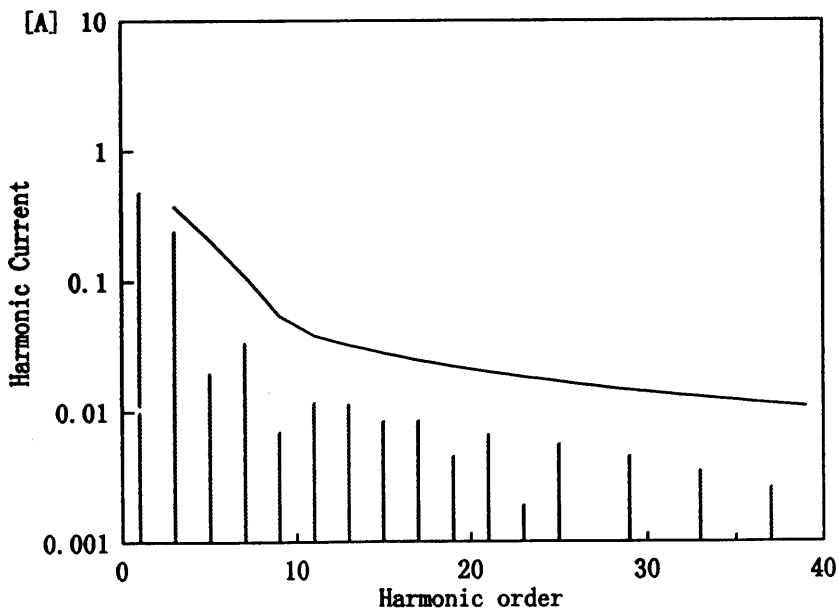

— Harmonic Current
 高調波電流
 - - - Limits for Class D equipment
 クラスDの機器に対する限度値



Model		PAA75F-5	Testing Circuitry	Figure A
Item		Condensation 結露特性		
Object		+5V15.0A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 1°C and the humidity is 40%RH.
- ③ Testing electrical characteristics (Output Voltage, Ripple Voltage, Ripple noise) of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温1°C、湿度40%RHの状態におき結露させ、その電気的特性（出力電圧、リップル、リップルノイズ）の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	5.076	30	70
	2	5.076	30	70
	3	5.078	30	70
Load 100 %	1	5.063	30	70
	2	5.064	30	70
	3	5.064	30	70

Input Volt. 100 V



Model		PAA75F-5	Testing Circuitry Figure A
Item		Leakage Current 漏洩電流	
Object		+5V15.0A	

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132[V]
(A) DENTORI	0.13	0.16	0.21
(B) UL	0.13	0.15	0.21
(C) CSA	0.13	0.15	0.21

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 220 [V]	Input Volt. 264 [V]
(D) VDE	-	-	-

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 兩相について測定し、その大きい方を漏洩電流測定値とする。

Load 100 %

- (A) Input Resistance :1K Ω
- (B) Input Resistance :1.5K Ω
Input Capacitance :0.15 μ F
- (C) Input Resistance :1.5K Ω
Input Capacitance :0.15 μ F
- (D) Input Resistance :2K Ω
Input Capacitance :0.1 μ F



Model		PAA75F-5	Testing Circuitry Figure C
Item		Line Noise Tolerance 入力雑音耐量	
Object		+5V15.0A	

1. Results

Pulse Width [n S]	MODE	Operating Point of Overvoltage Protection [V] 過電圧保護動作値	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	6.50	no regulation
	NORMAL	6.30	no regulation
1000	COMMON	6.40	no regulation
	NORMAL	6.40	no regulation

Conditions

Input Voltage :100 V
 Pulse Voltage :2000 V
 Pulse Cycle :10 mS
 Pulse Input Duration:1 min. or more
 Load :100 %



Model	PAA75F-5	Testing Circuitry	Figure D
Item	Conducted Emission 雑音端子電圧		
Object	+5V15.0A		

1. Graph



Remarks

Input Volt. 120 V
Load 100 %

Note: Slanted line shows the range of Tolerance.

(注)斜線は許容値を示す。

NO	Standards	Standards Complied	Frequency [MHz]	Tolerance [dB/μV]
1	FCC class A		0.45~1.6	60
			1.6~30	69.5
2	FCC class B	○	0.45~30	48
3	VCCI -1		0.15~0.5	79
			0.5~30	73
4	VCCI -2	○	0.15~0.5	66-56
			0.5~5	56
			5~30	60
5	CISPR22-A		0.01~0.15	91-69.5
			0.15~0.5	66
			0.5~30	60
6	CISPR22-B		0.01~0.05	110
			0.05~0.15	90-80
			0.15~0.5	66-56
			0.5~5	56
			5~30	60

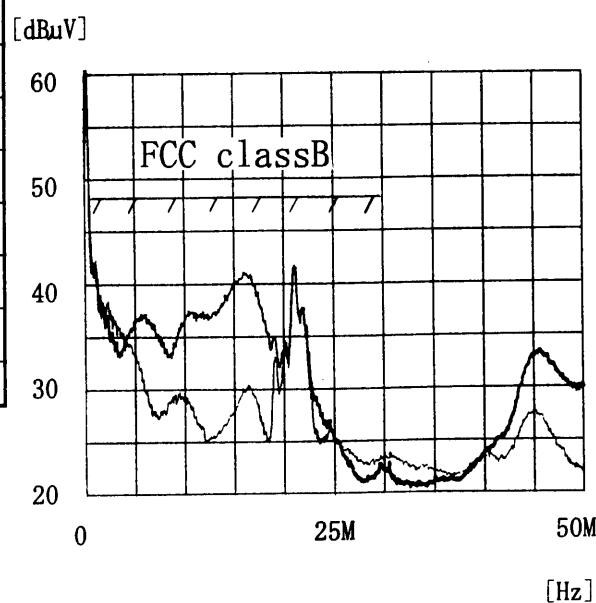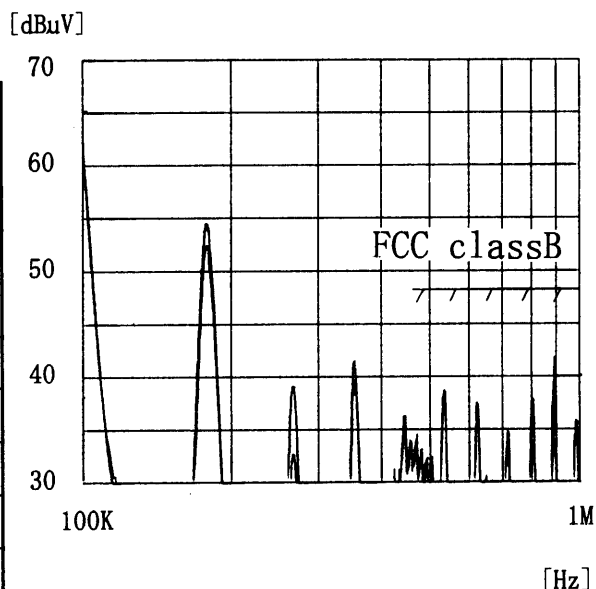

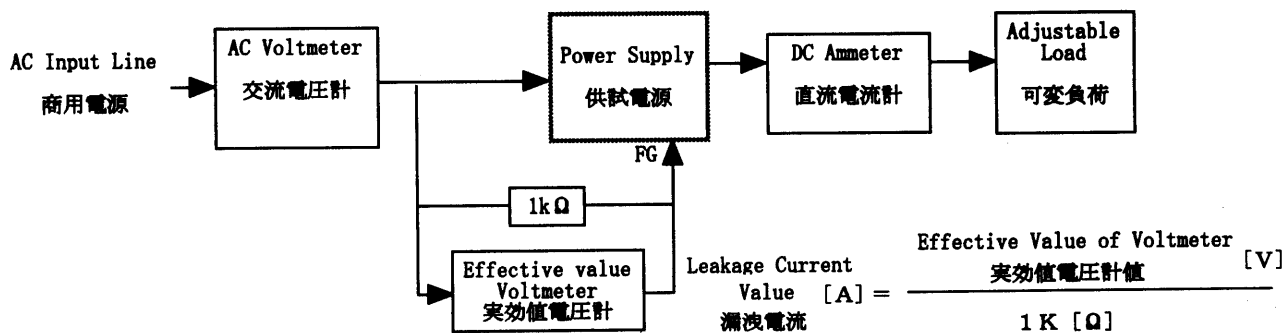
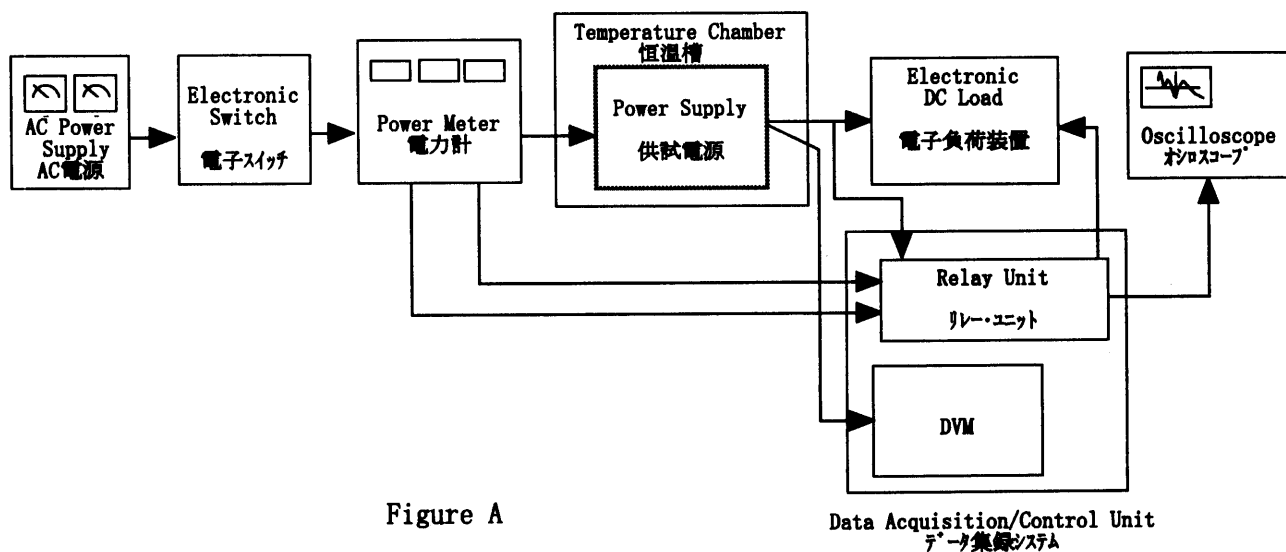


Figure B (DENTORI)

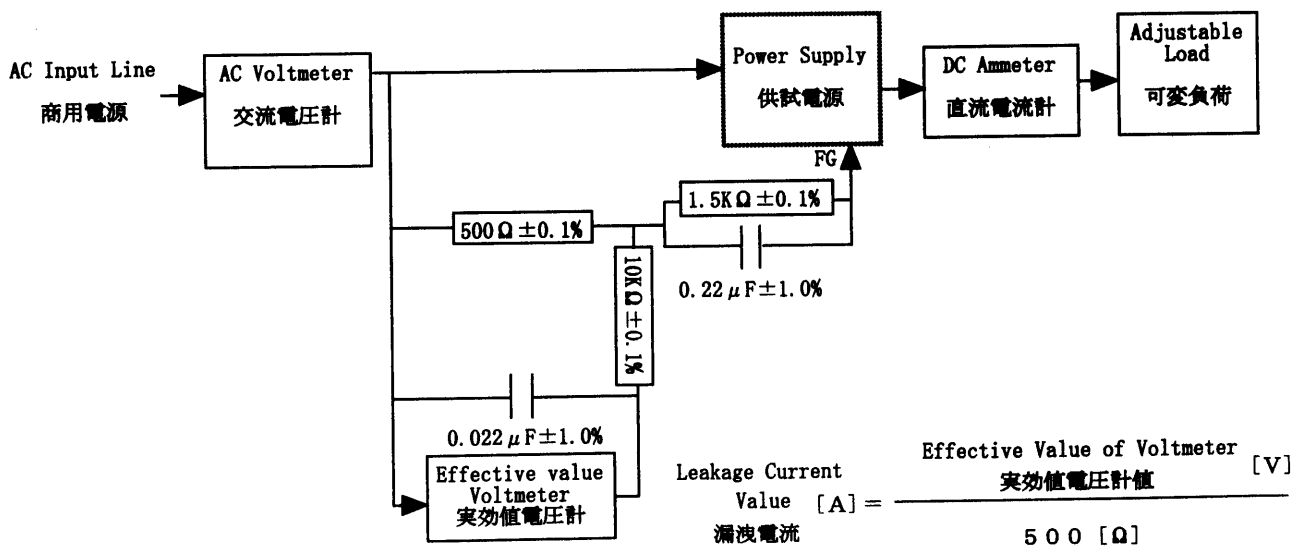


Figure B (UL, CSA, VDE)

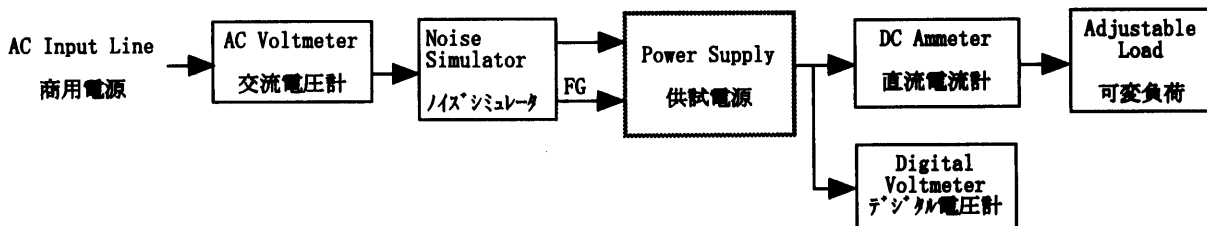


Figure C

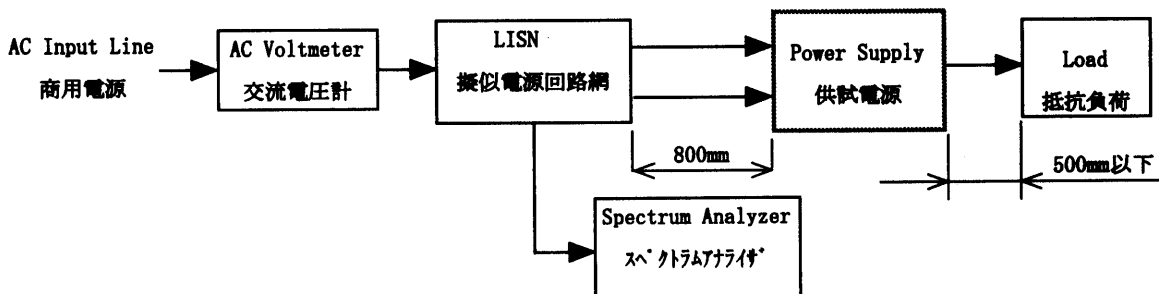


Figure D

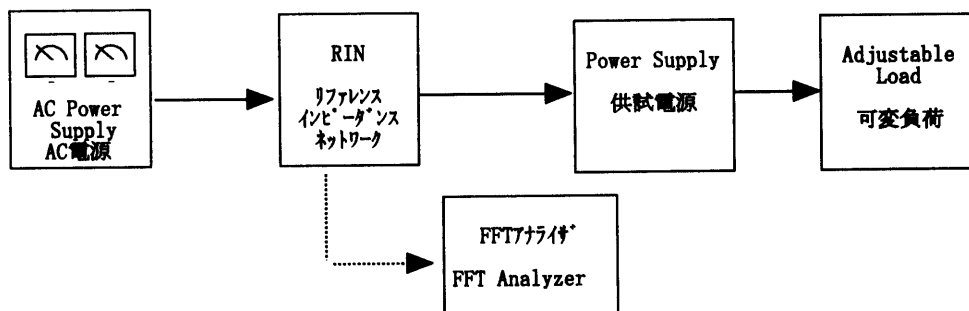


Figure E