



<b>DATA SHEET</b>		Date	09-Feb-21
Model	PCA1500F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Miyazaki

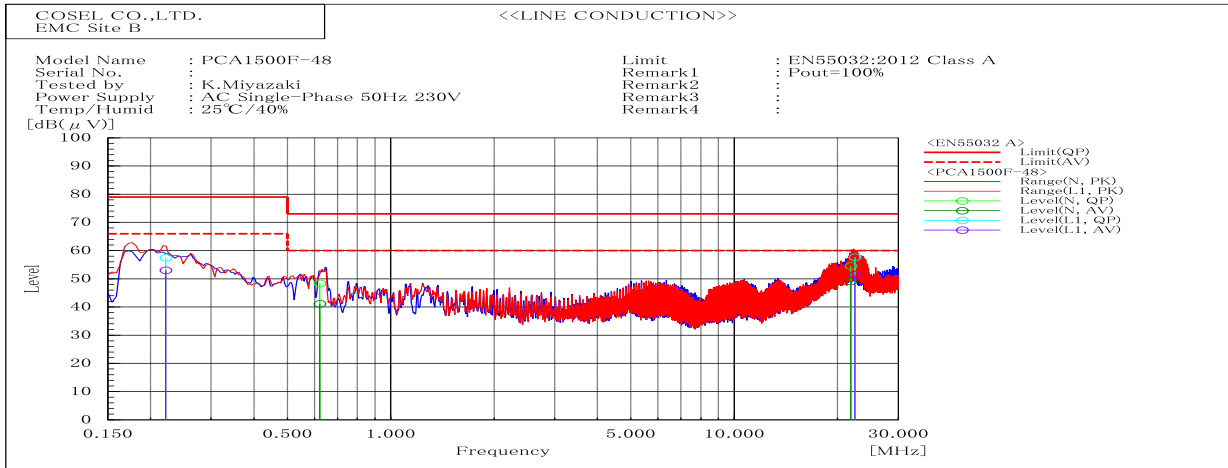


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.221	L1	57.5	53	79	79	66	21.5	13	Pass
22.457	L1	57.7	51.5	73	73	60	15.3	8.5	Pass
0.621	N	48.4	41.2	73	73	60	24.6	18.8	Pass
21.834	N	54.6	49.1	73	73	60	18.4	10.9	Pass

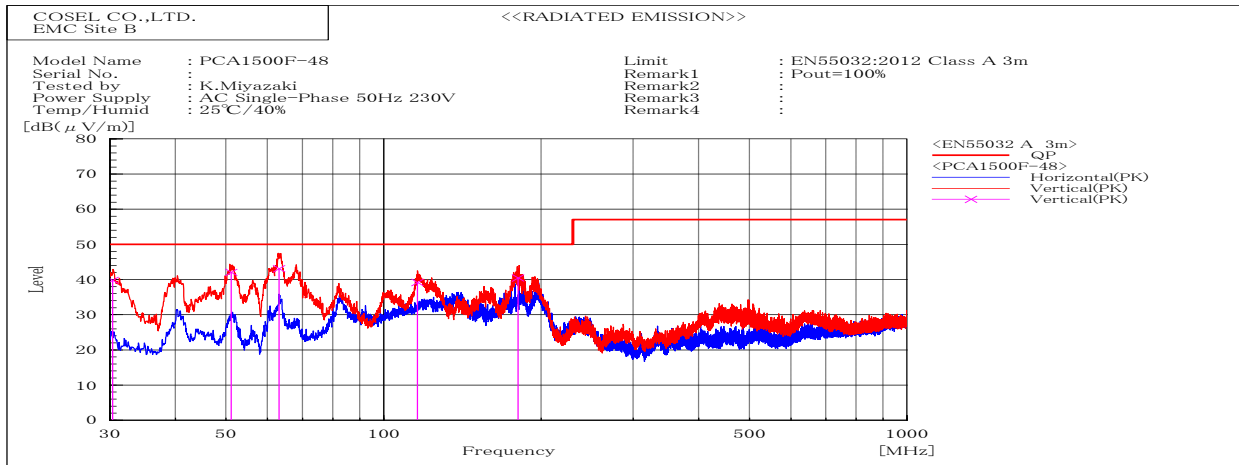


Frequency MHz	Polarization	Stability	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
30.331	V	Stable	39.8	50	10.2	Pass	100.2	0	
51.153	V	Stable	42.1	50	7.9	Pass	101.6	112.2	
63.077	V	Stable	43.1	50	6.9	Pass	100	0	
180.57	V	Stable	40.5	50	9.5	Pass	100	169	
115.988	V	Stable	39.2	50	10.8	Pass	115.3	296	

DATA SHEET		Date	09-Feb-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Miyazaki

## 1. Line conduction

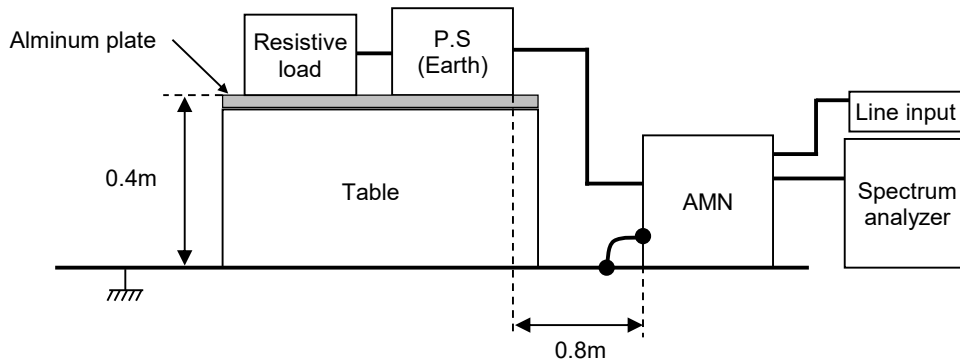

## 2. Radiated emission

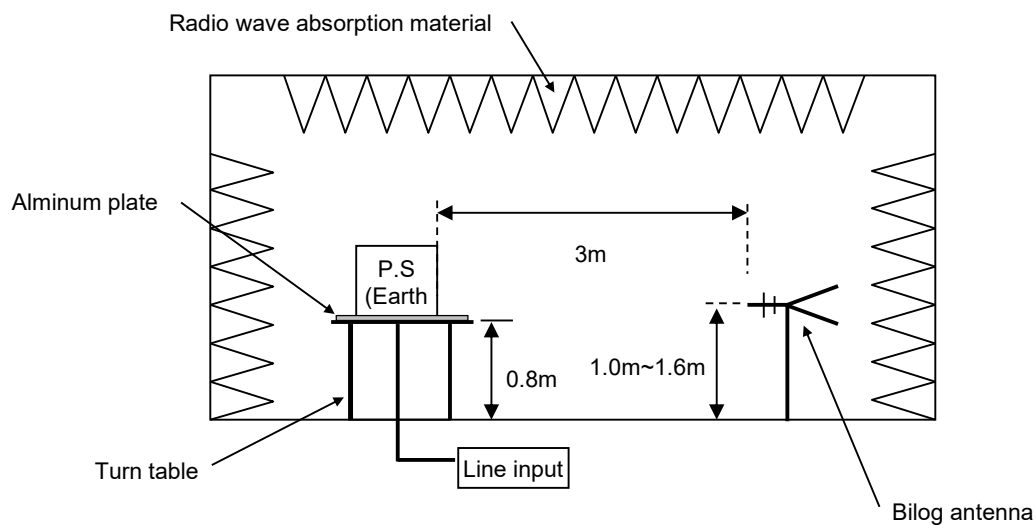


## Conditions

Test : EMI  
Model Name : PCA1500F-48

## Photographs of test set-up

### 1.LINE CONDUCTION

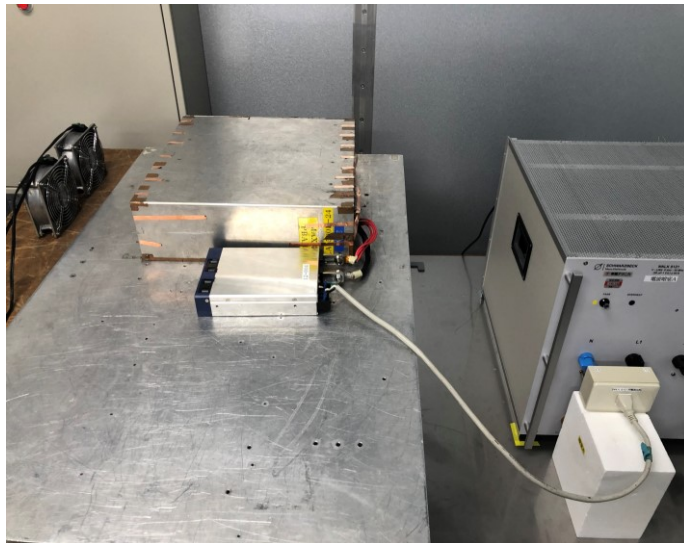

### 2.RADIATED EMISSION

