


## PDA100F-24-N Expected Life : 推定寿命

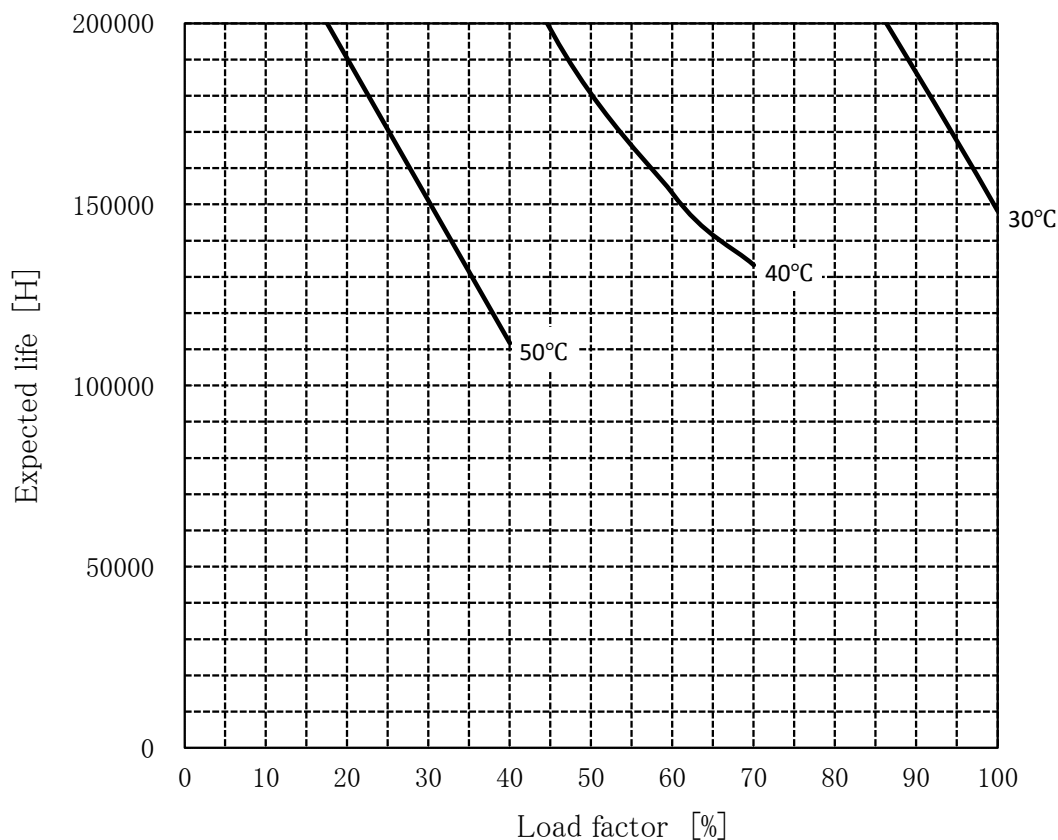

- Above expected life time is calculated according our calculation standard.  
上記推定寿命は、当社算出基準に従い算出したものです。
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.  
10万時間以上の領域では、封ロゴムの劣化等の影響は、計算式には含まれていません。
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature. The upper limit of ambient temperature is, please refer the derating table in the instruction manual.

## Conditions


(1) Input voltage 85~264VAC 60Hz

(2) Output voltage/  
current

| DC<br>OUTPUT | Load factor |       |       |       |
|--------------|-------------|-------|-------|-------|
|              | 100%        | 75%   | 50%   | 25%   |
| 24V          | 4.5A        | 3.38A | 2.25A | 1.13A |

(3) Cooling method Convection

(4) Mounting method Refer to the below

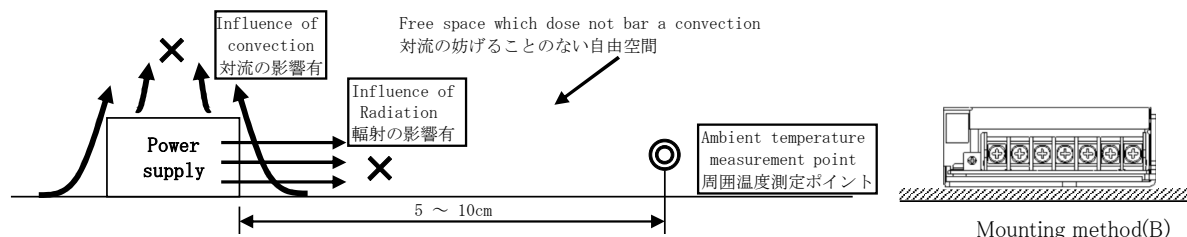

With the ambient temperature of graph, it measures in the environment of a figure.  
グラフの周囲温度とは、図の環境で測定したものです。