



DATA SHEET		Date	09-Nov-18
Model	RBC200F-LKY	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Tatsushima

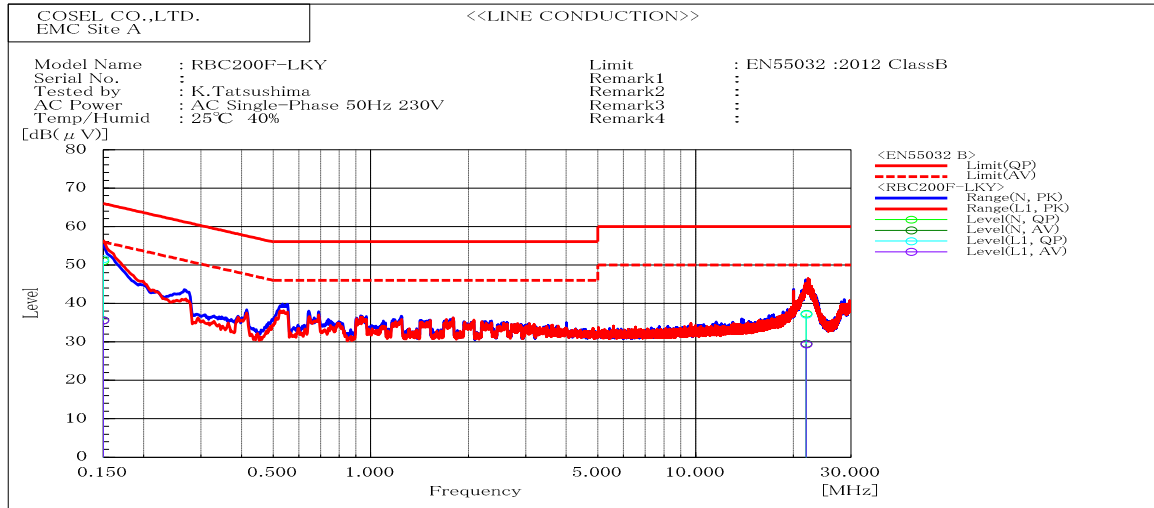


Frequency MHz	Line	Level dB(µV)		Limit dB(µV)		Margin dB(µV)		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.15	L1	51.5	35.6	66	56	14.5	20.4	Pass	
21.89	N	37.3	29.5	60	50	22.7	20.5	Pass	

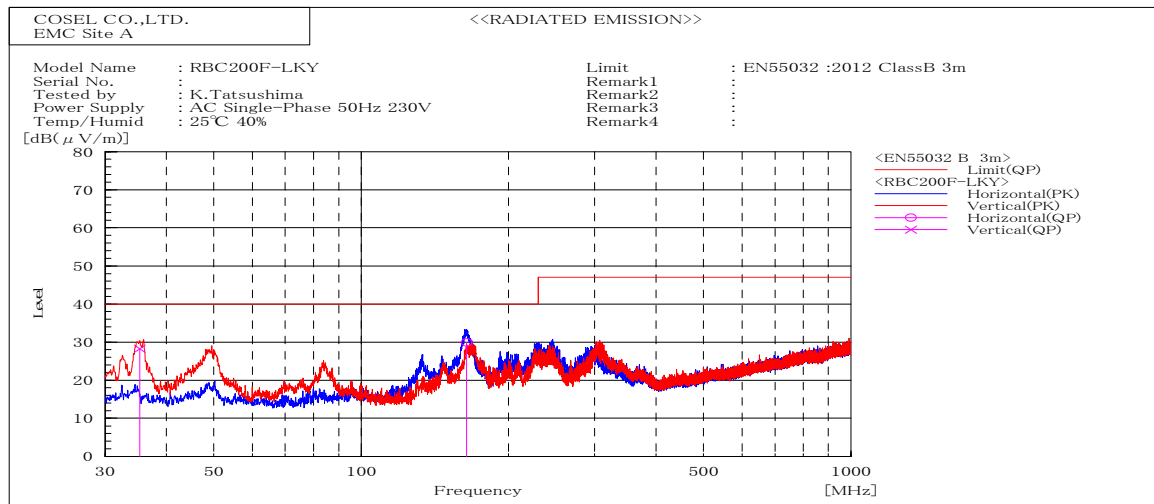


Frequency MHz	Polarization	Stability	Reading dB(µV/m) QP	Limit dB(µV/m) QP	Margin dB(µV/m) QP	Pass/Fail	Height cm	Angle deg	Remark
164.194	H	Stable	40.9	40	10.1	Pass	252.8	0	
35.315	V	Stable	40.9	40	11.7	Pass	100.2	49.7	

DATA SHEET		Date	09-Nov-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Tatsushima

1. Line conduction

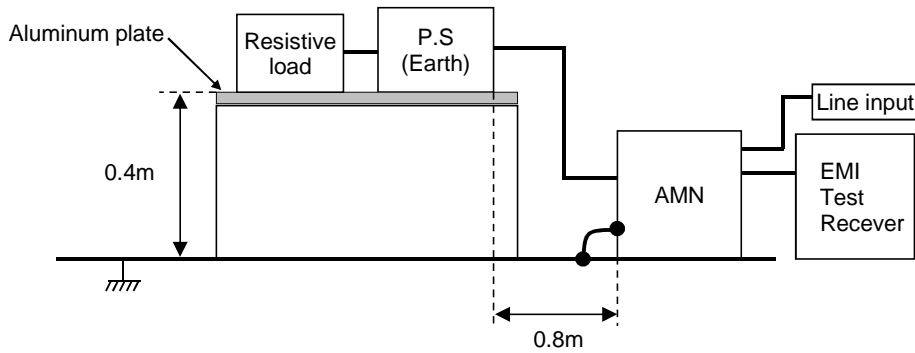

2. Radiated emission

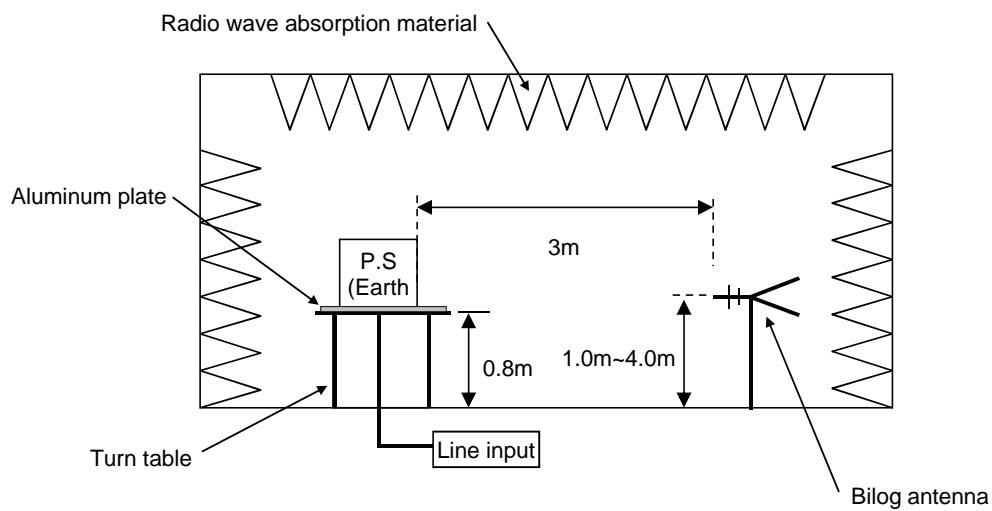


Conditions

Test : EMI
Model Name : RBC200F-LKY

Photographs of test set-up

1.LINE CONDUCTION

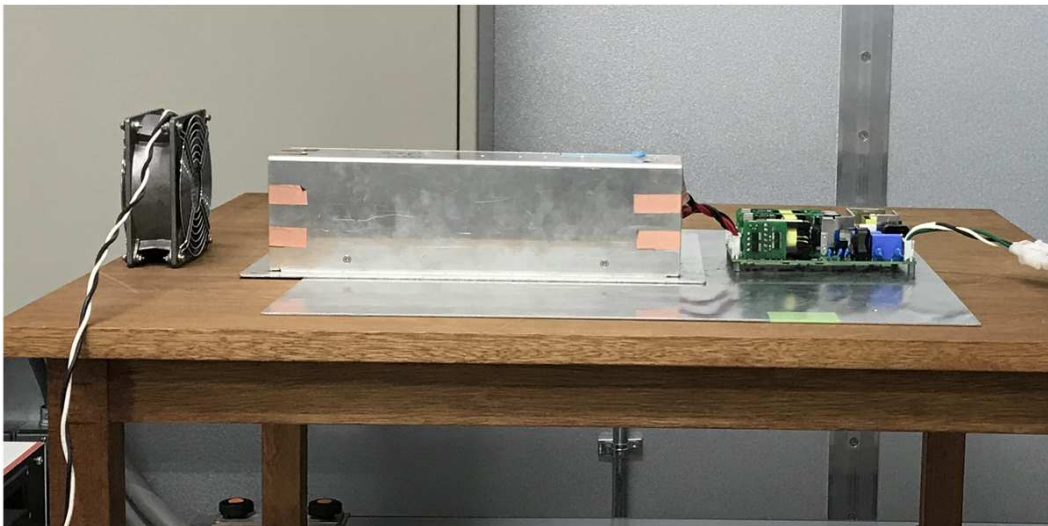

2.RADIATED EMISSION

