参考資料

COSEL

TEST DATA OF MODULE H

(RB series)

Regulated DC Power Supply
November 5, 2018

Approved by : Jun Uchida
Jun Uchida Design Manager

Prepared by : Hideaki Douguchi
Hideaki Douguchi Design Engineer

COSEL CO.,LTD.

COSEL

CONTENTS

1.Line Regulation ・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・ 1
2.Load Regulation ・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・ 2
3.Dynamic Load Response ・・・・・・・・・・・・・・・・・・・・・・・・・・・・ 3
4.Ripple Voltage (by Load Current) ・・・・・・・・・・・・・・・・・・・・・・・ 4
5.Ripple-Noise ・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・ 5
6.Ripple Voltage (by Ambient Temperature) ・・・・・・・・・・・・・・・・・・・ 6
7.Ambient Temperature Drift ・・・・・・・・・・・・・・・・・・・・・・・・・・ 7
8.Output Voltage Accuracy ・・・・・・・・・・・・・・・・・・・・・・・・・・・ 8
9.Time Lapse Drift ・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・ 9
10.Overcurrent Protection ・・・・・・・・・・・・・・・・・・・・・・・・・・・・ 10
11.Overvoltage Protection ・・・・・・・・・・・・・・・・・・・・・・・・・・・・ 11
12.Figure of Testing Circuitry ・・・・・・・・・・・・・・・・・・・・・・・・・・ 12
(Final Page 12)

COSEL

Model	MODULE H
Item	Line Regulation
Object	+5V5A

Temperature 25°C
Testing Circuitry Figure A

1.Graph

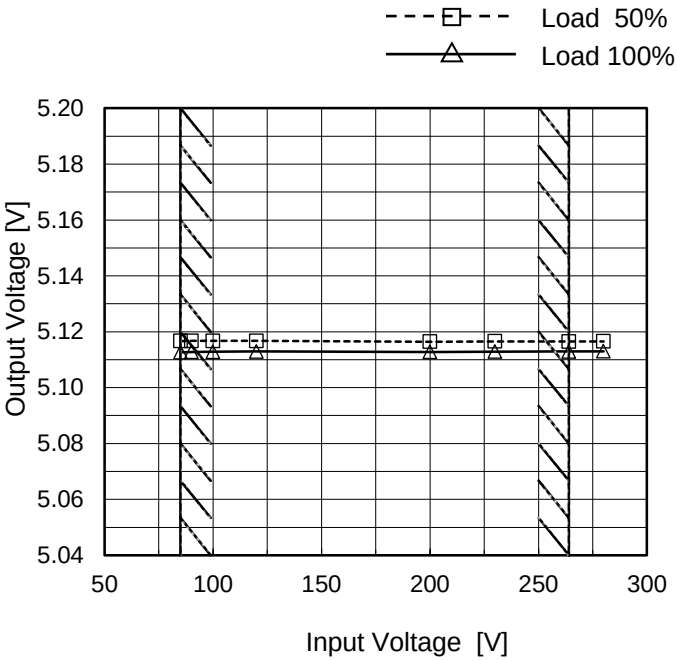

Note: Slanted line shows the range of the rated input voltage.

2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
85	5.117	5.113
90	5.117	5.113
100	5.117	5.113
120	5.117	5.113
200	5.116	5.113
230	5.117	5.113
264	5.117	5.113
280	5.117	5.113
--	-	-

BC-11294

COSEL

Model	MODULE H
Item	Load Regulation
Object	+5V5A

Temperature 25°C
Testing Circuitry Figure A

1.Graph

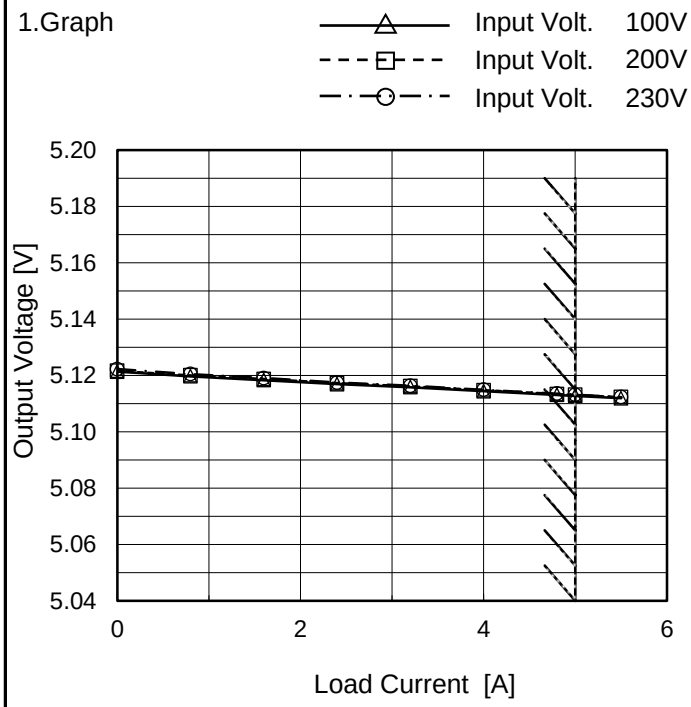

Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Output Voltage [V]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.0	5.121	5.122	5.122
0.8	5.120	5.120	5.121
1.6	5.118	5.119	5.119
2.4	5.117	5.117	5.118
3.2	5.116	5.116	5.116
4.0	5.114	5.115	5.115
4.8	5.113	5.113	5.114
5.0	5.113	5.113	5.113
5.5	5.112	5.112	5.112
--	-	-	-
--	-	-	-

BC-11294

COSEL

Model	MODULE H	
Item	Dynamic Load Response	Temperature 25°C Testing Circuitry Figure A
Object	+5V5A	

Input Volt. 100 V
Cycle 1000 ms

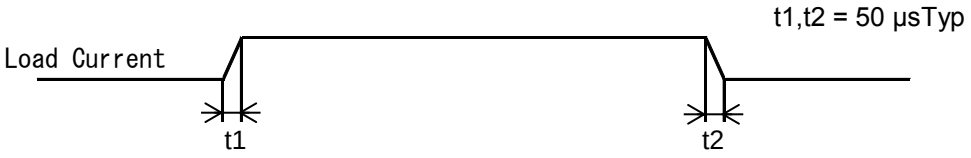

Min.Load (0A)←→
Load 100% (5A)

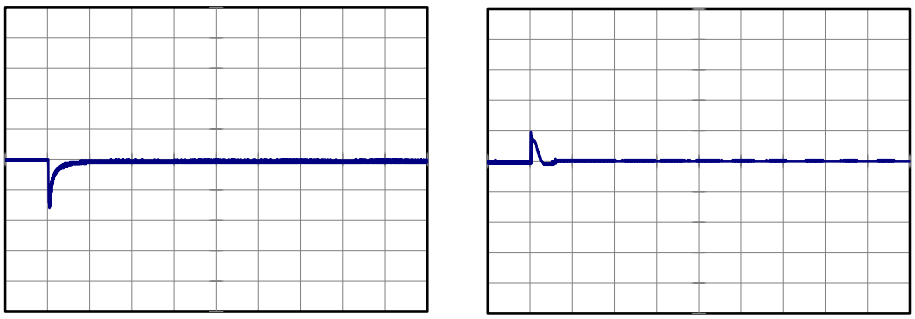

200 mV/div

4 ms/div 10 ms/div

Min.Load (0A)←→
Load 50% (2.5A)

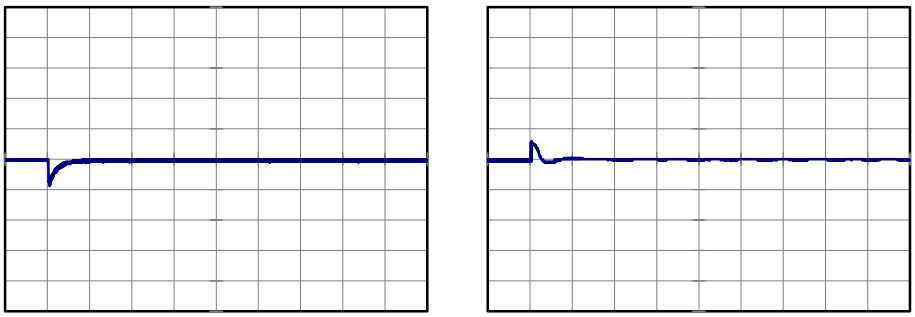

200 mV/div

4 ms/div 10 ms/div

COSEL

Model	MODULE H
Item	Ripple Voltage (by Load Current)
Object	+5V5A

Temperature 25°C
Testing Circuitry Figure B

1.Graph

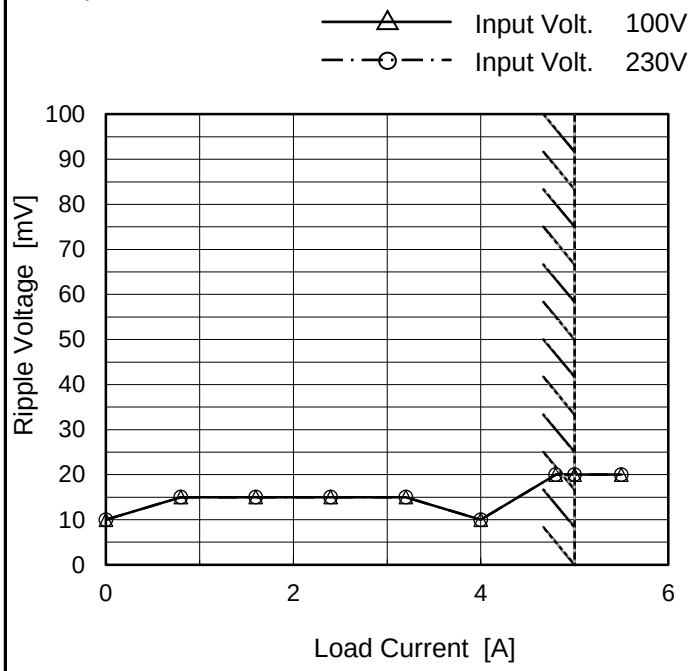

Measured by 20 MHz Oscilloscope.
Ripple Voltage is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.

T1: Due to AC Input Line
T2: Due to Switching

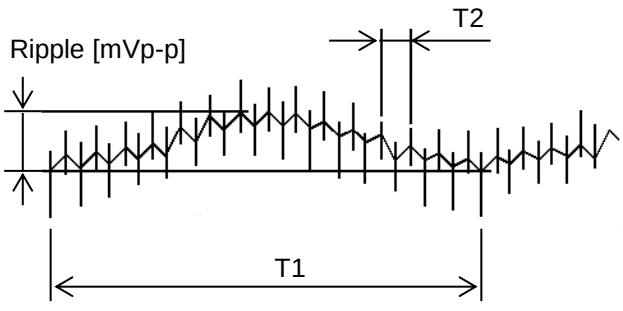

Fig. Complex Ripple Wave Form

2.Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 100 [V]	Input Volt. 230 [V]
0.0	10	10
0.8	15	15
1.6	15	15
2.4	15	15
3.2	15	15
4.0	10	10
4.8	20	20
5.0	20	20
5.5	20	20
--	-	-
--	-	-

COSEL

Model	MODULE H
Item	Ripple-Noise
Object	+5V5A

Temperature 25°C
Testing Circuitry Figure B

1.Graph

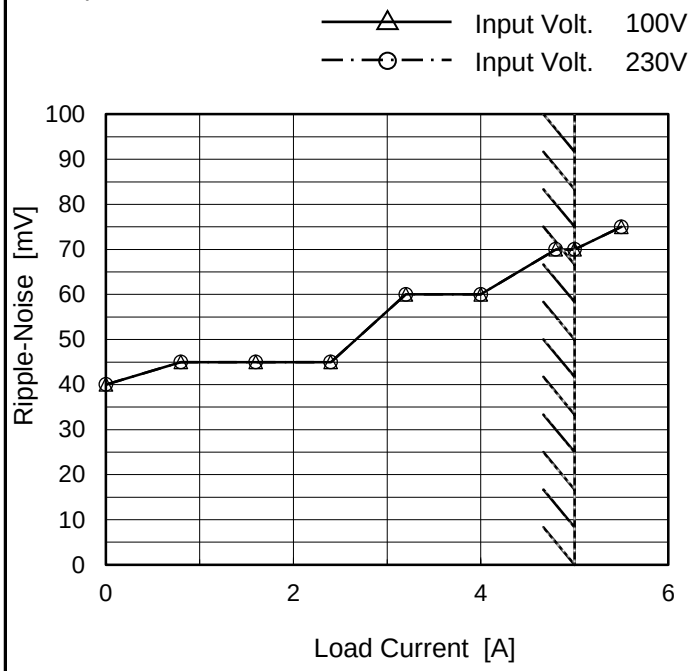

Measured by 20 MHz Oscilloscope.
Ripple-Noise is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 100 [V]	Input Volt. 230 [V]
0.0	40	40
0.8	45	45
1.6	45	45
2.4	45	45
3.2	60	60
4.0	60	60
4.8	70	70
5.0	70	70
5.5	75	75
--	-	-
--	-	-

T1: Due to AC Input Line
T2: Due to Switching

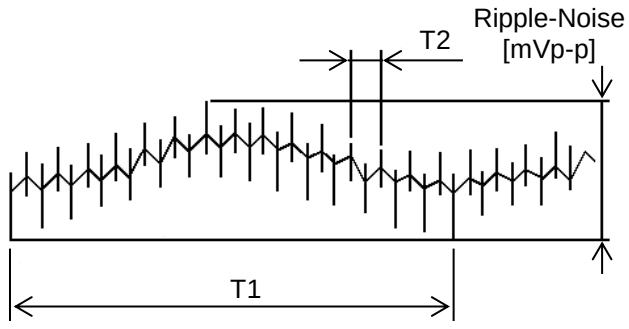

Fig. Complex Ripple Wave Form

COSEL

Model	MODULE H
Item	Ripple Voltage (by Ambient Temp.)
Object	+5V5A

Testing Circuitry Figure B

1.Graph

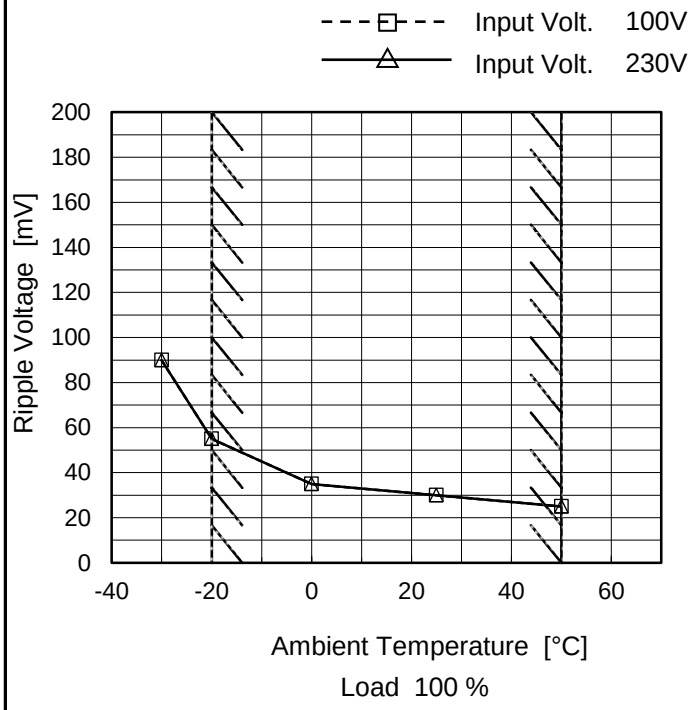

Load 100 %

Measured by 20 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Input Volt. 100 [V]	Input Volt. 230 [V]
-30	90	90
-20	55	55
0	35	35
25	30	30
50	25	25
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

COSEL

Model	MODULE H
Item	Ambient Temperature Drift
Object	+5V5A

Testing Circuitry Figure A

1.Graph

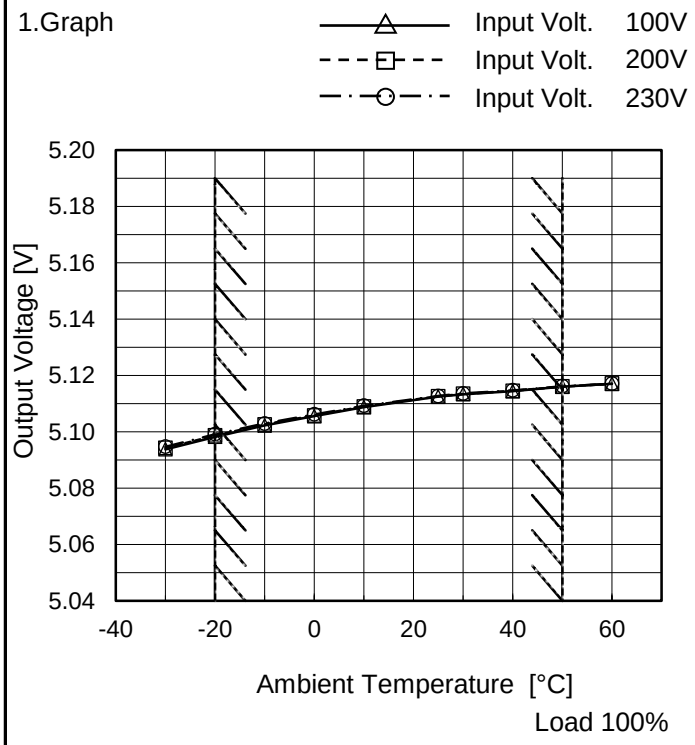

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
-30	5.094	5.094	5.095
-20	5.098	5.099	5.099
-10	5.102	5.103	5.103
0	5.106	5.106	5.106
10	5.109	5.109	5.109
25	5.113	5.113	5.113
30	5.113	5.113	5.114
40	5.114	5.115	5.115
50	5.116	5.116	5.116
60	5.117	5.117	5.117
--	-	-	-

Model	MODULE H	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+5V5A	

1.Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20 - 50°C
Input Voltage : 85 - 264V
Load Current : 0 - 5A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$\text{* Output Voltage Accuracy (Ratio)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2.Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	50	85	0	5.125	±14	±0.3
Minimum Voltage	-20	85	5	5.097		

COSEL

Model	MODULE H
Item	Time Lapse Drift
Object	+5V5A

Temperature 25°C
Testing Circuitry Figure A

1.Graph

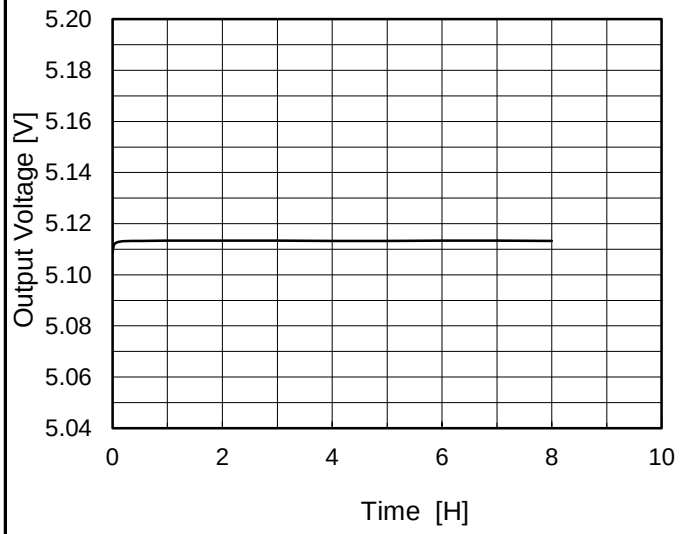

Input Volt. 100V
Load 100%

* The characteristic of AC230V is equal.

2.Values

Time since start [H]	Output Voltage [V]
0.0	5.109
0.5	5.113
1.0	5.113
2.0	5.113
3.0	5.113
4.0	5.113
5.0	5.113
6.0	5.113
7.0	5.113
8.0	5.113

COSEL

Model	MODULE H
Item	Overcurrent Protection
Object	+5V5A

Temperature 25°C
Testing Circuitry Figure A

1.Graph

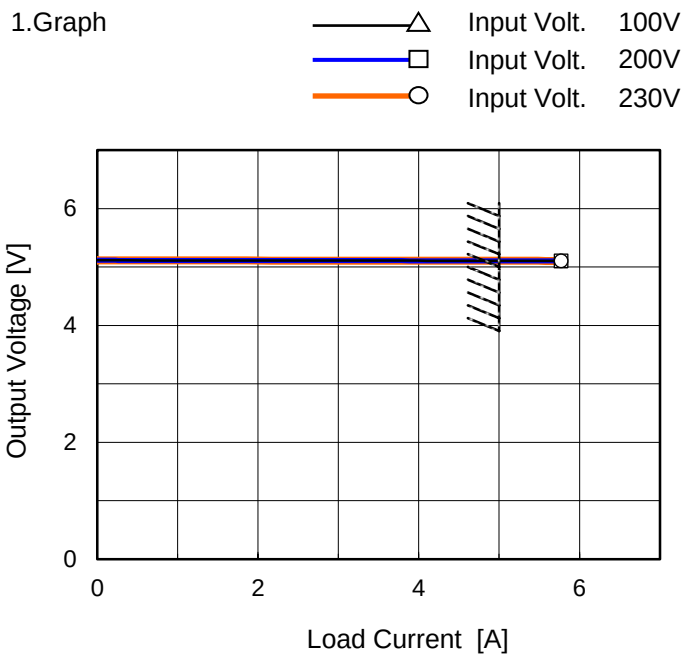

Note: Slanted line shows the range of the rated load current.

Intermittent operation occurs when overcurrent protection is activated.

2.Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
5	5.77	5.77	5.77
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Model	MODULE H
Item	Overvoltage Protection
Object	+5V5A

Testing Circuitry Figure A

1.Graph

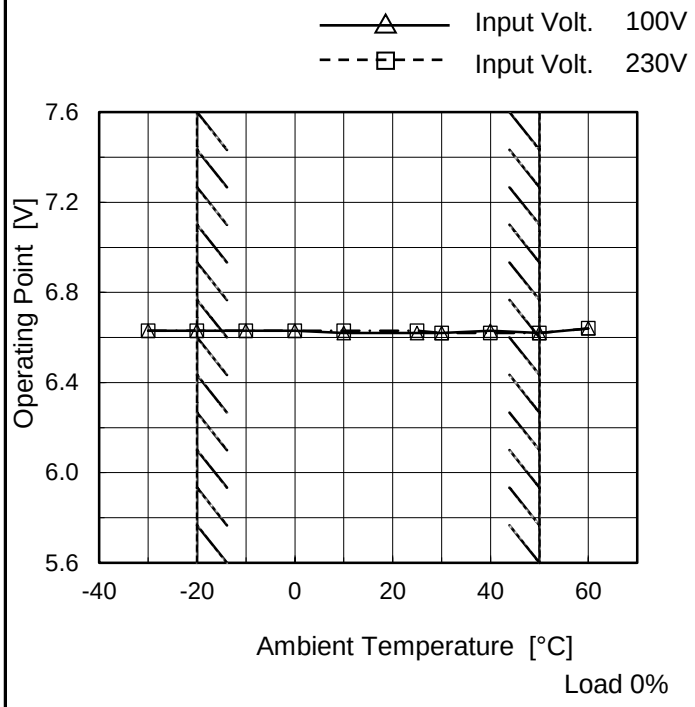

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 100[V]	Input Volt. 230[V]
-30	6.63	6.63
-20	6.63	6.63
-10	6.63	6.63
0	6.63	6.63
10	6.62	6.63
25	6.62	6.63
30	6.62	6.62
40	6.63	6.62
50	6.62	6.62
60	6.64	6.64
--	-	-

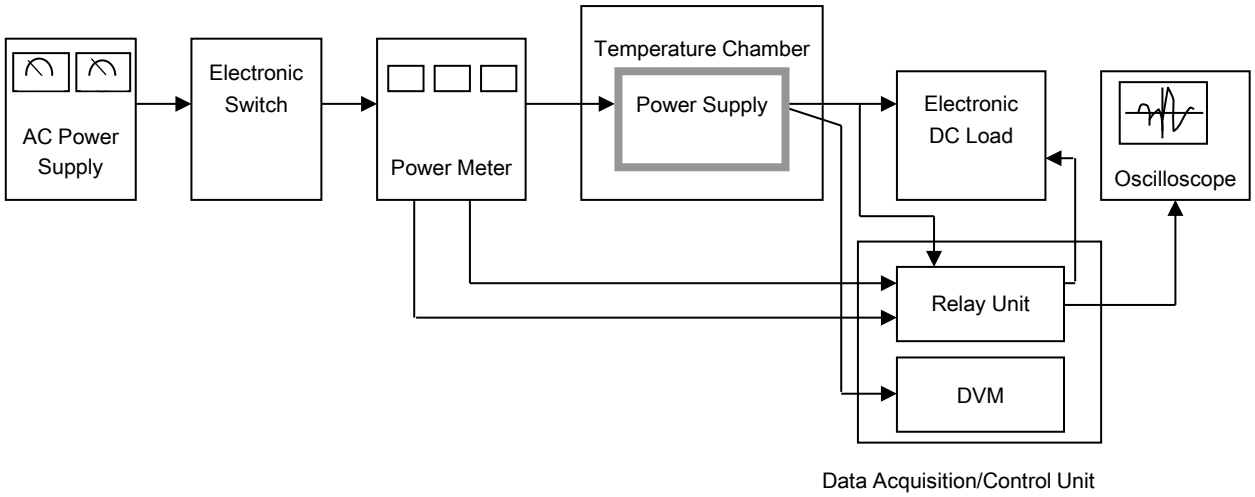

Figure A

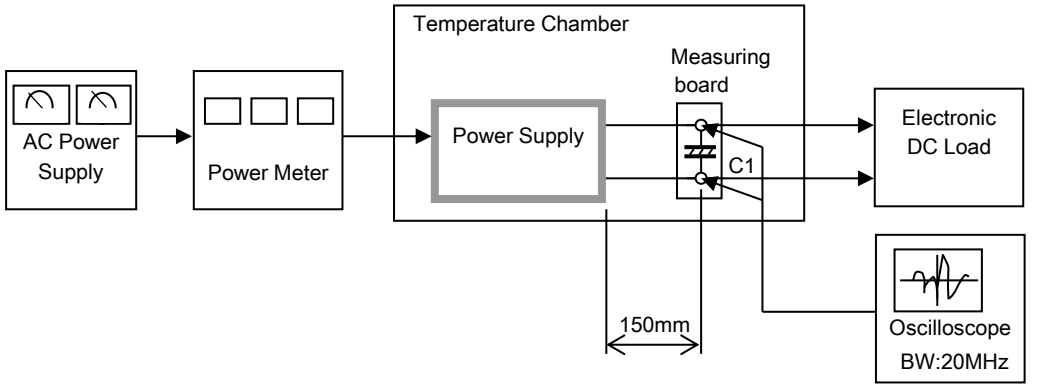

C1= 22 μF
(Electrolytic capacitor)

Figure B