


DATA SHEET		Date	25-Oct-06
Model	SFLS304805	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Tamura

**LINE CONDUCTION**

Model Name : SFLS304805  
 Model No. :  
 Serial No. :  
 Points : 1  
 Detector : PEAK/QP/Ave.  
 Line Mode : VB  
 Power Supply : DC48V  
 Temp. : 25  
 Limit1: [CISPR Pub11] Class A Gr.1(QP)  
 Limit2: [CISPR Pub11] Class A Gr.1(Ave.)

Humi. : 45  
 Date : 2006/10/25 18:01  
 Test Equip. : R3132,ESPC  
 Load Line : 100mm  
 Comment : Y.Tamura  
 Vin=48V  
 Io=6A

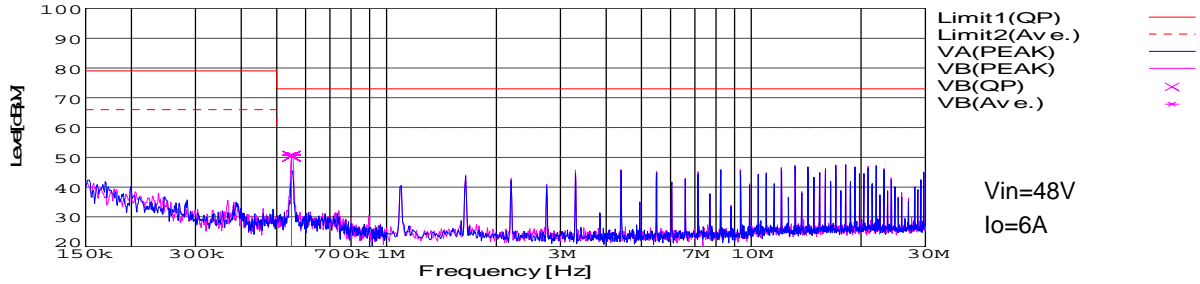


Frequency [MHz]	Meter Reading (Ave.) [dBμV]	Meter Reading (QP) [dBμV]	Factor [dB]	Level(Ave.) [dBμV]	Level(QP) [dBμV]	Line	Limit(Ave.) [dBμV]	Limit(QP) [dBμV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.5497	40.9	40.5	9.9	50.8	50.4	VB	60	73	9.2	22.6

**RADIATED EMISSION**

Model Name : SFLS304805  
 Model No. :  
 Serial No. :  
 Points : 3  
 Detector : PEAK/QP  
 Polarization : Vertical  
 Power Supply : DC48,u  
 Temp. : 25  
 Limit: [CISPR 11] Class A Group 1<3m>


Humi. : 45  
 Date : 2007/5/14 22:10  
 Test Equip. : R3132,ESPC  
 Load Line : 100mm  
 Comment : Y.Tamura  
 Vin=48V  
 Io=6A

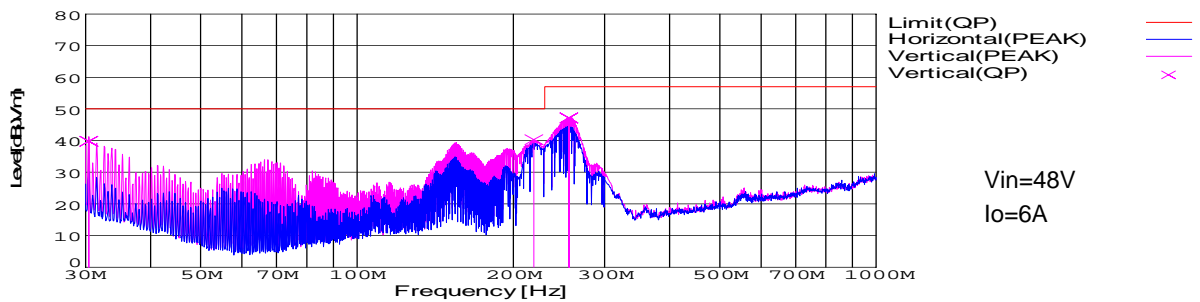

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBμV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
30.439	54.1	BL	18	-32.3	39.8	221	101	Vert.	50	10.2
219.063	62.6	BL	8.9	-31.2	40.3	136	111	Vert.	50	9.7
256.02	65.1	BL	13.2	-31.1	47.2	166	110	Vert.	57	9.8

DATA SHEET		Date	25-Oct-06
Model	SFLS304805	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Tamura

## 1. Line conduction

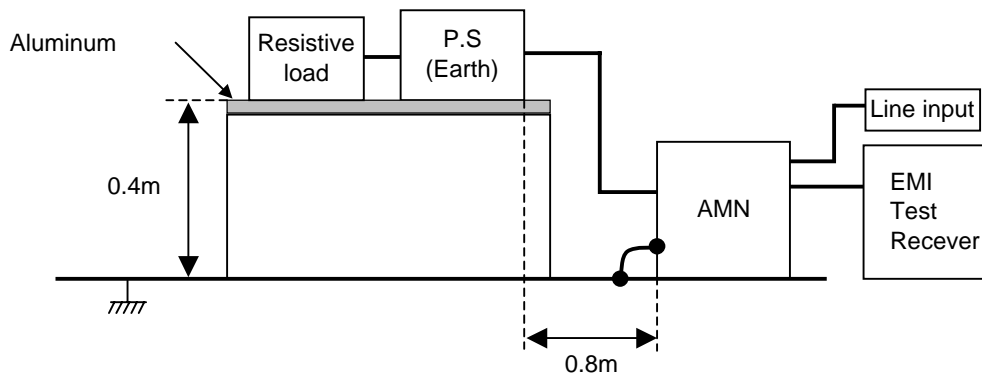

## 2. Radiated emission

