


DATA SHEET		Date	29-Mar-07
Model	SFLS30481R2	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	T.Oiwake

LINE CONDUCTION


Model Name	: SFLS30481R2	Humi.	: 45
Model No.	:	Date	: 2007/3/29 14:39
Serial No.	:	Test Equip.	: R3132,ESPC
Points	: 2	Load Line	: 100mm
Detector	: PEAK/QP/Ave.	Comment	: T.Oiwake
Line Mode	: VB	Vin=48V	
Power Supply	: DC48V	Io=12A	
Temp.	: 25		
Limit1: [CISPR Pub11] Class A Gr.1(QP)			
Limit2: [CISPR Pub11] Class A Gr.1(Ave.)			

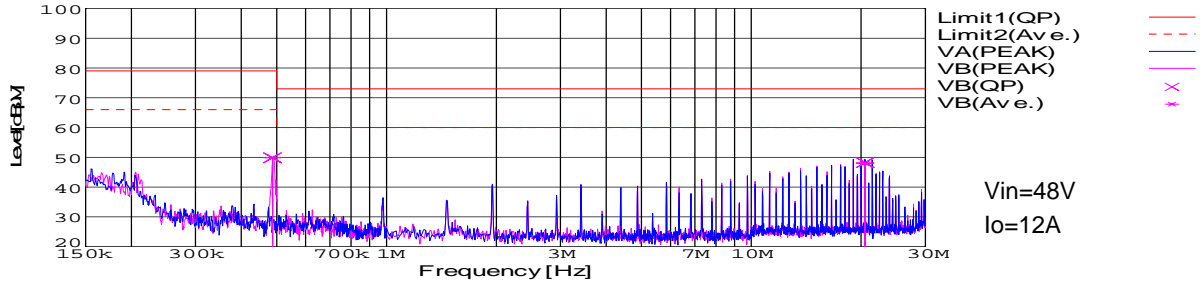

Frequency [MHz]	Meter Reading (Ave.) [dBμV]	Meter Reading (QP) [dBμV]	Factor [dB]	Level(Ave.) [dBμV]	Level(QP) [dBμV]	Line	Limit(Ave.) [dBμV]	Limit(QP) [dBμV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.4873	40	40	9.9	49.9	49.9	VB	66	79	16.1	29.1
20.4839	37.8	37.9	10.3	48.1	48.2	VB	60	73	11.9	24.8

RADIATED EMISSION


Model Name	: SFLS30481R2	Humi.	: 45
Model No.	:	Date	: 2007/3/29 16:12
Serial No.	:	Test Equip.	: R3132,ESPC
Points	: 2	Load Line	: 100mm
Detector	: PEAK/QP	Comment	: T.Oiwake
Polarization	: Vertical	Vin=48V	
Power Supply	: DC48V	Io=12A	
Temp.	: 25		
Limit: [CISPR 11] Class A Group 1<3m>			

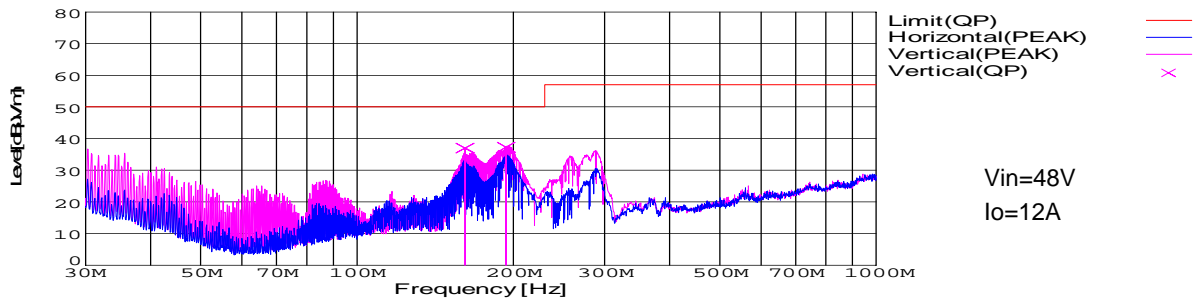

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBμV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
161.45	58.7	BL	9.8	-31.5	37	9	157	Vert.	50	13
193.681	60.2	BL	8.4	-31.3	37.3	176	110	Vert.	50	12.7

DATA SHEET		Date	29-Mar-07
Model	SFLS30481R2	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	T.Oiwake

1. Line conduction

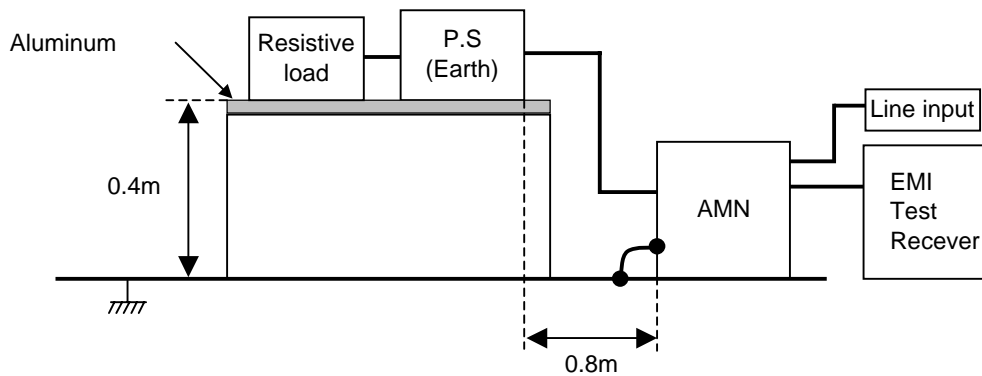

2. Radiated emission

