


DATA SHEET		Date	31-Jul-06
Model	SFLS30483R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Tamura

LINE CONDUCTION


Model Name	: SFLS30483R3	Humi.	: 45
Model No.	:	Date	: 2006/7/31 16:28
Serial No.	:	Test Equip.	: R3132,ESPC
Points	: 1	Load Line	: 100mm
Detector	: PEAK/QP/Ave.	Comment	: Y.Tamura
Line Mode	: VB	Vin=48V	
Power Supply	: DC48V	Io=9A	
Temp.	: 25		
Limit1:	[CISPR Pub11] Class A Gr.1(QP)		
Limit2:	[CISPR Pub11] Class A Gr.1(Ave.)		

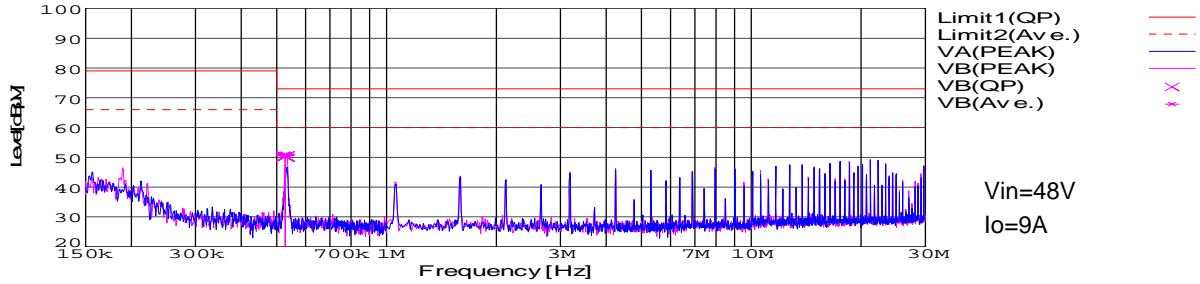

Frequency [MHz]	Meter Reading (Ave.) [dBμV]	Meter Reading (QP) [dBμV]	Factor [dB]	Level(Ave.) [dBμV]	Level(QP) [dBμV]	Line	Limit(Ave.) [dBμV]	Limit(QP) [dBμV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.5285	41	40.4	9.9	50.9	50.3	VB	60	73	9.1	22.7

RADIATED EMISSION


Model Name	: SFLS30483R3	Humi.	: 45
Model No.	:	Date	: 2007/6/5 15:11
Serial No.	:	Test Equip.	: R3132,ESPC
Points	: 2	Load Line	: 100mm
Detector	: PEAK/QP	Comment	: Y.Tamura
Polarization	: Vertical	Vin=48V	
Power Supply	: DC48V	Io=9A	
Temp.	: 25		
Limit:	[CISPR 11] Class A Group 1<3m>		

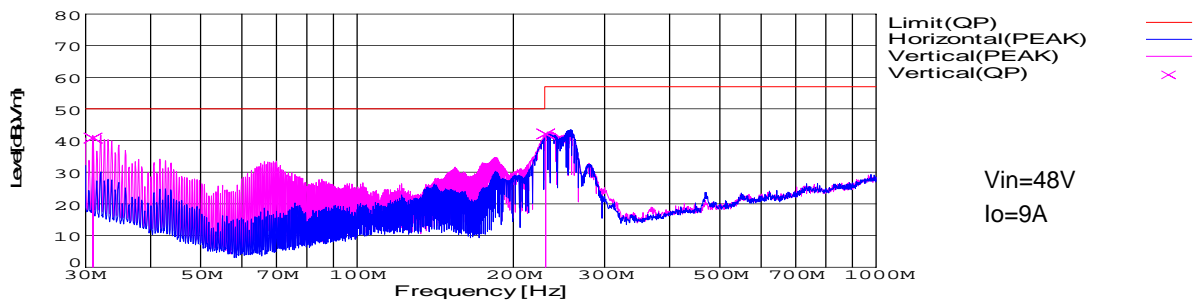

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBμV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
30.997	55.4	BL	17.7	-32.3	40.8	103	100	Vert.	50	9.2
230.886	63.4	BL	9.9	-31.2	42.1	227	103	Vert.	57	14.9

DATA SHEET		Date	31-Jul-06
Model	SFLS30483R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Tamura

1. Line conduction

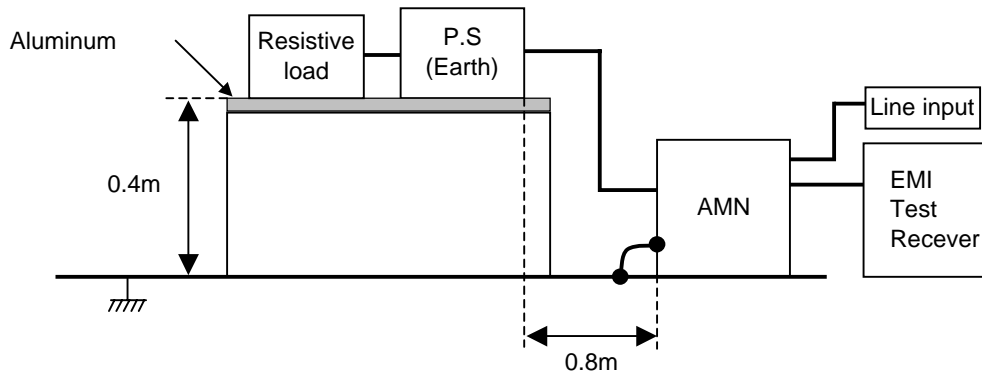

2. Radiated emission

