

**TEST DATA OF TBC-150-□□□****Noise Filter**

June. 20. 2008

Approved by : Toshio Watanabe  
Toshio Watanabe Design Manager

Prepared by : Tadayuki Noda  
Tadayuki Noda Design Engineer

**COSEL CO.,LTD.**





## CONTENTS

1. Attenuation Characteristics .....	1
2. Leakage Current .....	3
3. Figure of Testing Circuitry .....	4

(Final Page 4)




Model	TBC-150-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

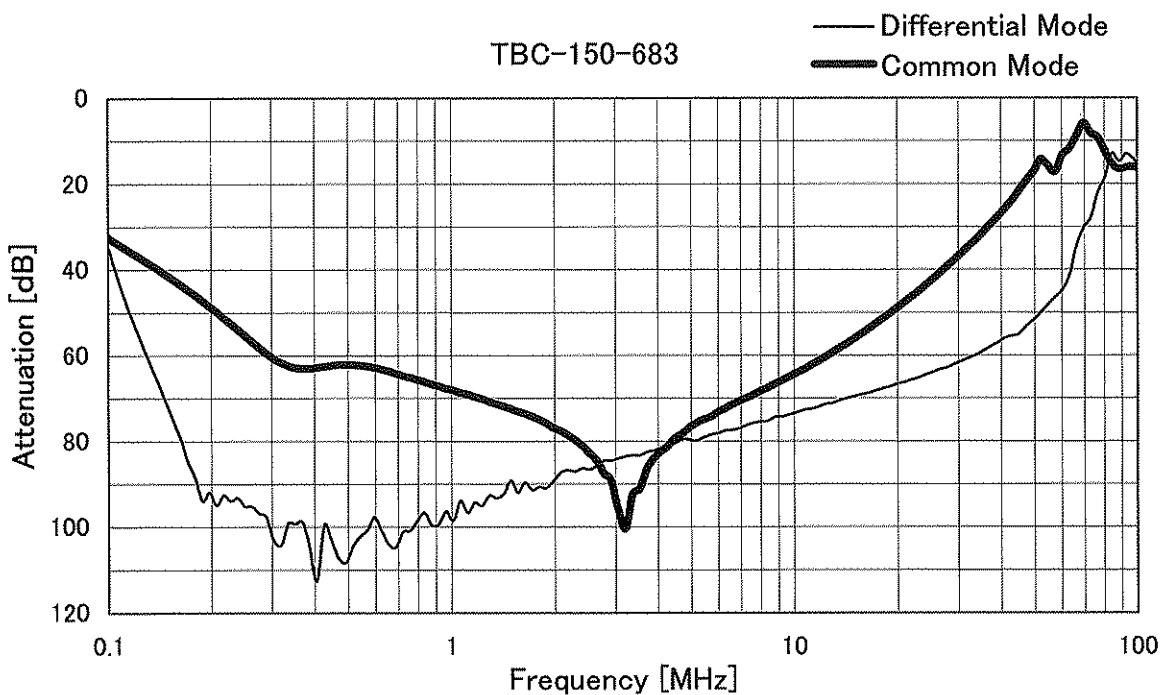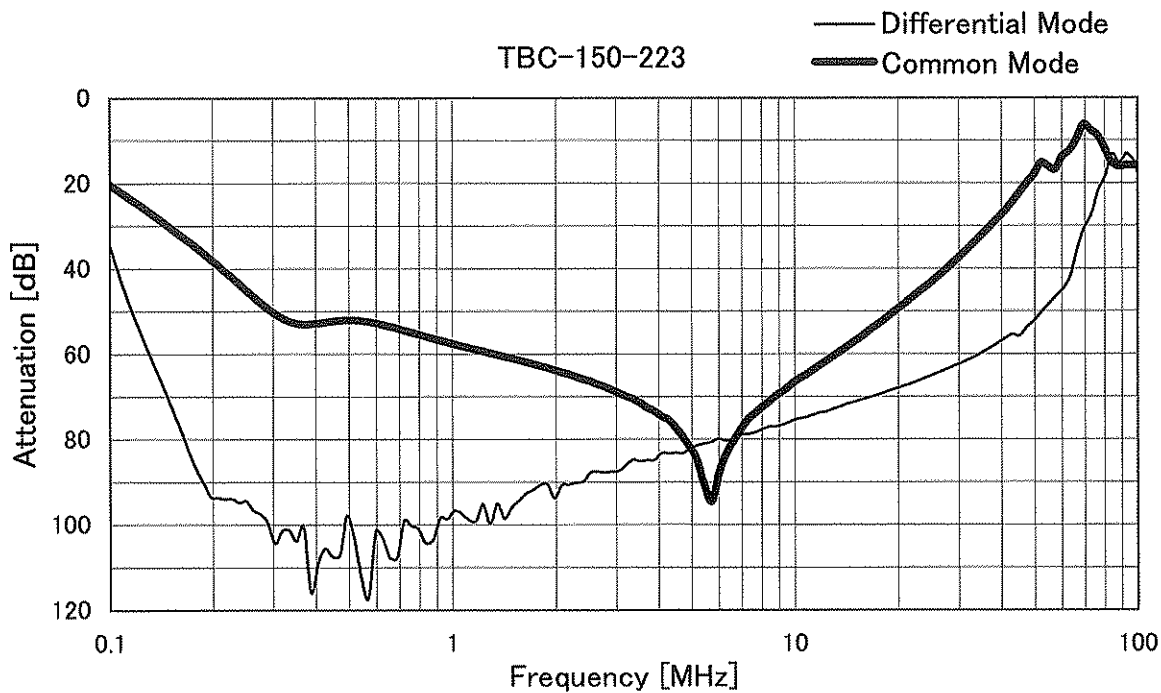



Model	TBC-150-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

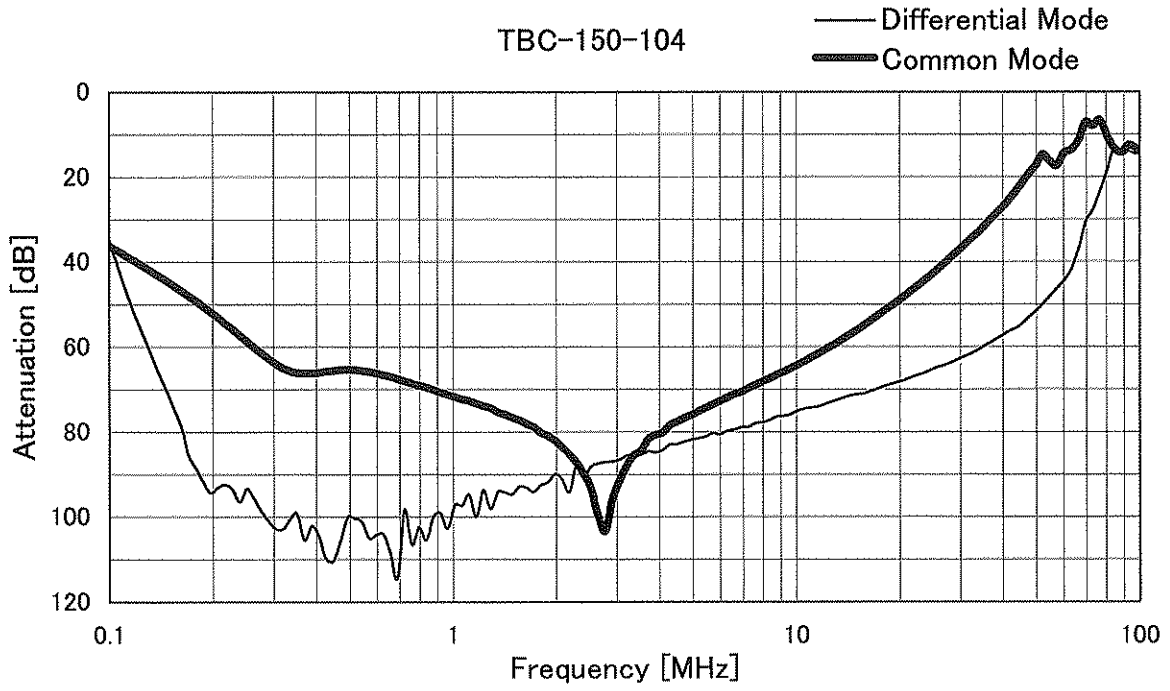



<b>COSEL</b>		
Model	TBC-150-□□□	Temperature 25°C Testing Circuitry Figure B
Item	Leakage Current	
Object	_____	

1.Results

[mA]

Model	Standards	Input Volt.					Note
		200 [V]	250 [V]	400 [V]	480 [V]	500 [V]	
TBC-150-223	UL1283	0.52	0.69	1.2	1.4	1.4	
TBC-150-683	UL1283	1.4	1.8	2.8	3.5	3.6	
TBC-150-104	UL1283	2.1	2.6	4.3	5.1	5.3	

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

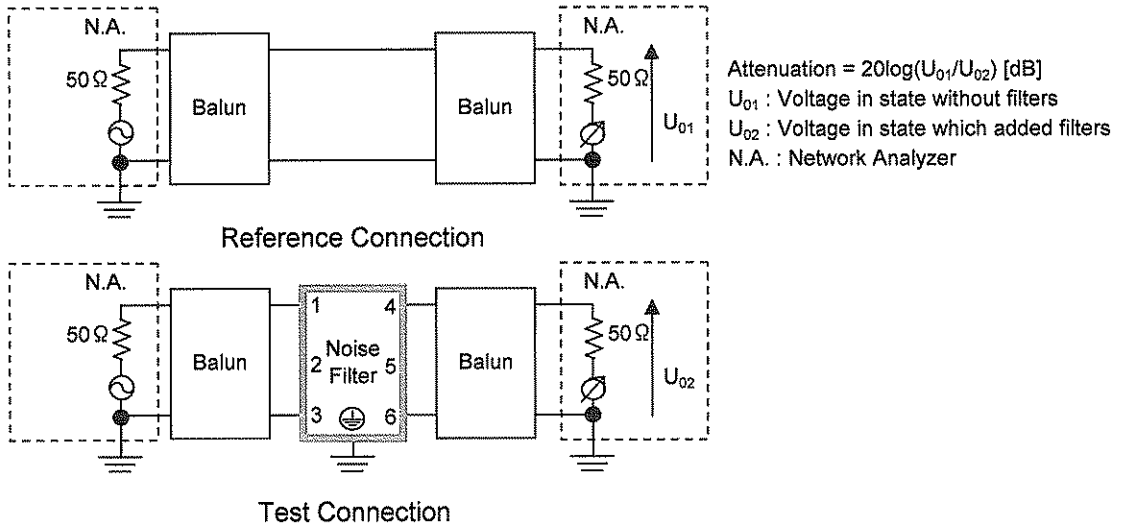


Figure A - 1 Differential mode attenuation measurement

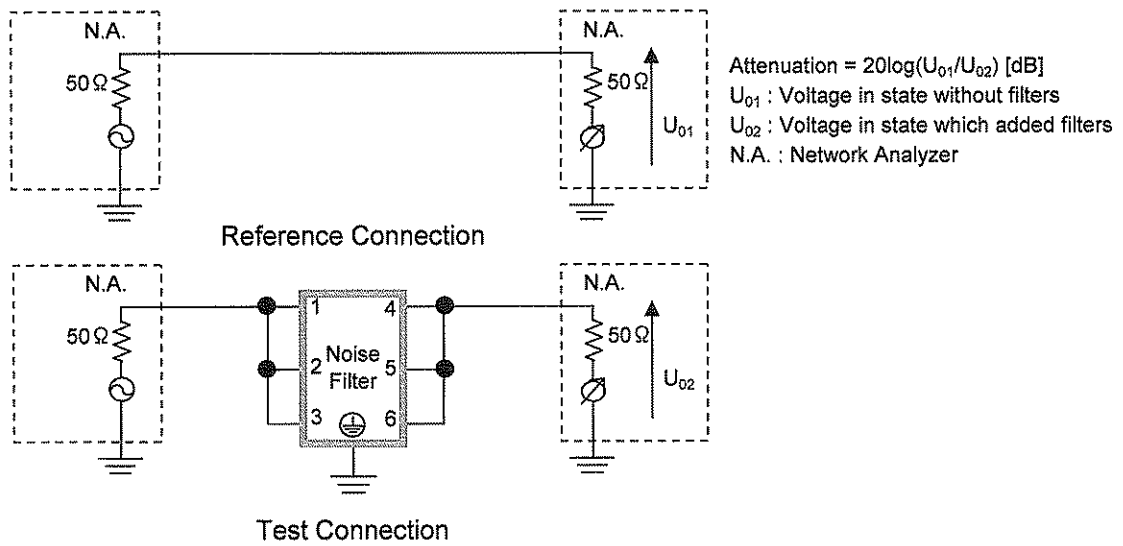


Figure A - 2 Common mode attenuation measurement

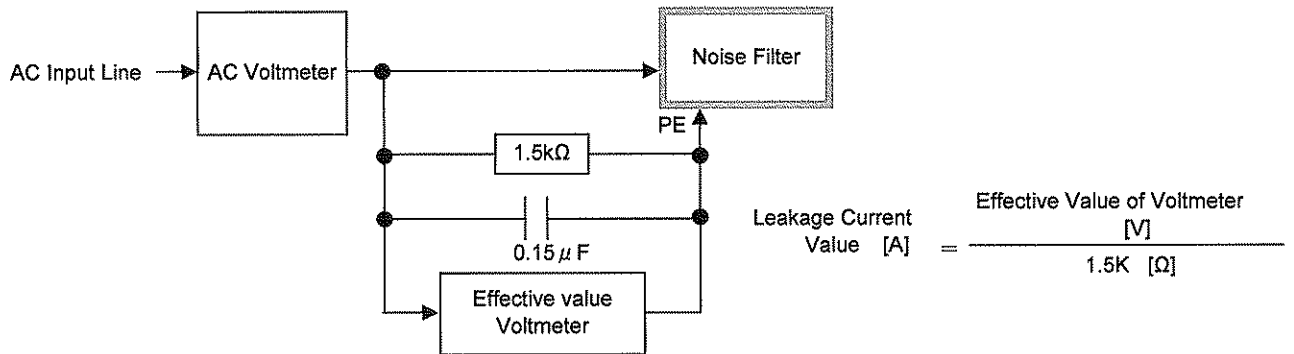


Figure B Leakage current measurement ( UL1283 )