



*****COSMOS Corp.*****
<<< Radiated Emission >>>

6 January, 1998 11:14
Page 1

Model : UAW500S-3
Serial No. : None
Standard : EN55022 Class A 30m
Condition File : 30m
Condition : Operated
Remarks :
:
:
AC Power : 230 V 50 Hz
Temperature : 12 deg.
Humidity : 34 %
Operator : H. Wakabayashi

----- Final Result -----

- Vertical Polarization -

No.	Frequency [MHz]	Reading [dBuV]	c.f. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1	36.002	39.8	-13.0	26.8	30.0	3.2
2	37.659	38.7	-13.8	24.9	30.0	5.1
3	49.163	41.0	-19.7	21.3	30.0	8.7


COSMOS Corp.
EMC Labo.





<<< Radiated Emission >>>





Date/Time: 6 January, 1998 11:14





Model : UAW500S-3
Serial No. : None
Remarks :

Standard : EN55022 Class A 30m
Operator : H. Wakabayashi

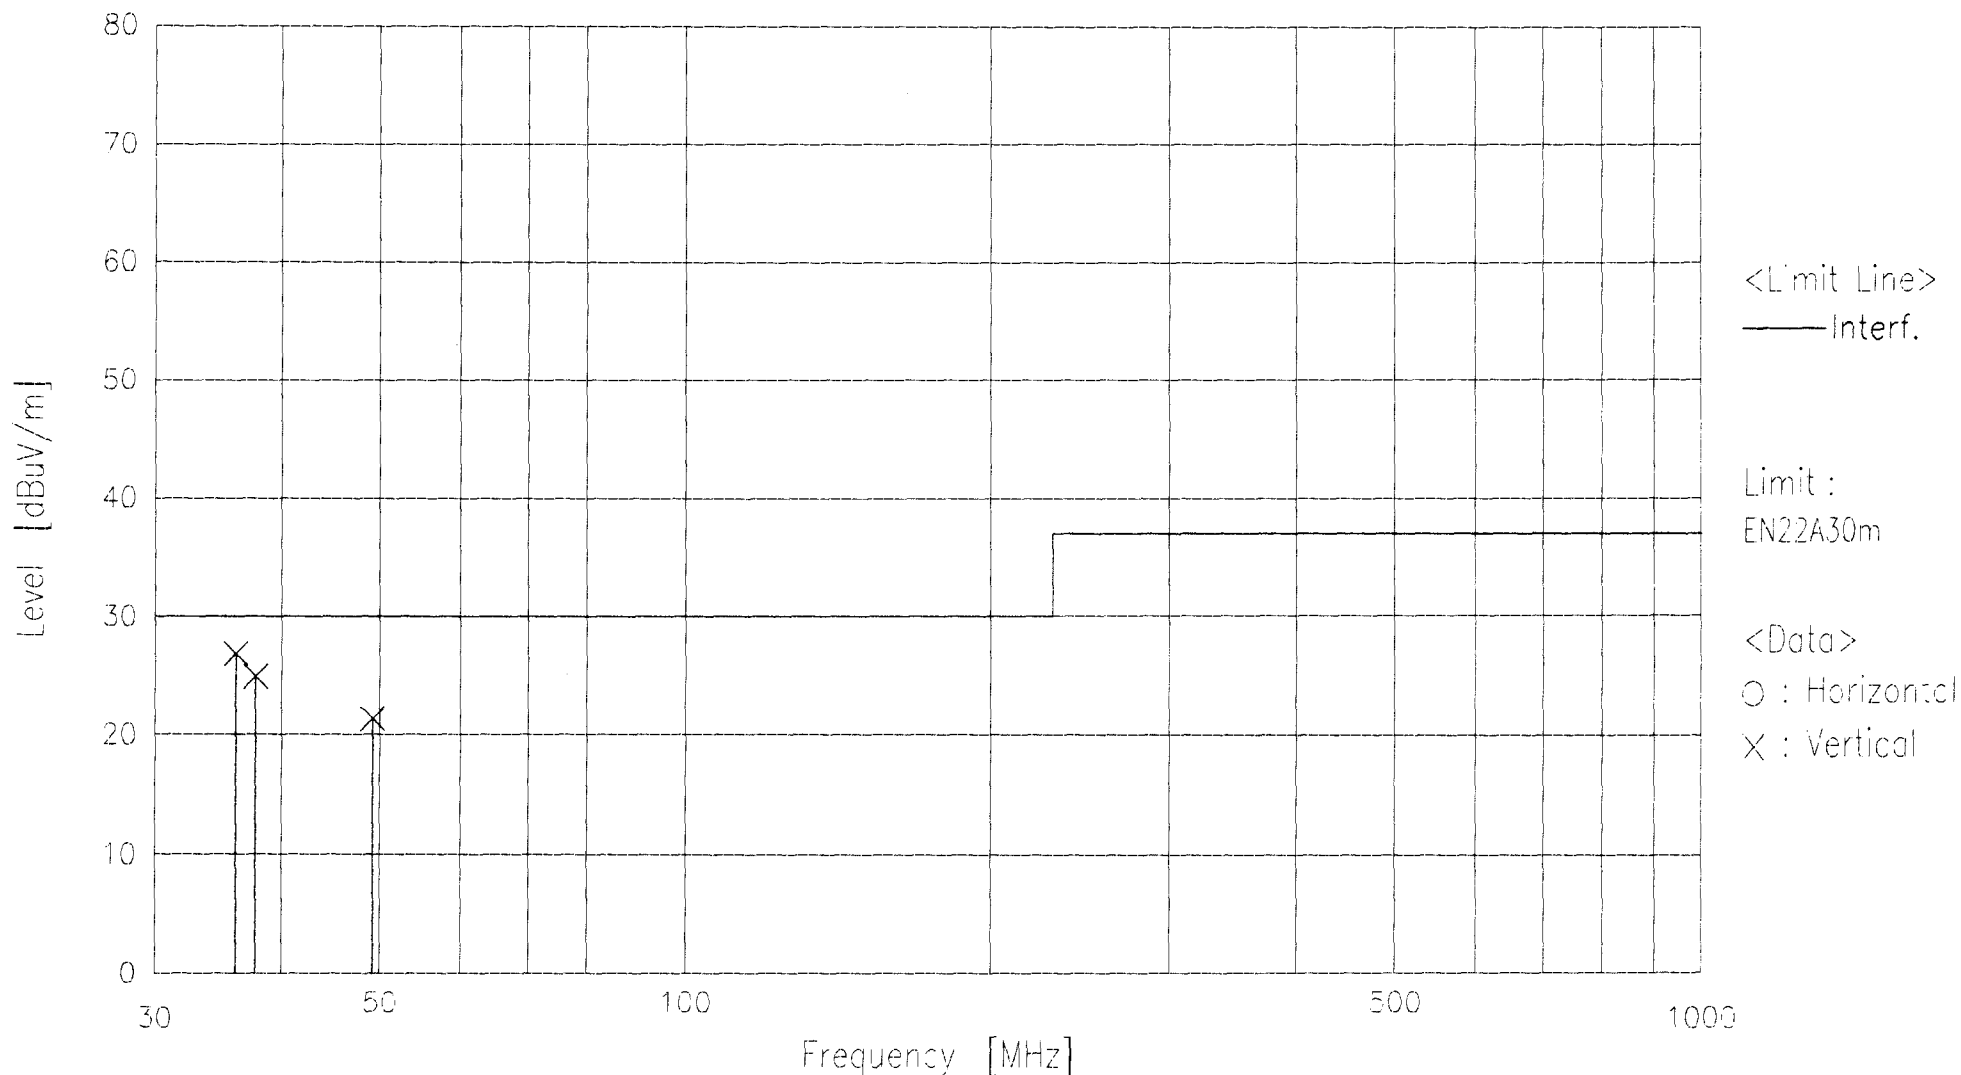

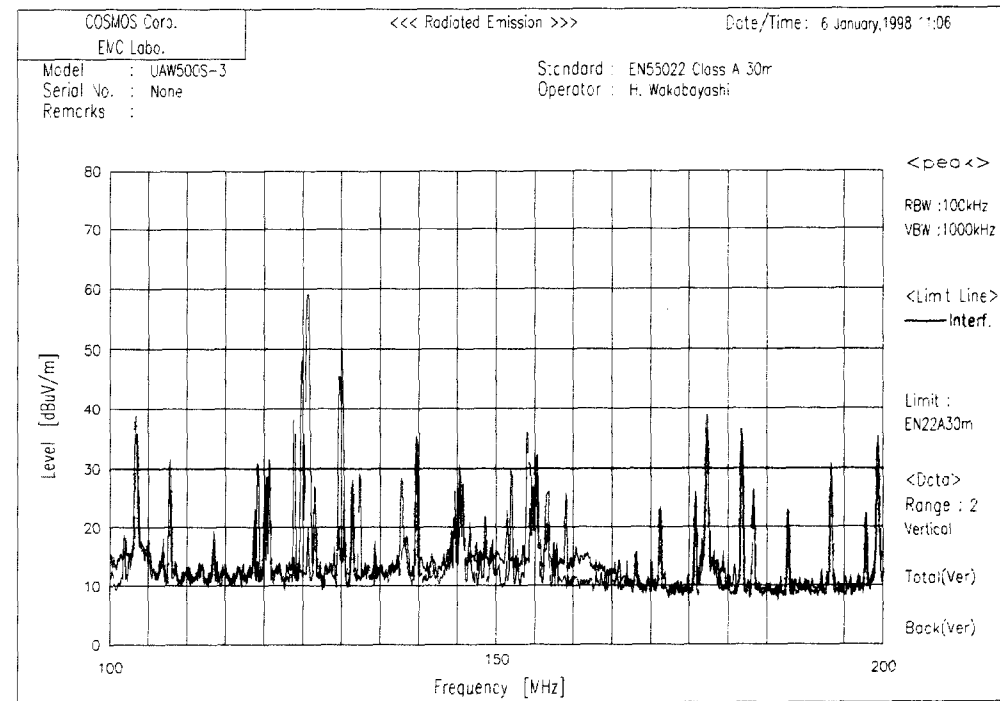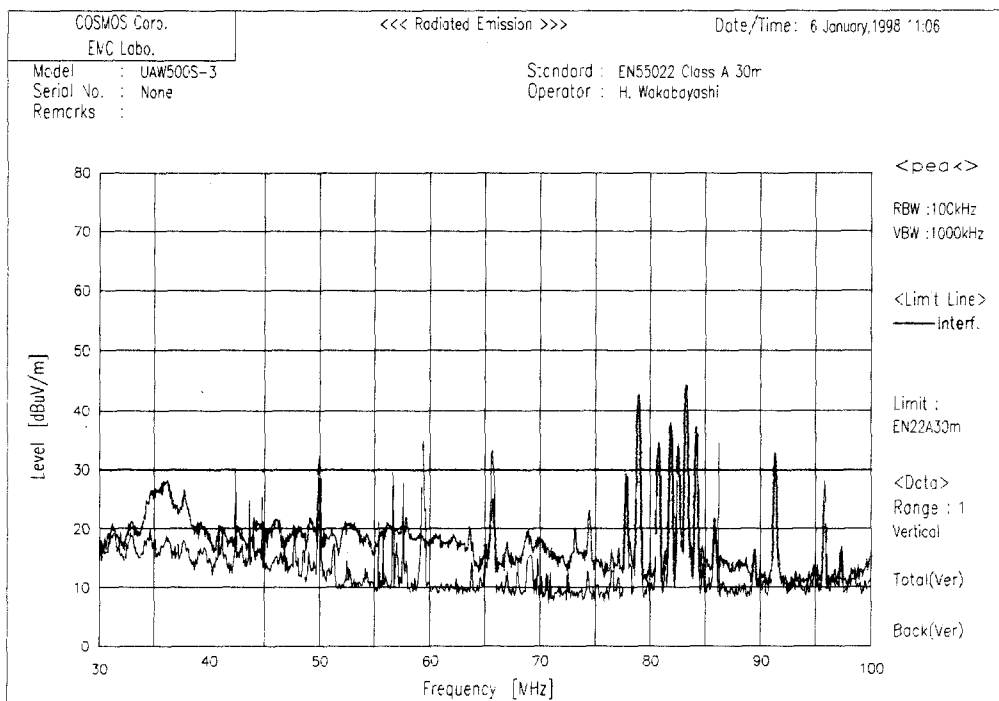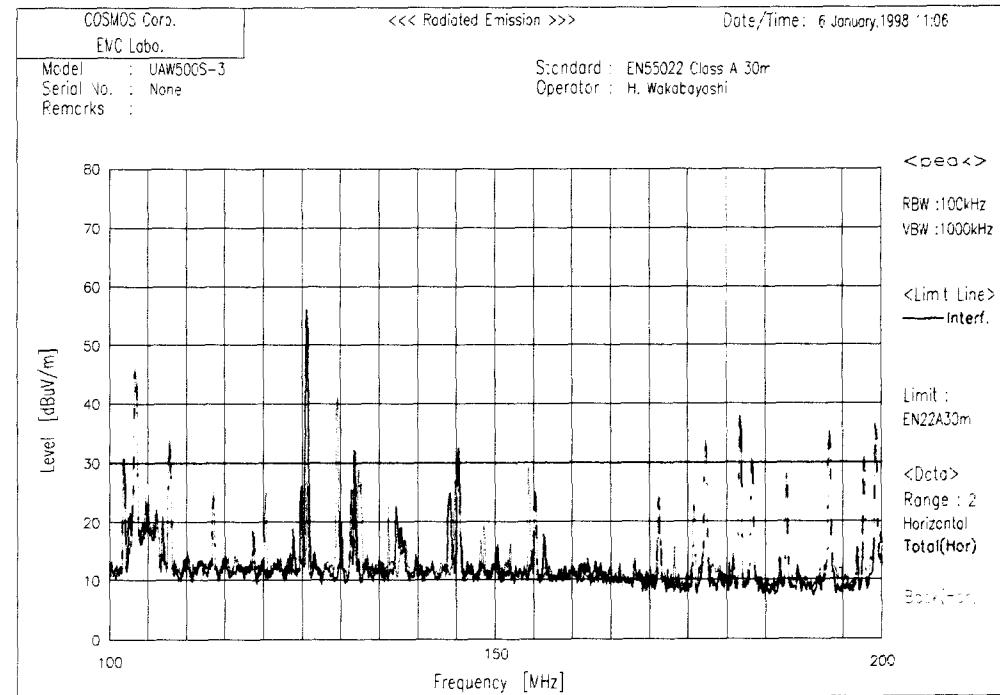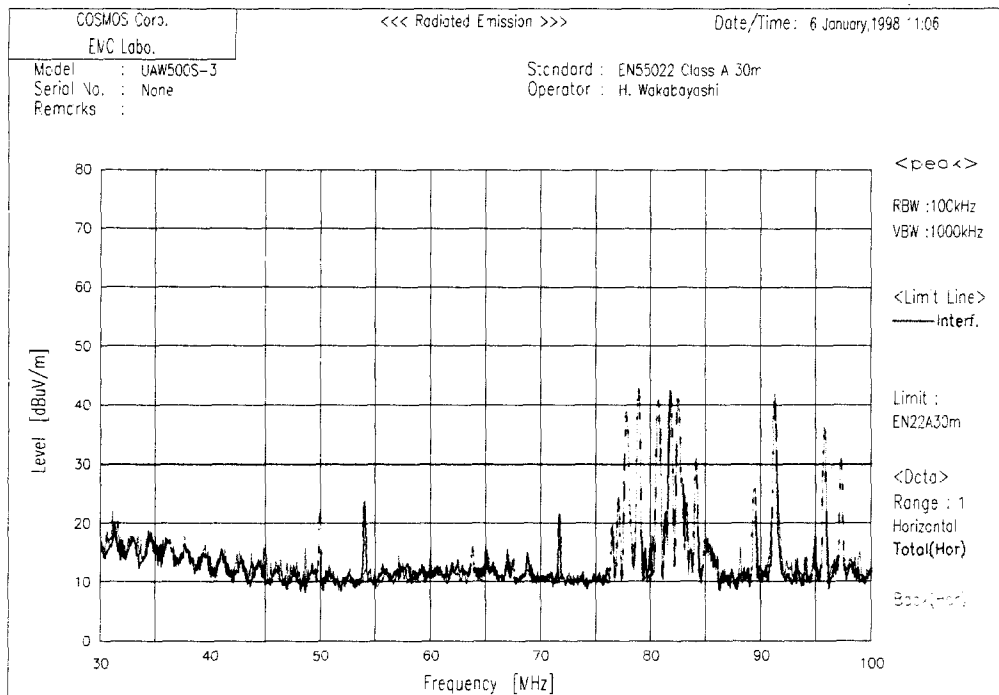

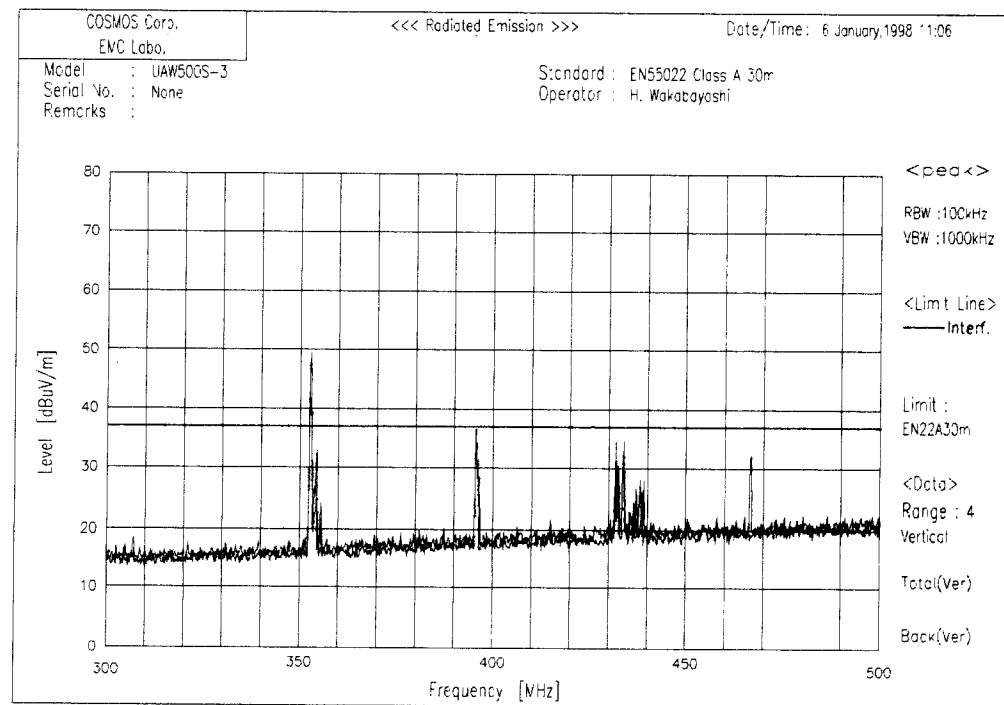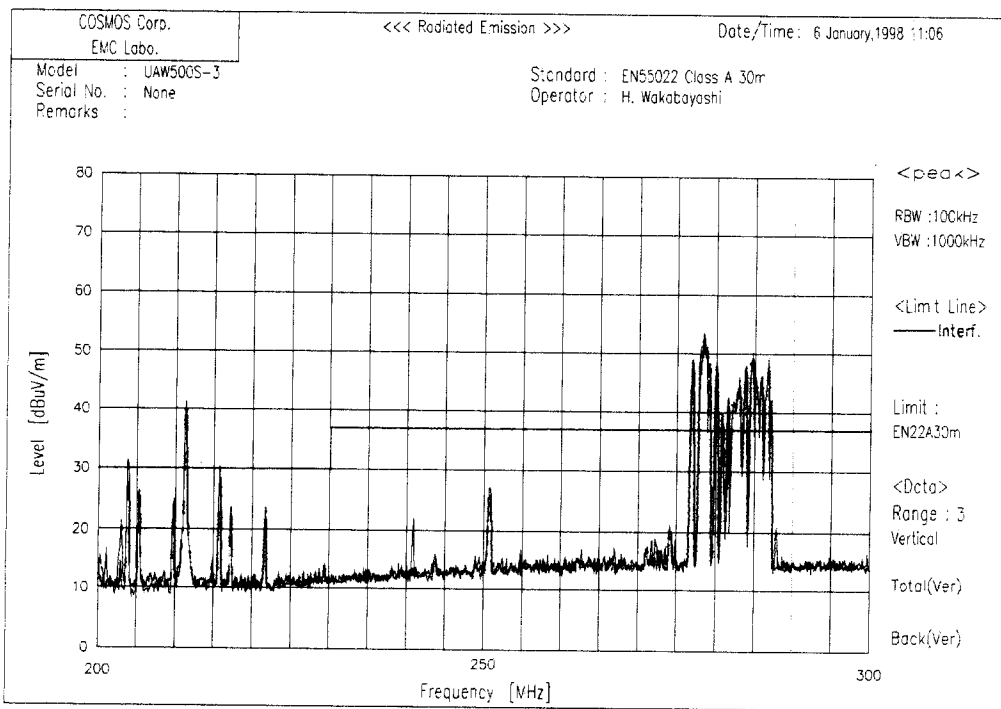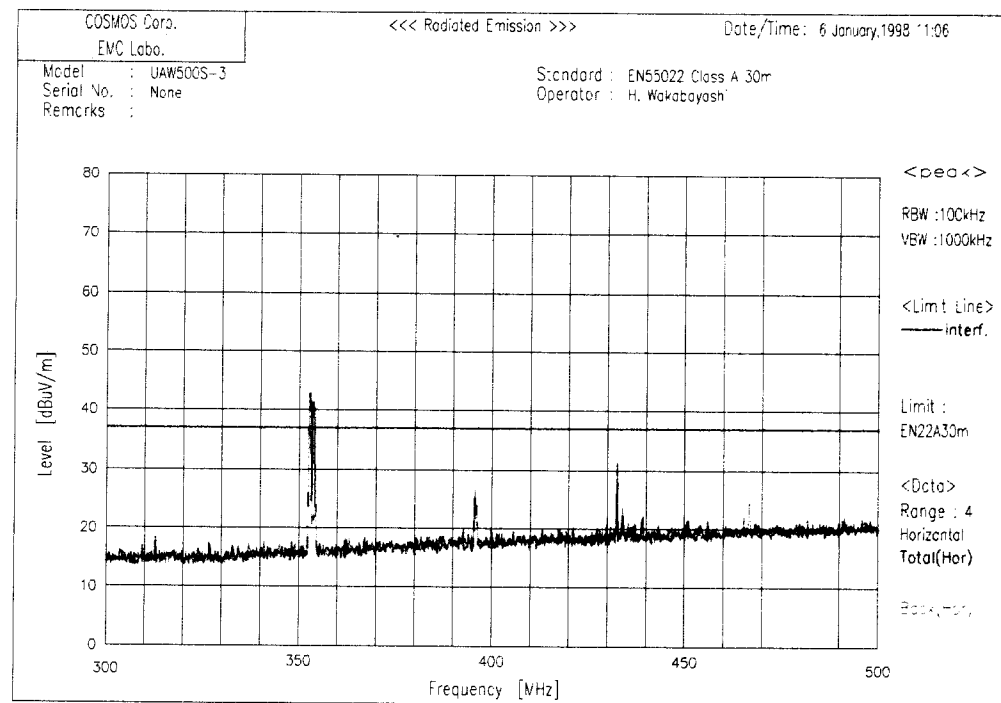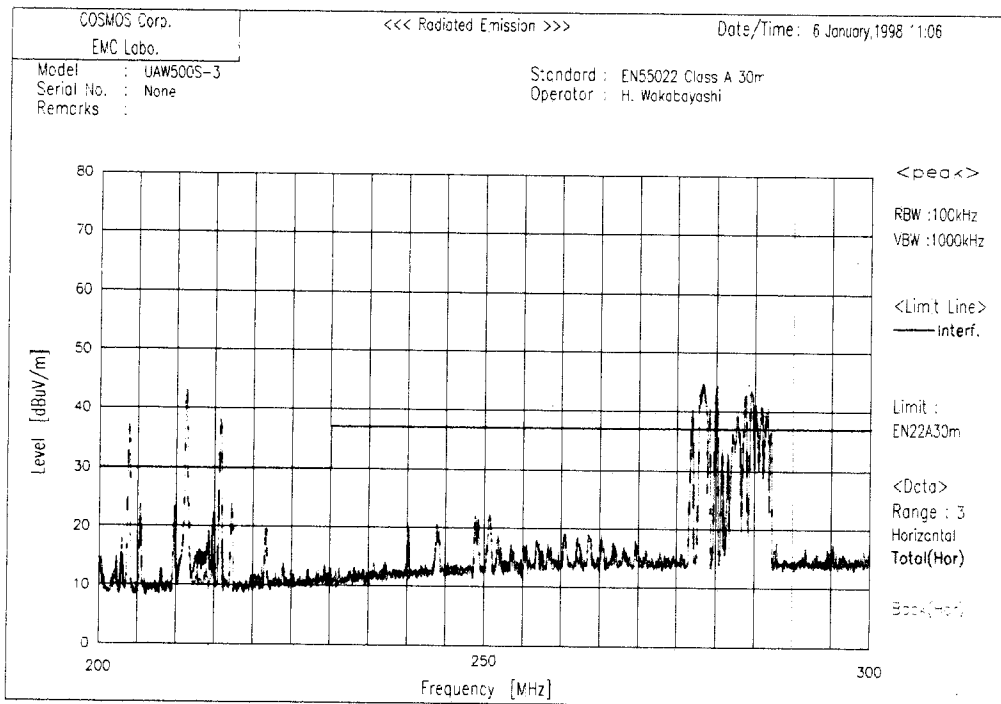

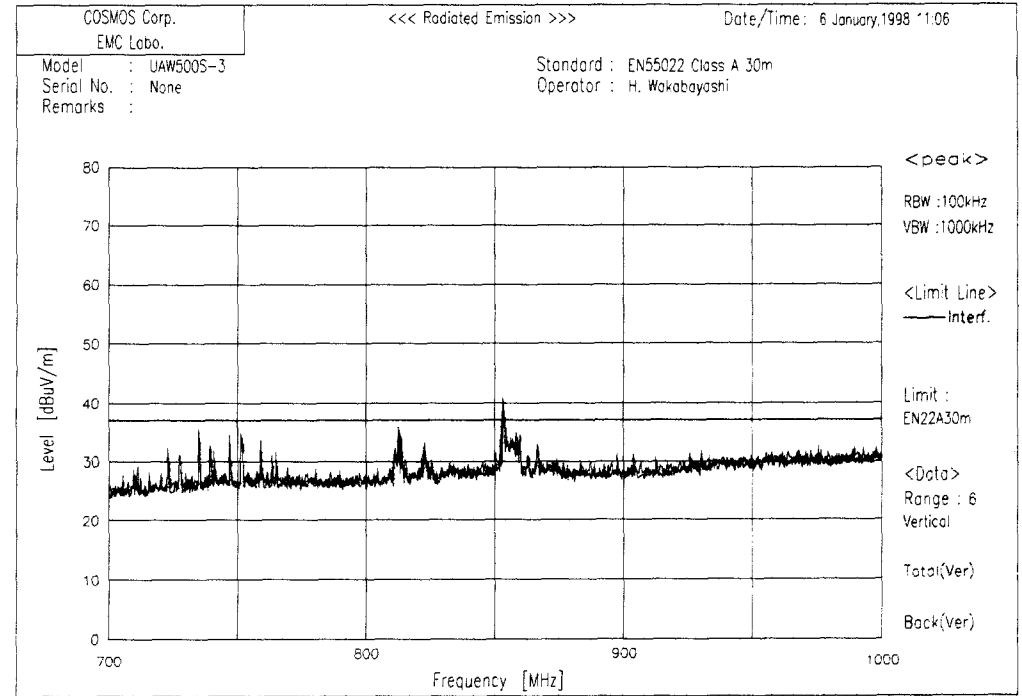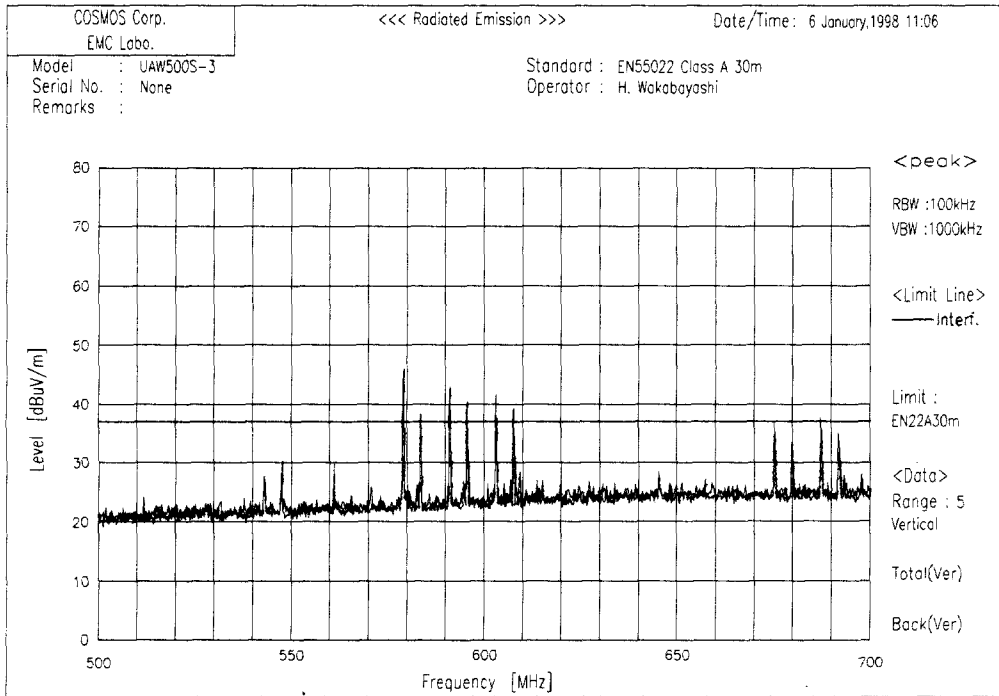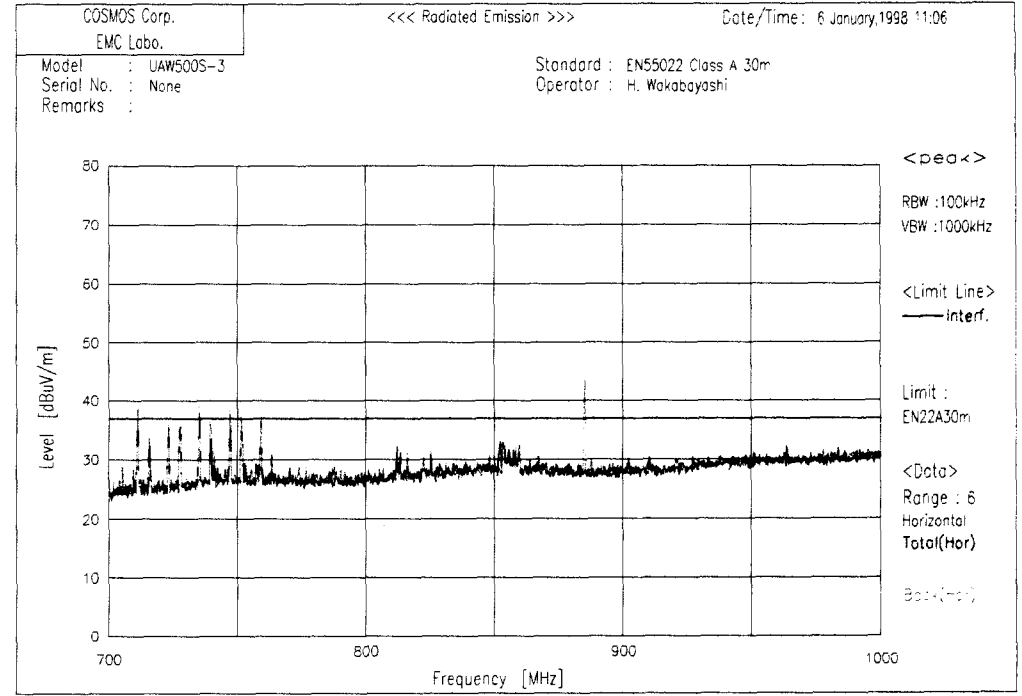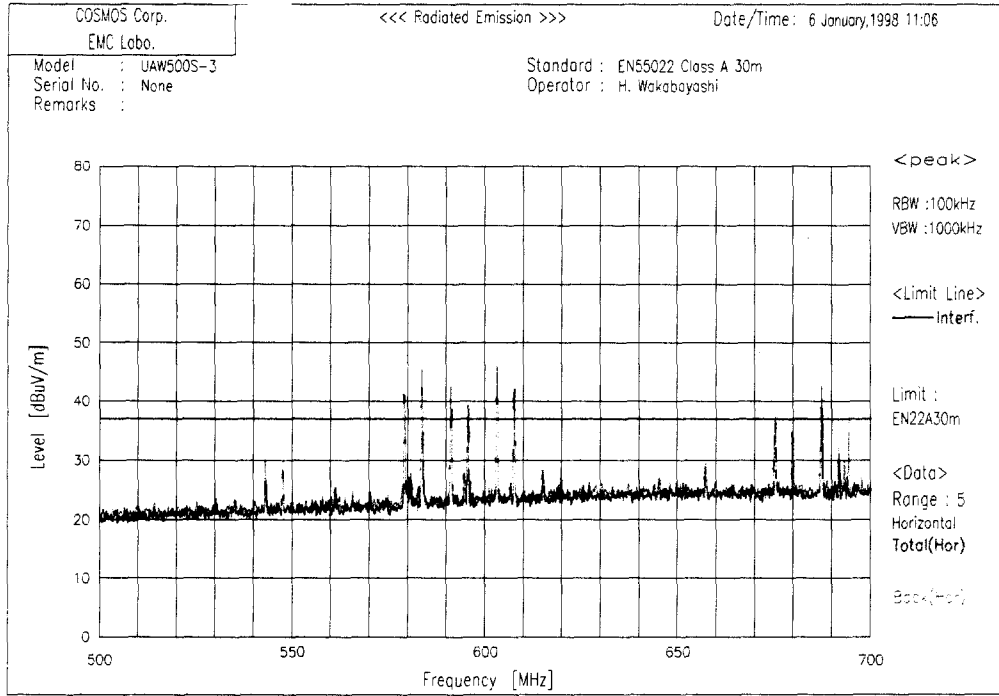

***** Cosmos Corp. *****

<<< Conducted Emission >>>

11 December, 1996 18:07

Page 1

Model : UAW500S-3
 Serial No. : 5351937
 Standard : EN55022 Class B
 Condition File : EN55022
 Remark : Operated
 :
 :
 :
 AC Power : 230 V 50 Hz
 Temperature : 13 deg.
 Humidity : 60 %
 Operator : H.Wakabayashi

----- Results -----

No.	Frequency [MHz]	Reading		c.f. [dB]	Result		Limit		Margin	
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]
Phase N										
1	0.17384	49.3	43.9	9.9	59.2	53.8	64.8	54.8	5.6	1.0
2	0.34564	34.4	32.3	9.8	44.2	42.1	59.1	49.1	14.9	7.0
3	0.51546	24.6	22.2	10.0	34.6	32.2	56.0	46.0	21.4	13.8
4	1.04773	-3.2	-8.1	9.9	6.7	1.8	56.0	46.0	49.3	44.2
5	2.13107	-3.2	-8.1	9.9	6.7	1.8	56.0	46.0	49.3	44.2
6	8.30129	23.7	22.7	10.3	34.0	33.0	60.0	50.0	26.0	17.0
7	18.67545	22.1	20.7	10.5	32.6	31.2	60.0	50.0	27.4	18.8
8	25.41520	22.1	17.9	10.5	32.6	28.4	60.0	50.0	27.4	21.6

***** Cosmos Corp. *****

<<< Conducted Emission >>>

11 December, 1996 18:18

Page 1

Model : UAW500S-3
 Serial No. : 5351937
 Standard : EN55022 Class B
 Condition File : EN55022
 Remark : Operated
 :
 :
 :
 AC Power : 230 V 50 Hz
 Temperature : 13 deg.
 Humidity : 60 %
 Operator : H.Wakabayashi

----- Results -----

No.	Frequency [MHz]	Reading		c.f. [dB]	Result		Limit		Margin	
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]
Phase L1										
1	0.17430	49.1	43.3	9.9	59.0	53.2	64.8	54.8	5.8	1.6
2	0.34717	34.0	31.2	9.8	43.8	41.0	59.0	49.0	15.2	8.0
3	0.51773	27.3	23.2	10.0	37.3	33.2	56.0	46.0	18.7	12.8
4	1.21651	4.0	-1.2	9.9	13.9	8.7	56.0	46.0	42.1	37.3
5	8.12850	21.9	21.2	10.3	32.2	31.5	60.0	50.0	27.8	18.5
6	19.89323	22.0	18.4	10.5	32.5	28.9	60.0	50.0	27.5	21.1
7	25.43200	22.5	19.7	10.5	33.0	30.2	60.0	50.0	27.0	19.8


Cosmos Corp.
EMC Labo.

<<< Conducted Emission >>>

Date: 11 December,1996

Model : UAW500S-3
Serial No. : 5351937
Remarks :

Standard : EN55022 Class B
Operator : H.Wakabayashi

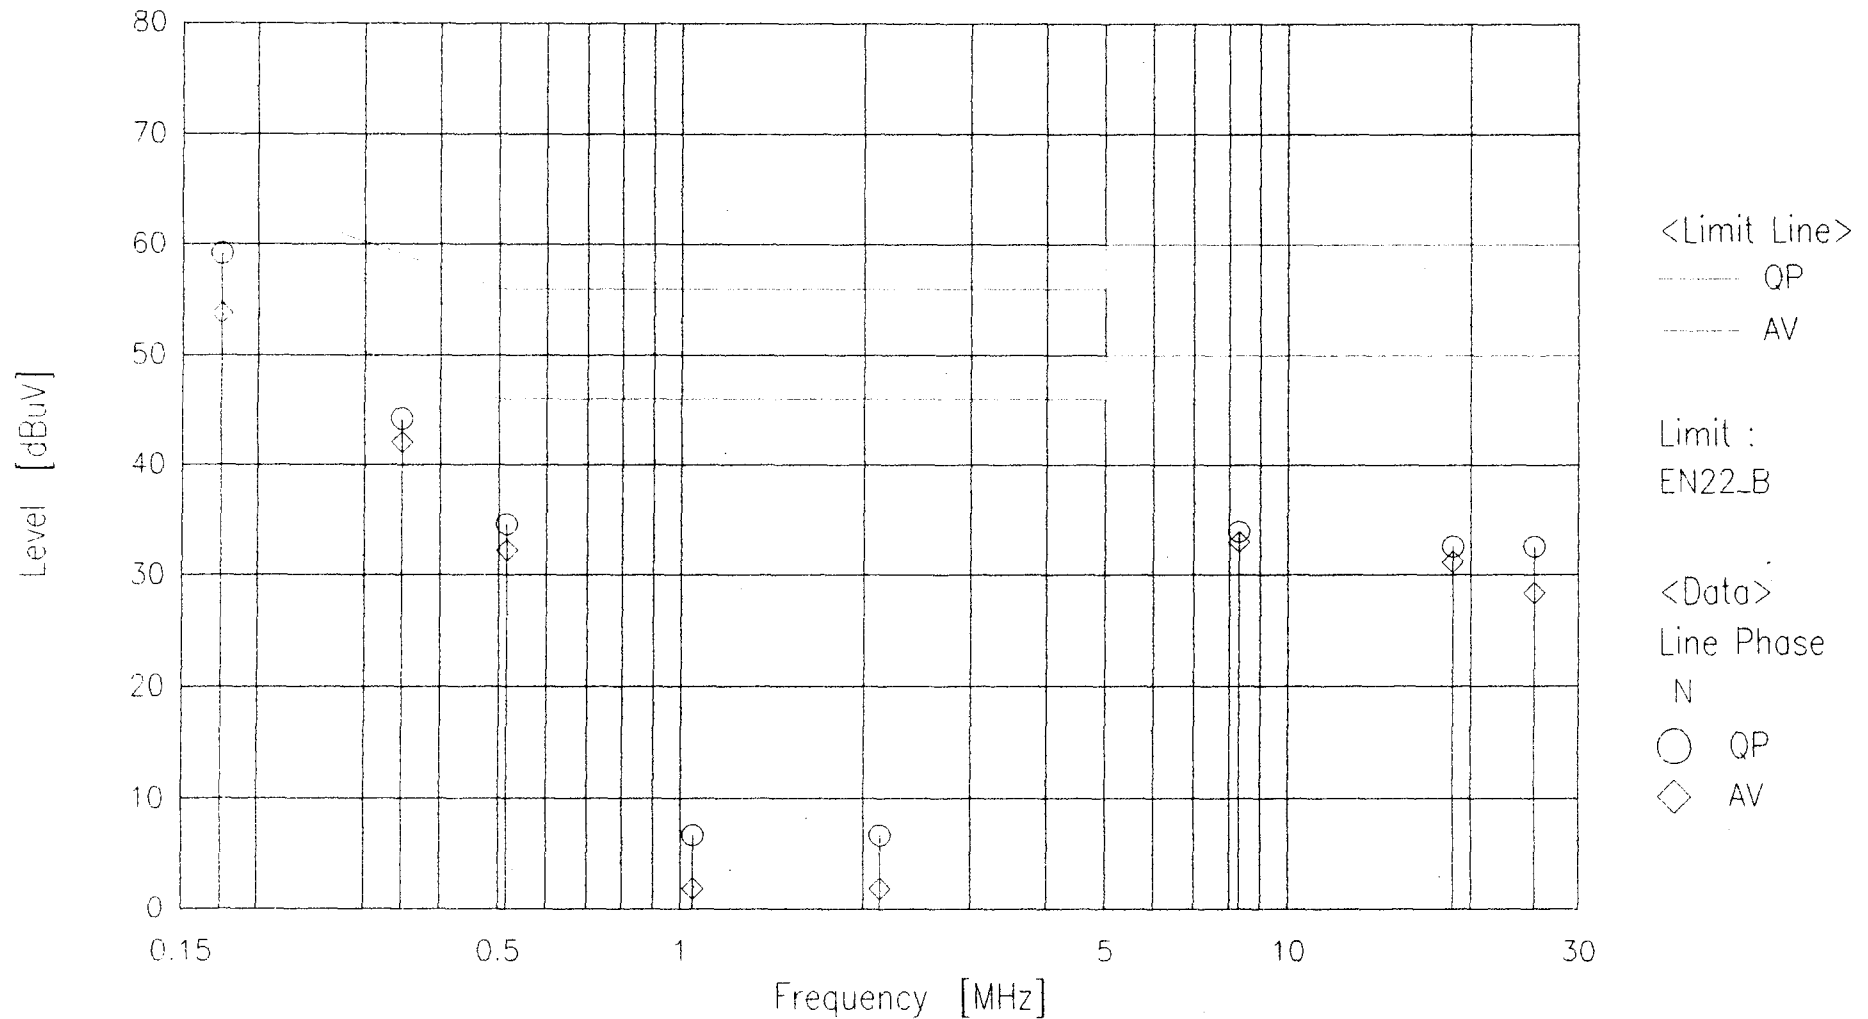


Cosmos Corp.
EMC Labo.

<<< Conducted Emission >>>

Date: 11 December, 1996

Model : UAW500S-3
Serial No. : 5351937
Remarks :

Standard : EN55022 Class B
Operator : H.Wakabayashi

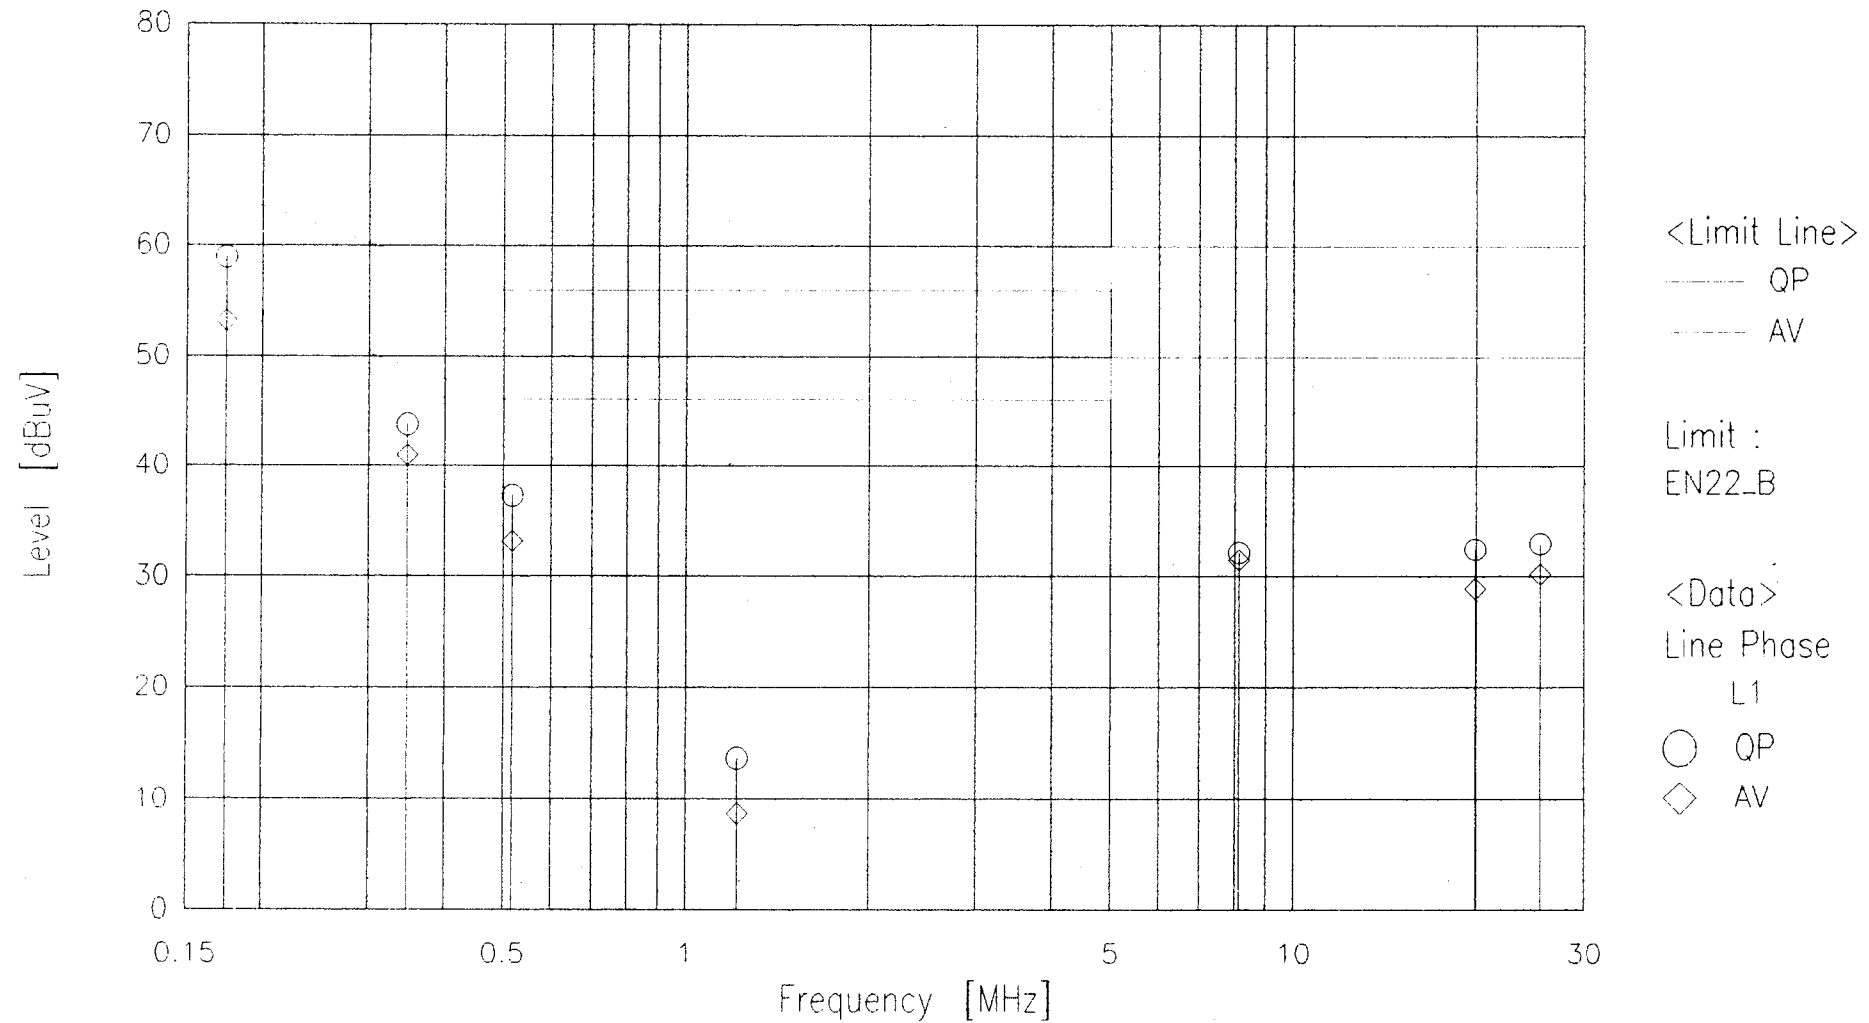


Cosmos Corp.
EMC Labo.

<<< Conducted Emission >>>

Date/Time: 11 December, 1996 17:56

Model : UAW500S-3
Serial No. : 5351937
Remarks :

Standard : EN55022 Class B
Operator : H.Wakabayashi

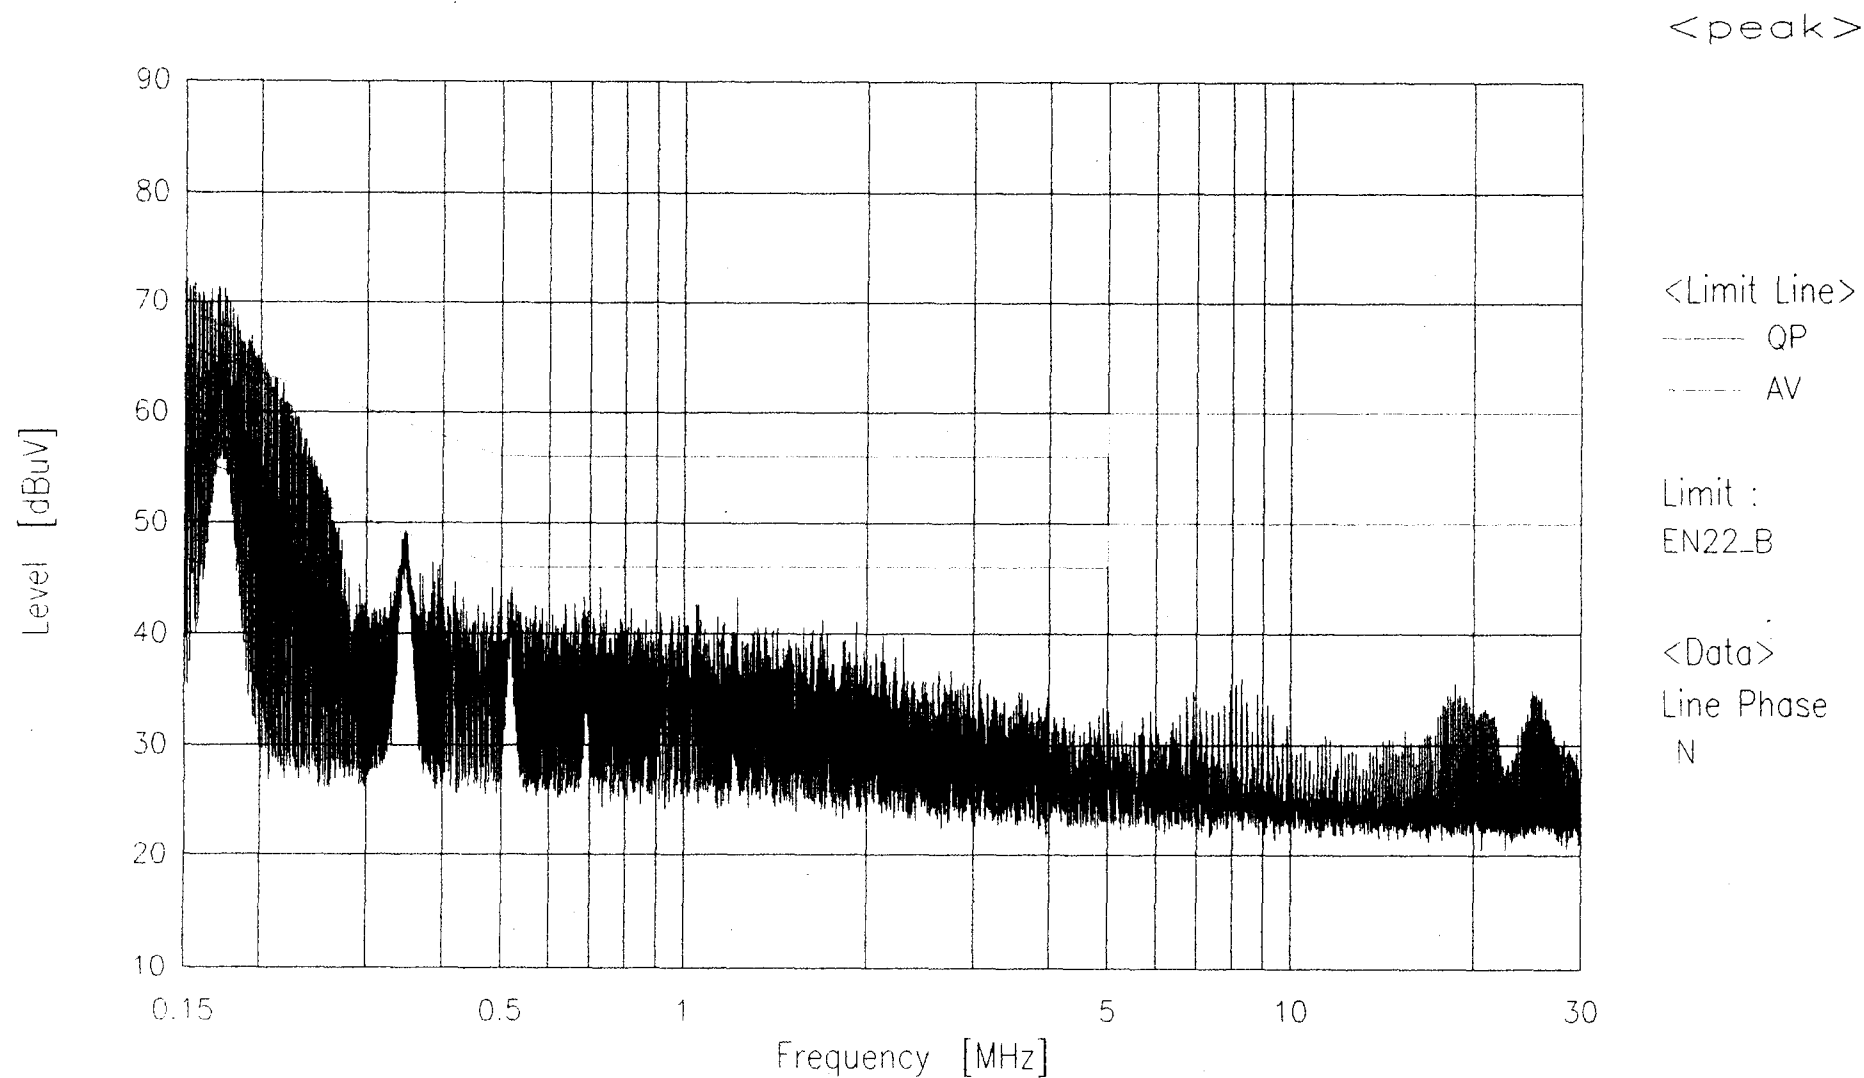

Cosmos Corp.
EMC Labo.

<<< Conducted Emission >>>

Date/Time: 11 December, 1996 18:09

Model : UAW500S-3
Serial No. : 5351937
Remarks :

Standard : EN55022 Class B
Operator : H.Wakabayashi

