



DATA SHEET		Date	13-Mar-19
Model	WXA150H-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kawagishi

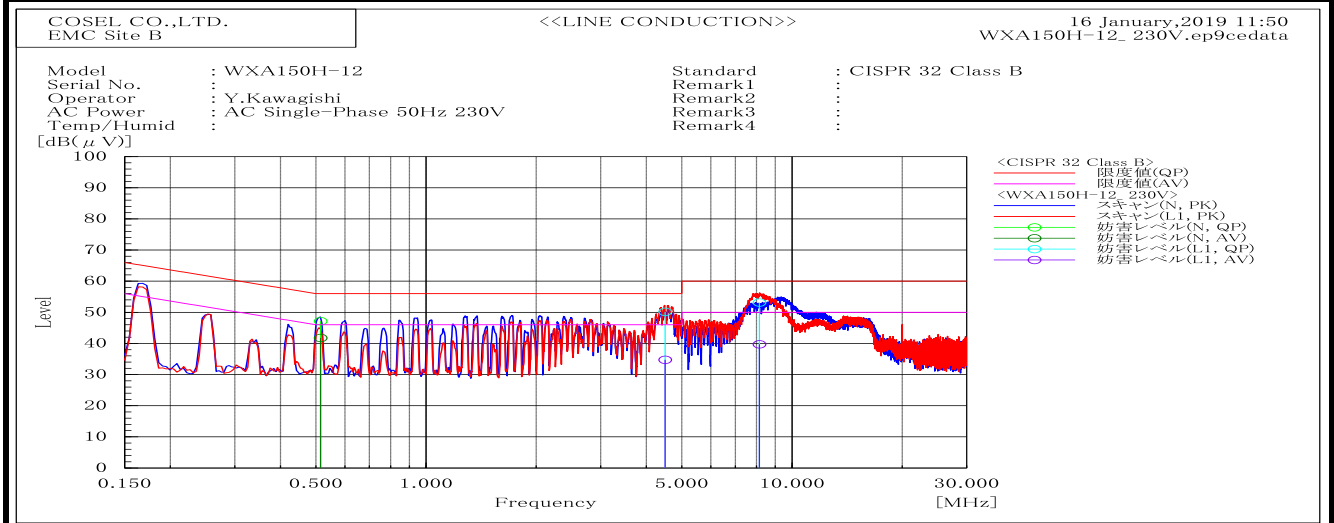


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.515	N	47.2	41.8	56	46	8.8	4.2	Pass	
4.498	L1	50.2	34.8	56	46	5.8	11.2	Pass	
8.143	L1	53.1	39.7	60	50	6.9	10.3	Pass	

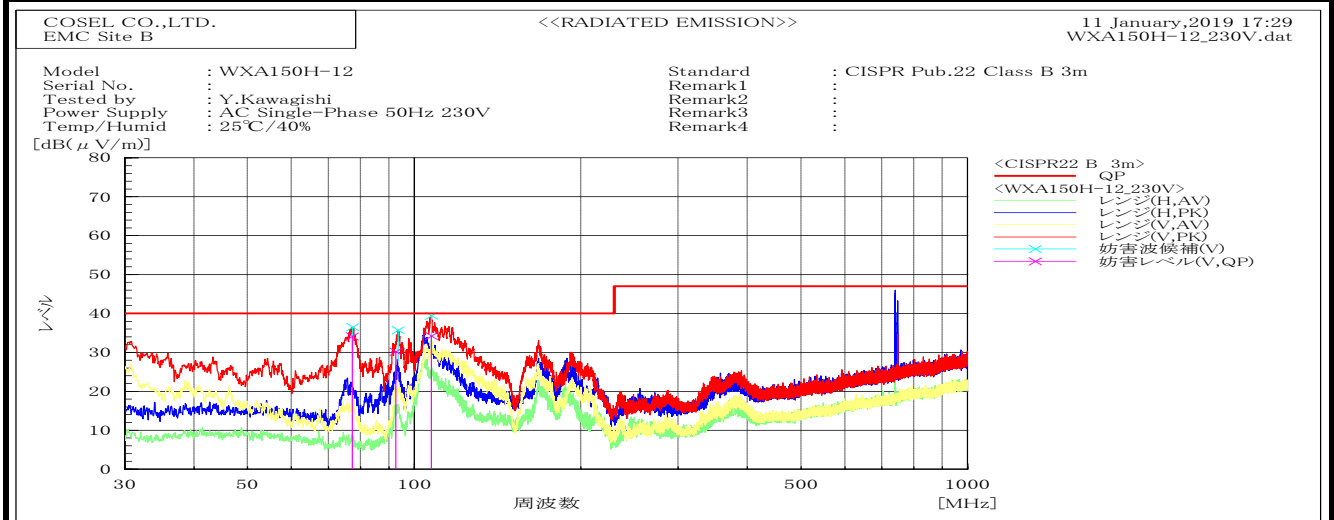

Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
77.249	V	Stable	34.1	40	5.9	Pass	100	76.9	
92.557	V	Stable	30.2	40	9.8	Pass	105.2	29.9	
107.403	V	Stable	34.3	40	5.7	Pass	100	351.8	

DATA SHEET		Date	13-Mar-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kawagishi

1. Line conduction

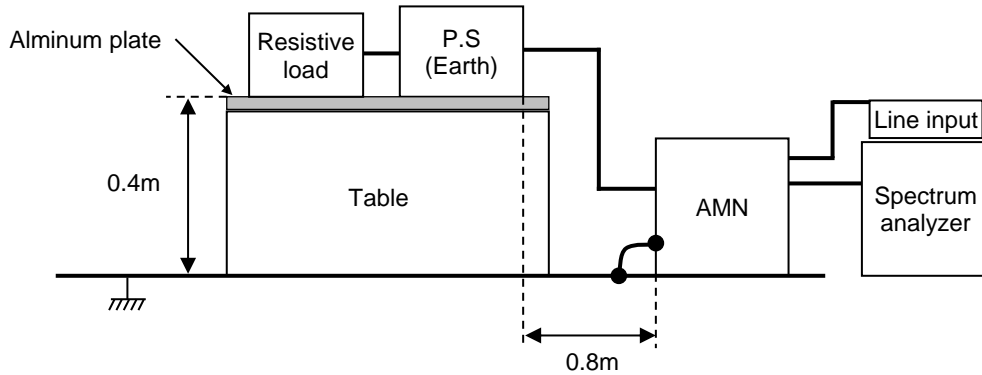

2. Radiated emission

