



DATA SHEET		Date	16-Mar-18
Model	WXA150H-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Nakase

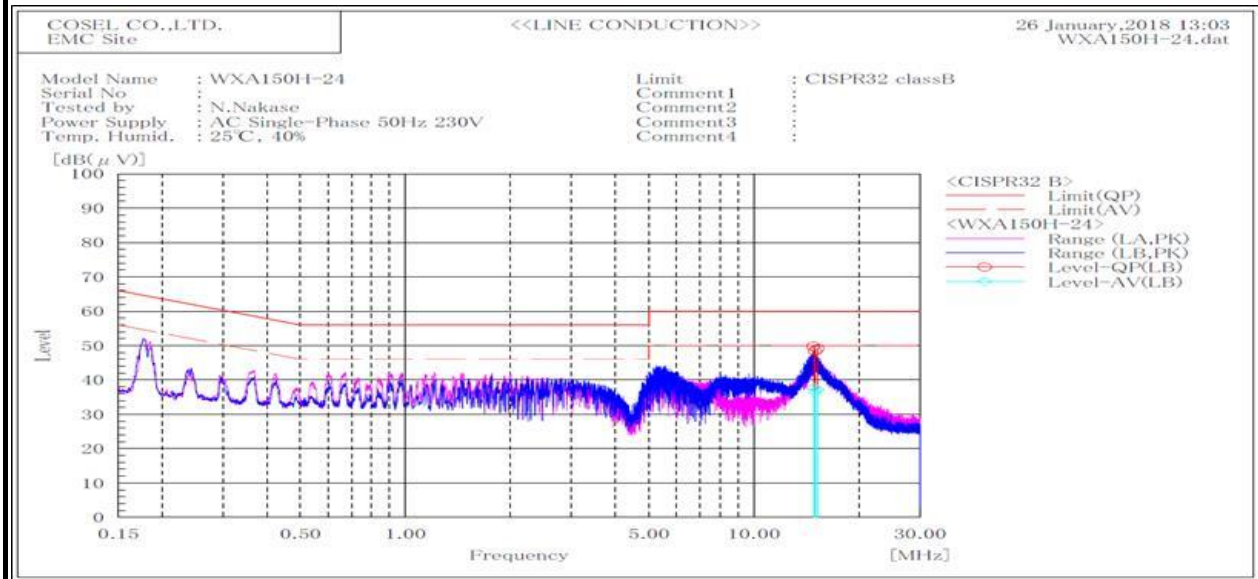


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
14.82620	LB	28.6	16.5	21.2	49.8	37.7	60	50	10.2	12.3	Pass	
14.98845	LB	27.2	15.2	21.2	48.4	36.4	60	50	11.6	13.6	Pass	
15.21900	LB	27.8	16.1	21.2	49.0	37.3	60	50	11.0	12.7	Pass	

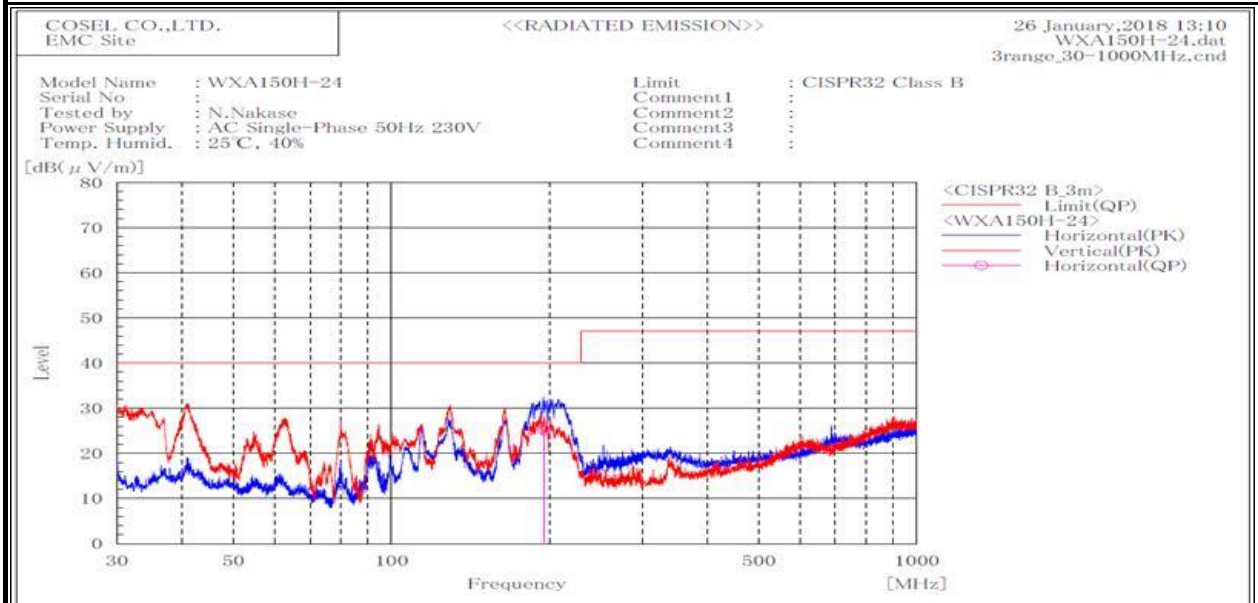


Frequency MHz	Line Phase	Line Phase	Reading dB(uV)	Space Loss	Reading dB(mW)	Limit dB(mW)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
195.62	H	Stable	41.5	-16.4	25.1	40	14.9	Pass	186	352	

DATA SHEET		Date	16-Mar-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Nakase

1. Line conduction

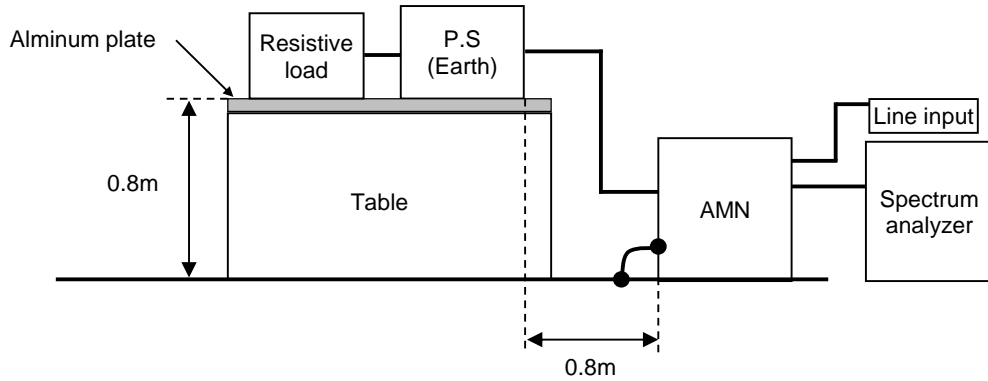

2. Radiated emission

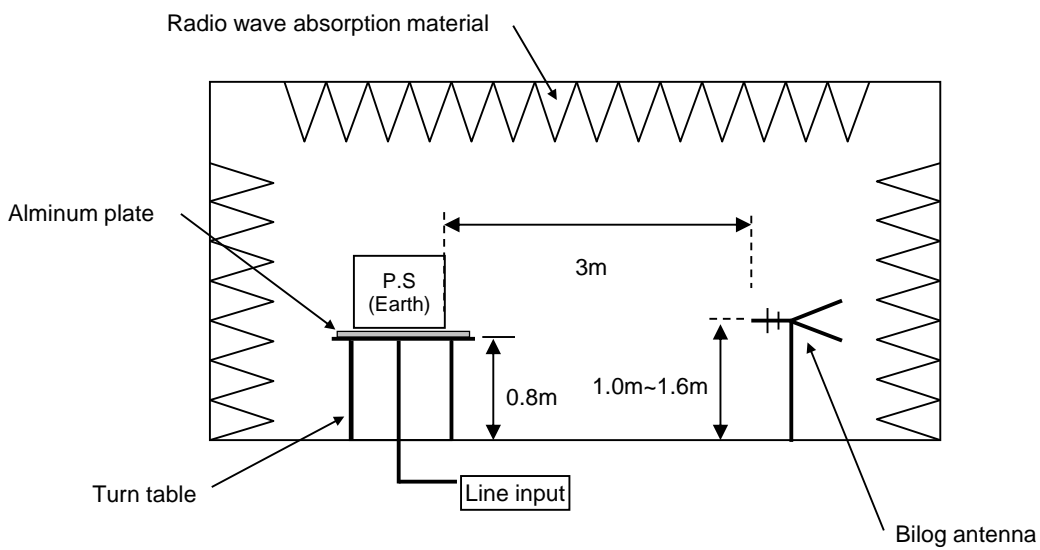

Conditions

Test : EMI
Model Name : WXA150H

O Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

