



DATA SHEET		Date	13-Mar-19
Model	WXA150H-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Kawagishi

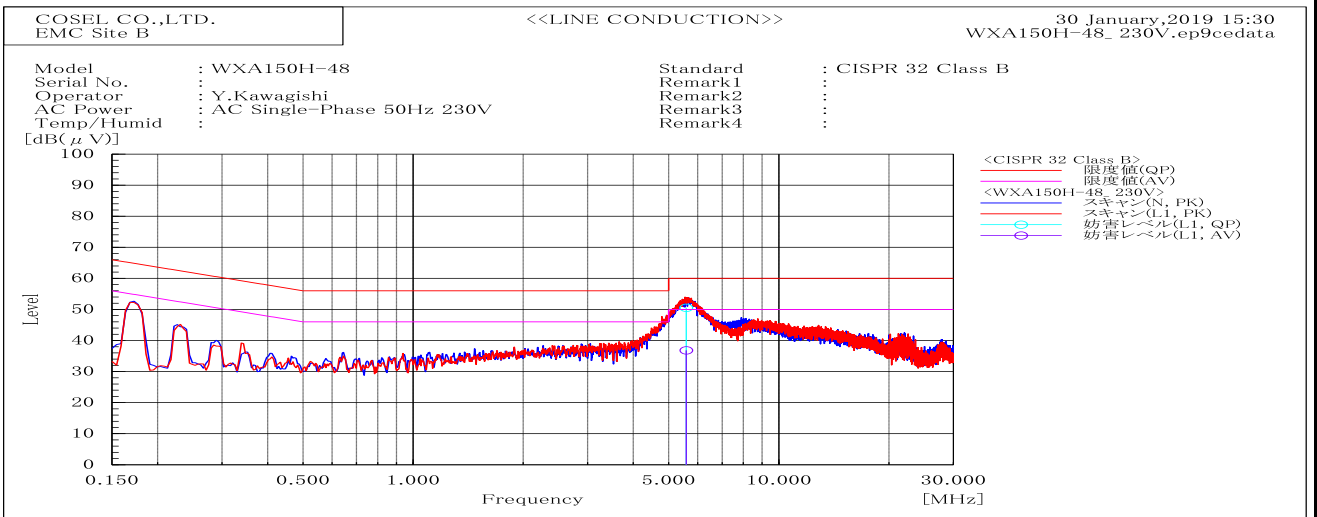


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
5.584	L1	50.5	36.8	60	50	9.5	13.2	Pass	

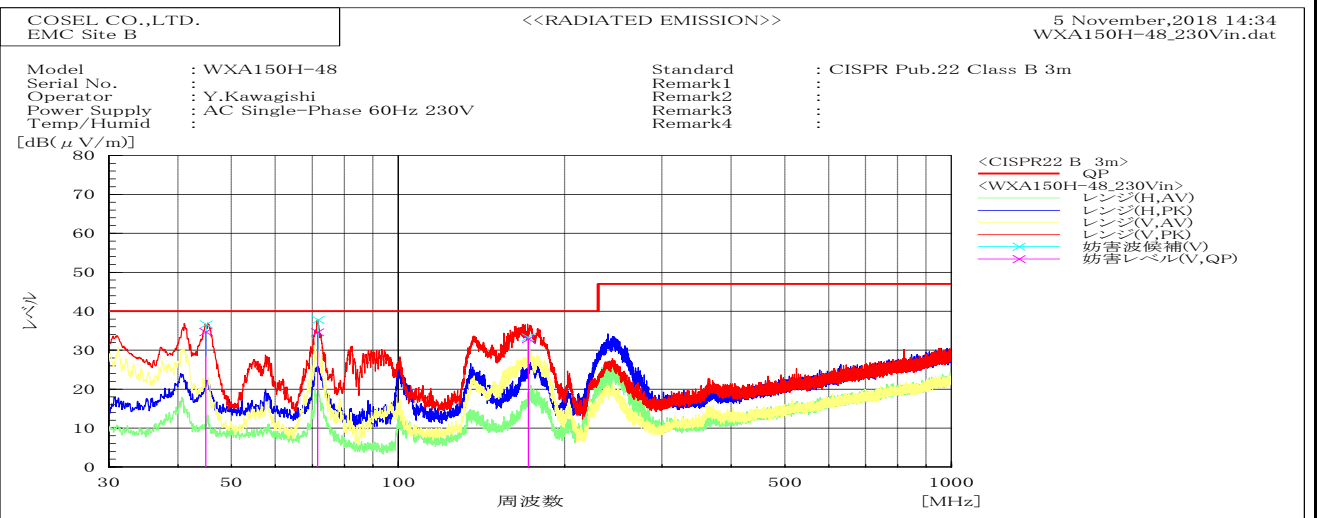

Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
71.492	V	Stable	34.6	40	5.4	Pass	101.4	274.4	
44.883	V	Stable	34.7	40	5.3	Pass	100.2	160.8	
171.884	V	Stable	32.9	40	7.1	Pass	100.4	118.7	

DATA SHEET		Date	13-Mar-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Kawagishi

1. Line conduction

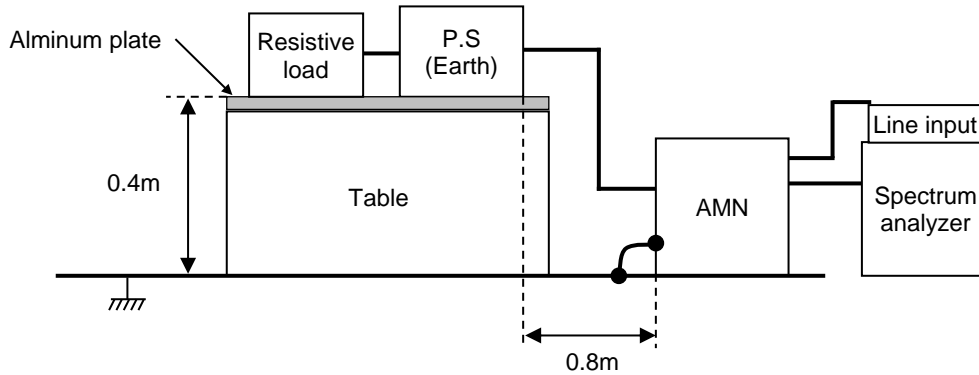

2. Radiated emission

