

Apr.13,2007

Temperature increase of main components: 主要部品温度上昇

Cosel.co.,ltd.


Model: ZUS1524/ZUW1524

1. Conditions

- (1) Input :DC 18 ~ 36 [V]
- (2) Output :Rated output
- (3) Mounting method :Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase ( $\Delta T$ )				Rated temp. [°C]	Reference
			[deg]					
			5V	12V	$\pm 12V$	$\pm 15V$		
1	Transformer	T12	34	40	40	49	120	
2	Switching Transistor	TR16	48	62	58	55	150	Junction Temp.
3	Rectified Diode(Output)	SS71	46	46	47	51	150	Junction Temp.
4	Power Control Ic	IC11	33	32	35	38	125	Junction Temp.
5	Photocoupler	PC11	30	32	35	36	125	Junction Temp.
6	Output Choke	L71	30	35	38	38	120	
7	Output Capacitor	C73	29	32	-	-	125	
8	Output Capacitor	C72,C78	-	-	35	36	125	
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

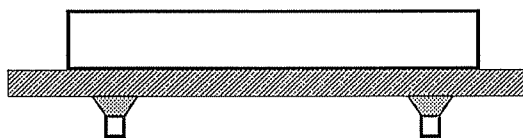

(Side view)

Fig.1.1 Mounting method  
(Normal position)