

Temperature increase of main components: 主要部品温度上昇


Model: ZUS2512/ZUW2512

1. Conditions

- (1) Input :DC 9 ~ 18 [V]
- (2) Output :Rated output
- (3) Mounting method :Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)				Rated temp. [°C]	Reference
			[deg]					
			5V	12V	$\pm 12V$	$\pm 15V$		
1	Transformer	T12	43	50	49	53	120	
2	Switching Transistor	TR16	54	57	51	55	150	Junction Temp.
3	Rectified Diode(Output)	SS71	46	52	47	46	150	Junction Temp.
4	Power Control Ic	IC11	39	40	39	42	125	Junction Temp.
5	Photocoupler	PC11	37	37	39	41	125	Junction Temp.
6	Output Choke	L71	39	47	46	46	120	
7	Output Capacitor	C74	37	38	-	-	125	
8	Output Capacitor	C74,C80	-	-	39	41	125	
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

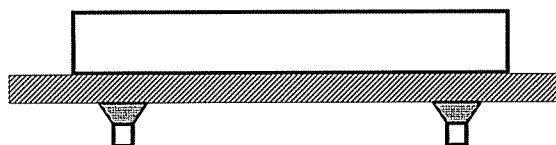

(Side view)

Fig.1.1 Mounting method
(Normal position)