


Model: ZUS2548/ZUW2548

1. Conditions

- (1) Input :DC 36 ~ 75 [V]
- (2) Output :Rated output
- (3) Mounting method :Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)				Rated temp. [°C]	Reference
			[deg]					
			5V	12V	$\pm 12V$	$\pm 15V$		
1	Transformer	T12	39	38	43	39	120	
2	Switching Transistor	TR16	38	38	45	47	150	Junction Temp.
3	Rectified Diode(Output)	SS71	38	37	45	43	150	Junction Temp.
4	Power Control Ic	IC11	31	35	41	41	125	Junction Temp.
5	Photocoupler	PC11	28	36	36	35	125	Junction Temp.
6	Output Choke	L71	34	36	46	38	120	
7	Output Capacitor	C74	28	36	-	-	125	
8	Output Capacitor	C74,C80	-	-	38	35	125	
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

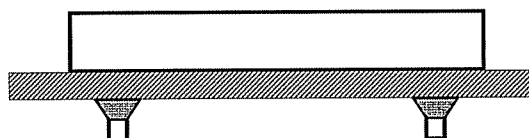

(Side view)

Fig.1.1 Mounting method
(Normal position)