



DATA SHEET		Date	14-Jan-21
Model	AEA600F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Tosu

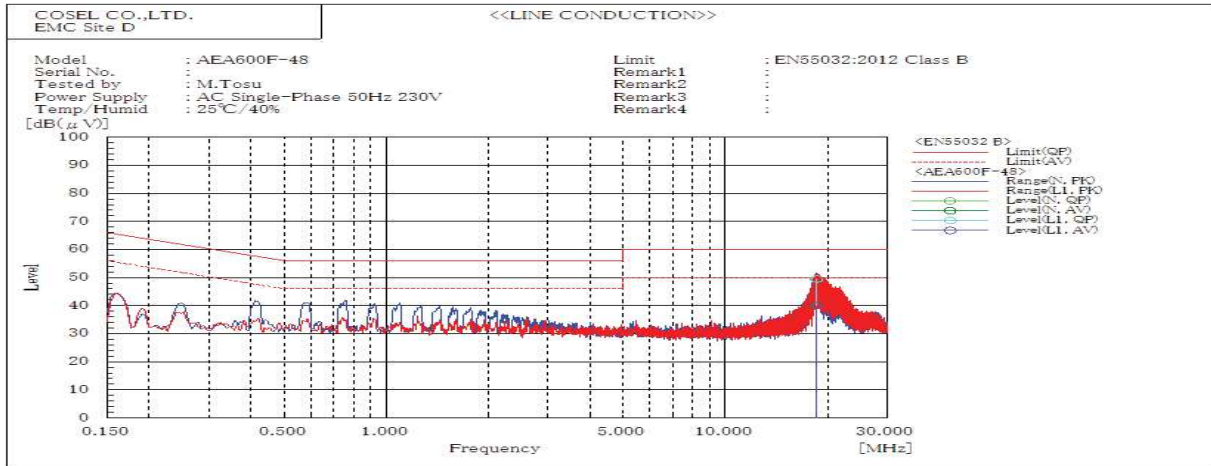


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
18.5	N	49.5	40.1	60	50	10.5	9.9	Pass	
18.626	L1	49.5	40	60	50	10.5	10	Pass	

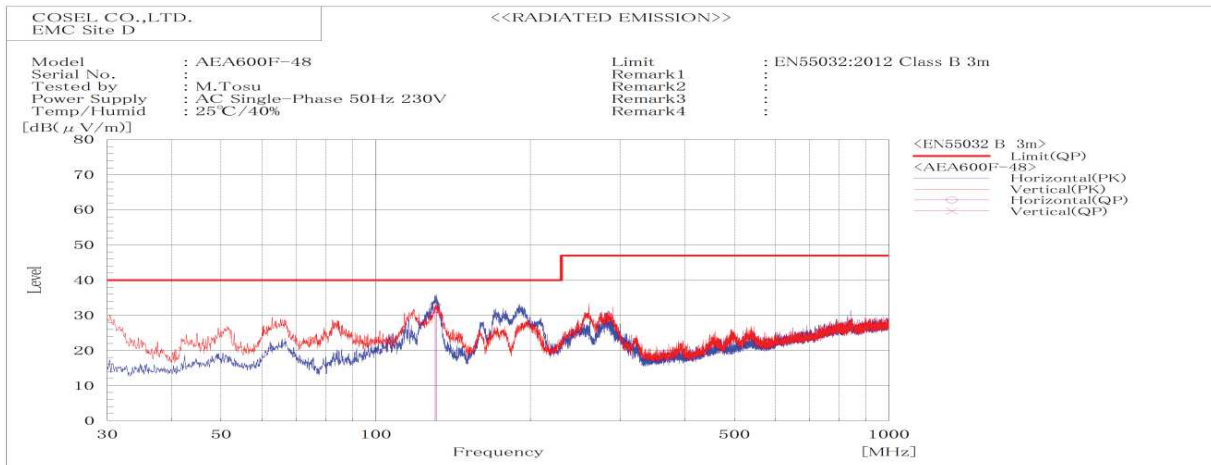


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
131.265	V	Stable	30.9	40	9.1	Pass	128.7	70.5	
130.557	H	Stable	32.9	40	7.1	Pass	199.7	176	

DATA SHEET		Date	14-Jan-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Tosu

### 1. Line conduction

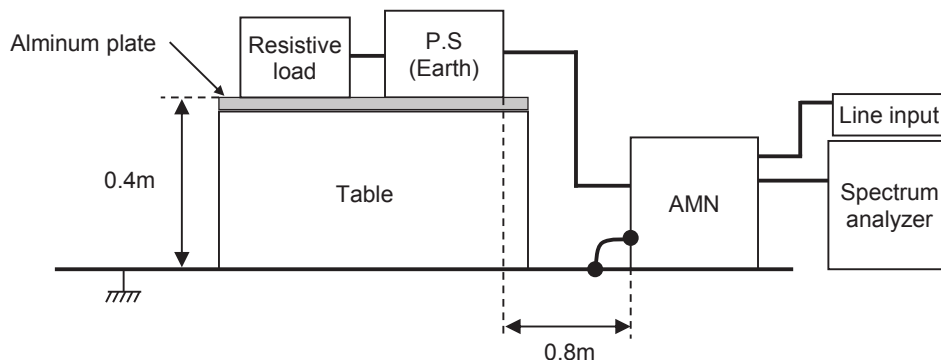

### 2. Radiated emission

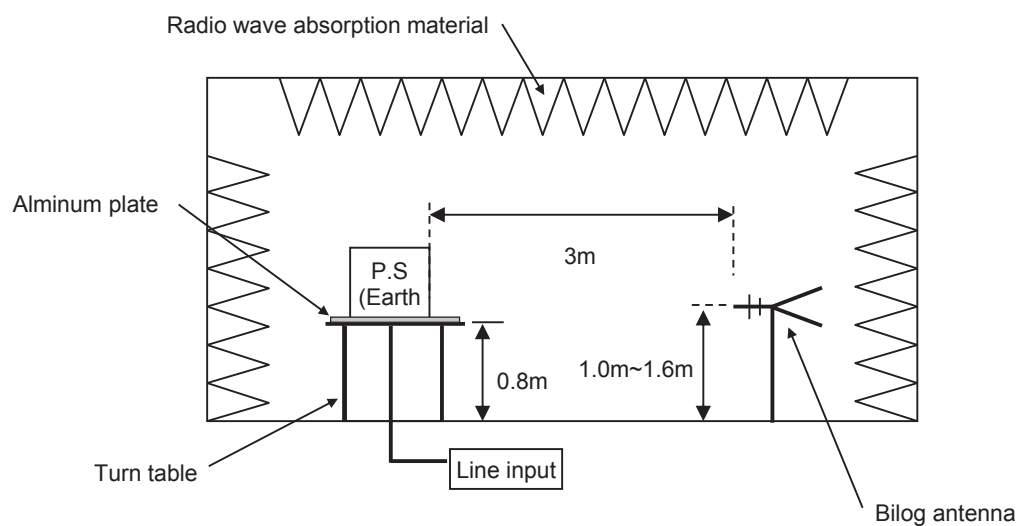


## Conditions

Test : EMI

Model Name : AEA600F

○Photographs of Test Set-Up

### 1.LINE CONDUCTION

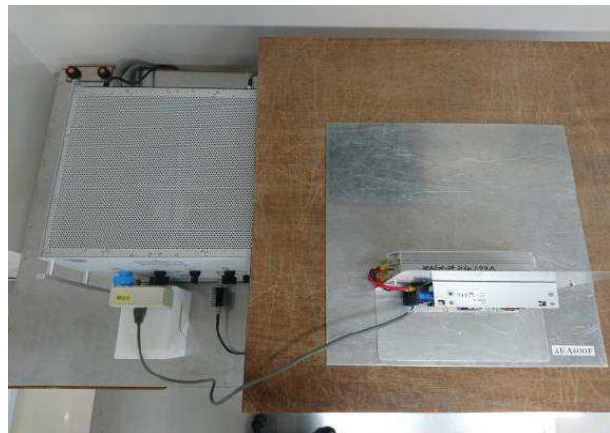

### 2.RADIATED EMISSION

