

Date : Jun.18,2018

Temperature increase of main components

Model: BRDS120

1. Conditions

- (1) Input :DC 12 [V]
- (2) Output :Rated output
- (3) Air flow : 2 [m/s]
- (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase (ΔT)						Rated temp. [°C]	Reference
			[deg]							
			120							
1	Power FET	TR121	112						150	Junction Temp.
2	Power FET	TR122	111						150	Junction Temp.
3	Power FET	TR131	112						150	Junction Temp.
4	Power FET	TR132	111						150	Junction Temp.
5	Power Control Ic	IC301	82						125	Junction Temp.
6	Output Choke(Coil)	L141	79						125	
7	Output Choke(Coil)	L151	79						125	
8										
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19										
20										

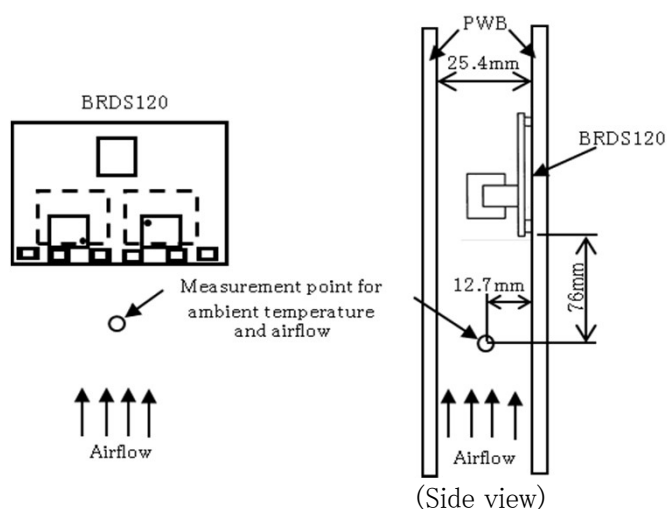


Fig.1.1 Mounting method