

Temperature increase of main components

Model: BRDS60S


1. Conditions

- (1) Input :DC 12 [V]
 (2) Output :Rated output
 (3) Air flow : 1 [m/s]
 (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase (ΔT)						Rated temp. [°C]	Reference
			[deg]							
			60S							
1	Power FET	TR121	76.0						150	Junction Temp.
2	Power FET	TR131	71.0						150	Junction Temp.
3	Power FET	IC301	54.0						125	Junction Temp.
4	Power FET	L141	60.0						125	
5										
6										
7										
8										
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19										
20										

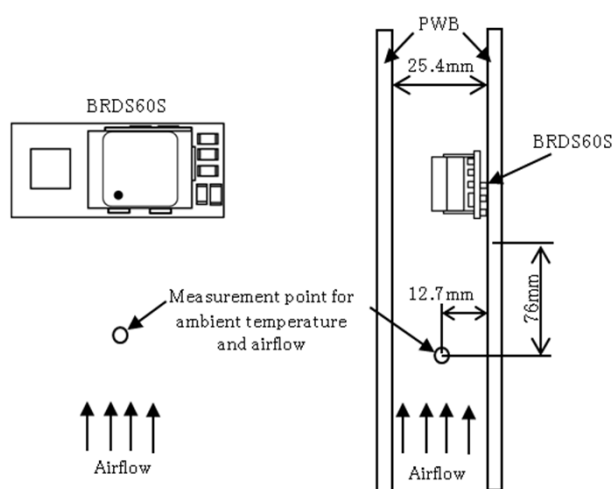

(Side view)

Fig.1.1 Mounting method