



DATA SHEET		Date	29-Mar-19
Model	CHS3002432	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Kobayashi

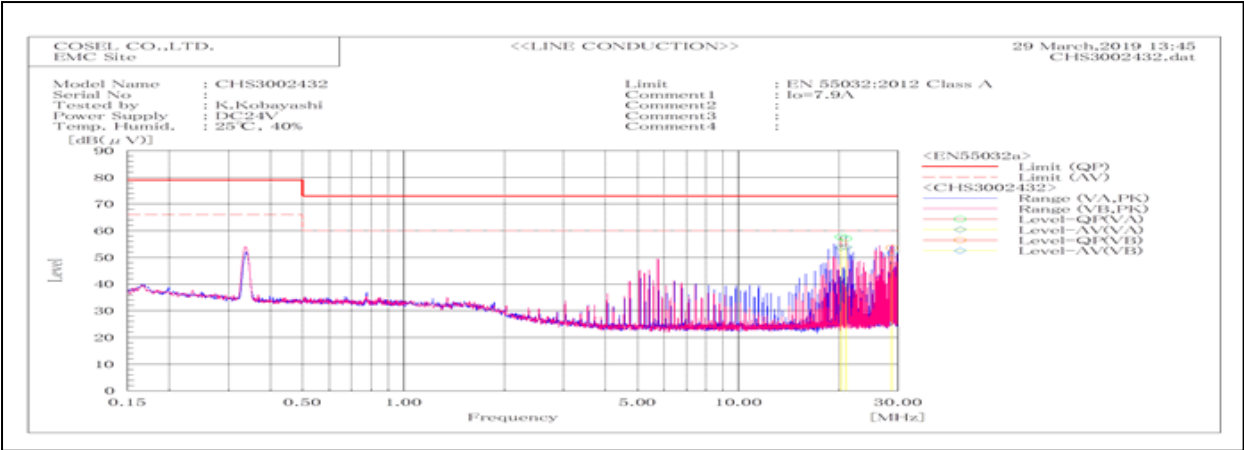


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
20.2632	LA	57.7	53.7	73	60	15.3	6.3	Pass	
20.93515	LA	57.1	53.9	73	60	15.9	6.1	Pass	
28.69615	LB	53.6	51.7	73	60	19.4	8.3	Pass	

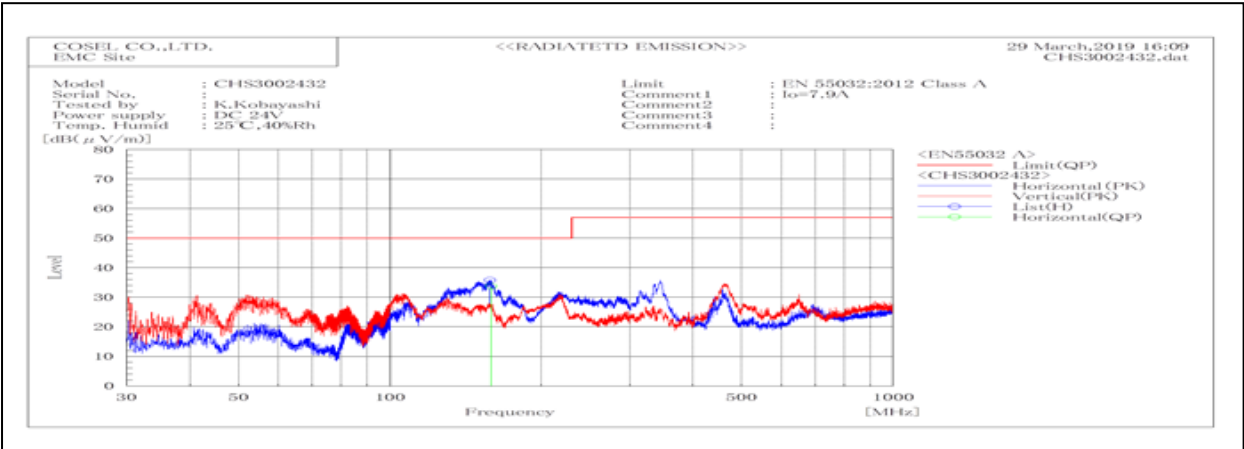


Frequency MHz	Polarization	Stability	Reading dB(μV)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
158.877	H	Stable	33.7	50.0	16.3	Pass	193	234	

DATA SHEET		Date	29-Mar-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Kobayashi

1. Line conduction

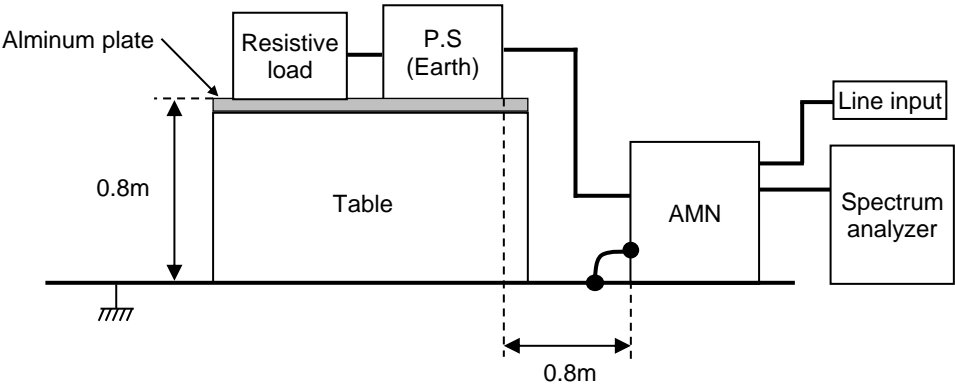

2. Radiated emission

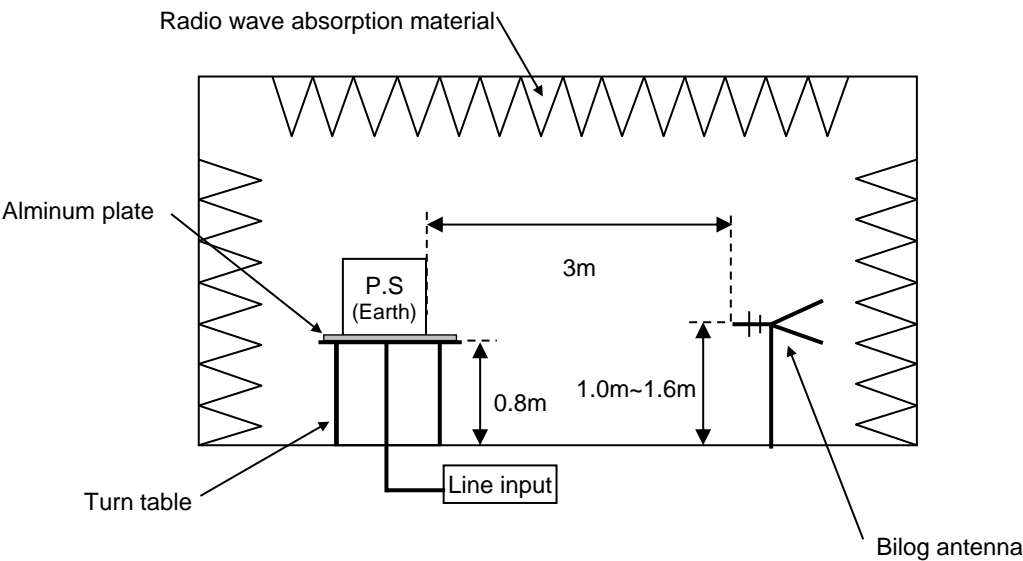

Conditions


Test : EMI  
Model Name : CHS30024□

○Photographs of Test Set-Up

LINE CONDUCTION



RADIATED EMISSION

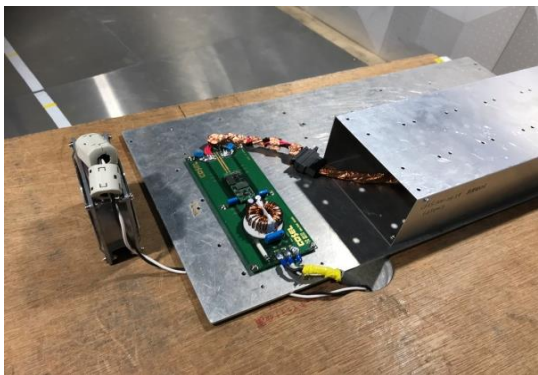

○Testing circuitry

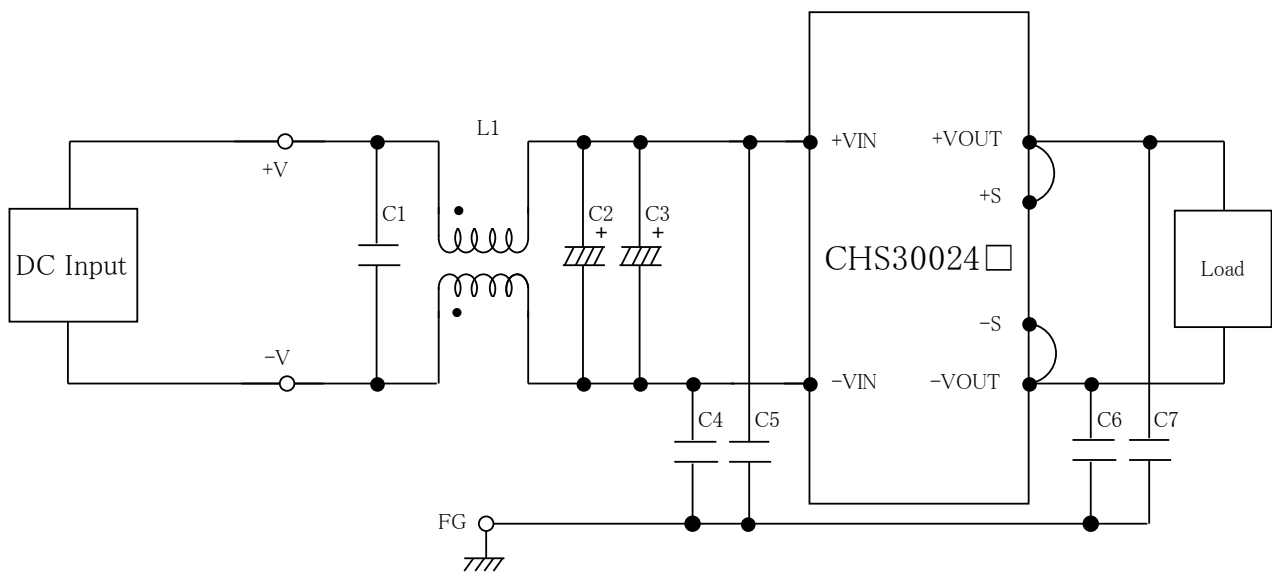


Fig.1 Testing circuitry

- L1 : 1mH SC-20-10JH (TOKIN)
- C1 : 250V 2.2  $\mu$ F FPD22E225J4 (NITSUKO)
- C2,C3 : 50V 330  $\mu$ F PWseries (nichicon)
- C4,C5 : 630V 0.068  $\mu$ F FPD22J683J4 (NITSUKO)
- C6,C7 : 630V 0.033  $\mu$ F FPD22J333J4 (NITSUKO)