

Date : Nov.13,2008

Temperature increase of main components: 主要部品温度上昇

Model : DBS100A/150A

1. Conditions

- (1) Input : DC 45 ~ 160 [V] (DBS100A05/13R8)
 : DC 66 ~ 160 [V] (DBS150A12/15/24)
 (2) Output : Rated output
 (3) Aluminum base plate temp. : 85 [°C] (Fig1.1)

2. Result

The temperature Increase based on the aluminum base plate is shown below.

No.	Parts name	Symbol No.	Increase (ΔT)						Rated temp. [°C]	Reference
			[deg]							
			5V	13.8V	12V	15V	24V			
1	Swiching trsnsistor	TR11	30	29	31	33	29		150	Junction temp.
2	Transformer	T11	14	17	4	15	13		155	
3	Transformer (coil)	T11	25	30	21	20	26		155	
4	Rectified diode(Output)	SS51	29	11	11	14	10		150	Junction temp.
5	Output choke(coil)	L51	14	16	14	25	19		130	
6	Power control IC	IC101	31	23	12	14	18		150	Junction temp.
7										
8										
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19										
20										

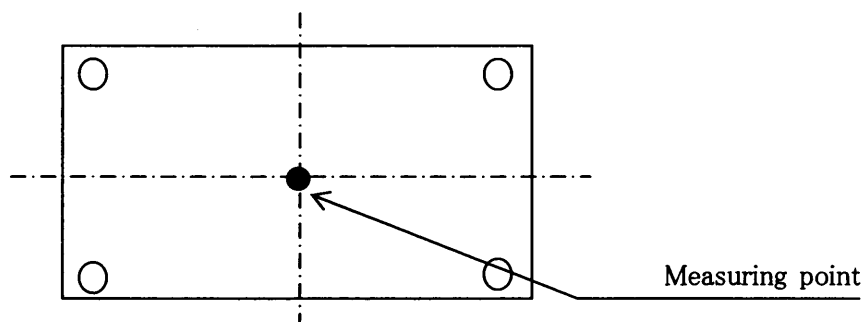


Fig.1.1 Measuring point of aluminum base plate temperature.