

Temperature increase of main components

Model: DHS100A

1. Conditions

- (1) Input : DC 60~160 [V]
 (2) Output : Rated output
 (3) Aluminum base plate temp. : 100 [°C] (Fig1.1)
 (4) Ambient temp. : 25 [°C]

2. Result

The temperature Increase based on the aluminum base plate is shown below.

No.	Parts name	Symbol No.	Increase (ΔT)						Rated temp. [°C]	Reference
			[deg]							
			5	12	15	24				
1	Switching transistor	TR11	11	14	16	17			150	Junction temp.
2	Rectified diode(Output)	SS51	20	10	8	9			150	Junction temp.
3	Rectified diode(Output)	SS52	23	15	12	10			150	Junction temp.
4	Transformer(coil)	T11	8	14	18	24			155	
5	Output choke(coil)	L51	15	20	14	16			155	※1
6										
7										
8										
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19										
20										

※1 Rated temp. 130°C only DHS100A05

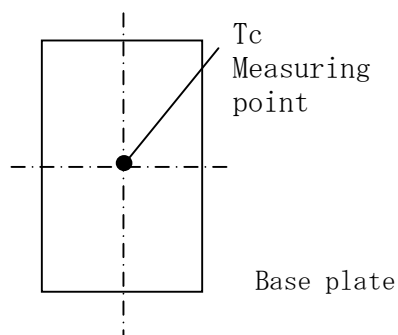


Fig.1.1 Measuring point of aluminum base plate temperature.