

TEST DATA OF EAP-10-□□□/ESP-10-□□□

Noise Filter

Nov. 30, 2010

Approved by : Toshio Watanabe
Toshio Watanabe Design Manager

Prepared by : Tadayuki Noda
Tadayuki Noda Design Engineer

COSEL CO.,LTD.





CONTENTS

1.Attenuation Characteristics	1
2.Pulse Attenuation Characteristics	6
3.Leakage Current	9
4.Figure of Testing Circuitry	10

(Final Page 11)



COSEL


Model	EAP-10-□□□/ESP-10-□□□	Temperature Testing Circuitry Figure A	25°C
Item	Attenuation Characteristics		
Object	—		

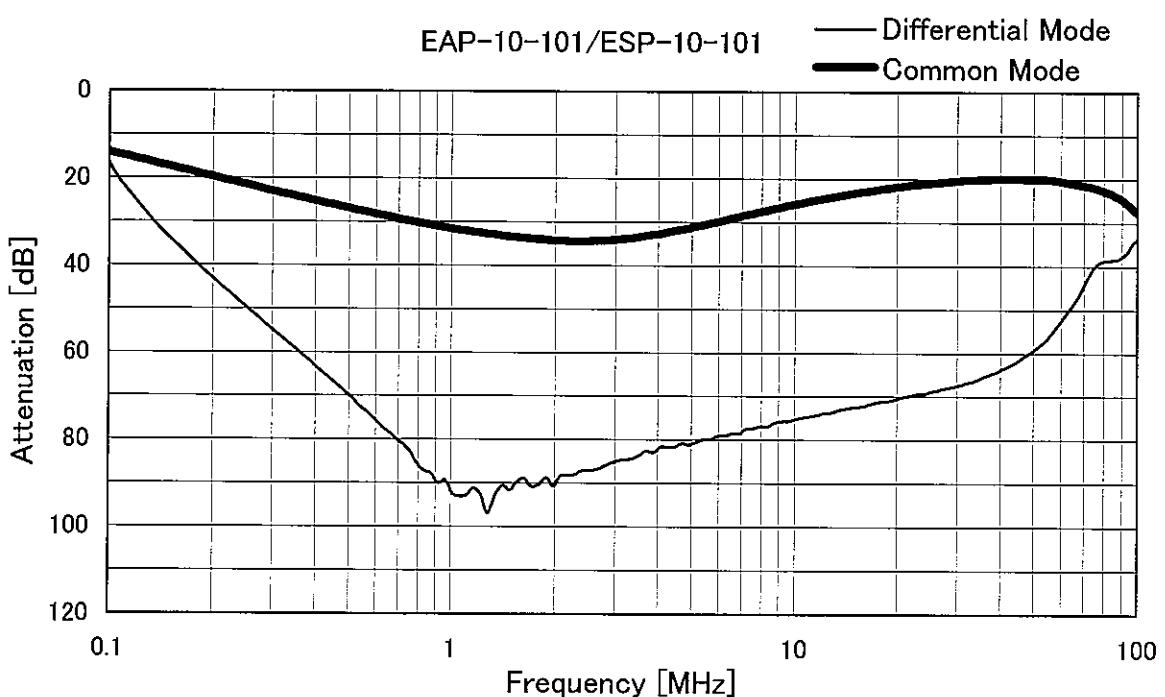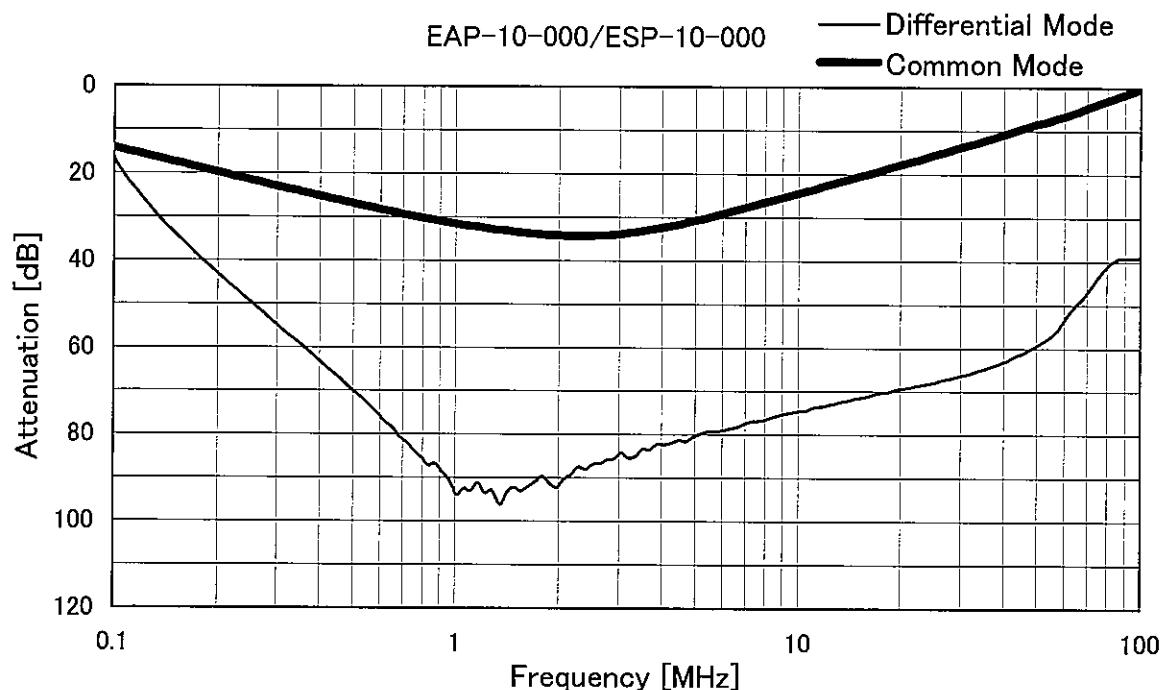

COSEL



Model	EAP-10-□□□/ESP-10-□□□	Temperature Testing Circuitry	25°C
Item	Attenuation Characteristics		Figure A
Object	—		

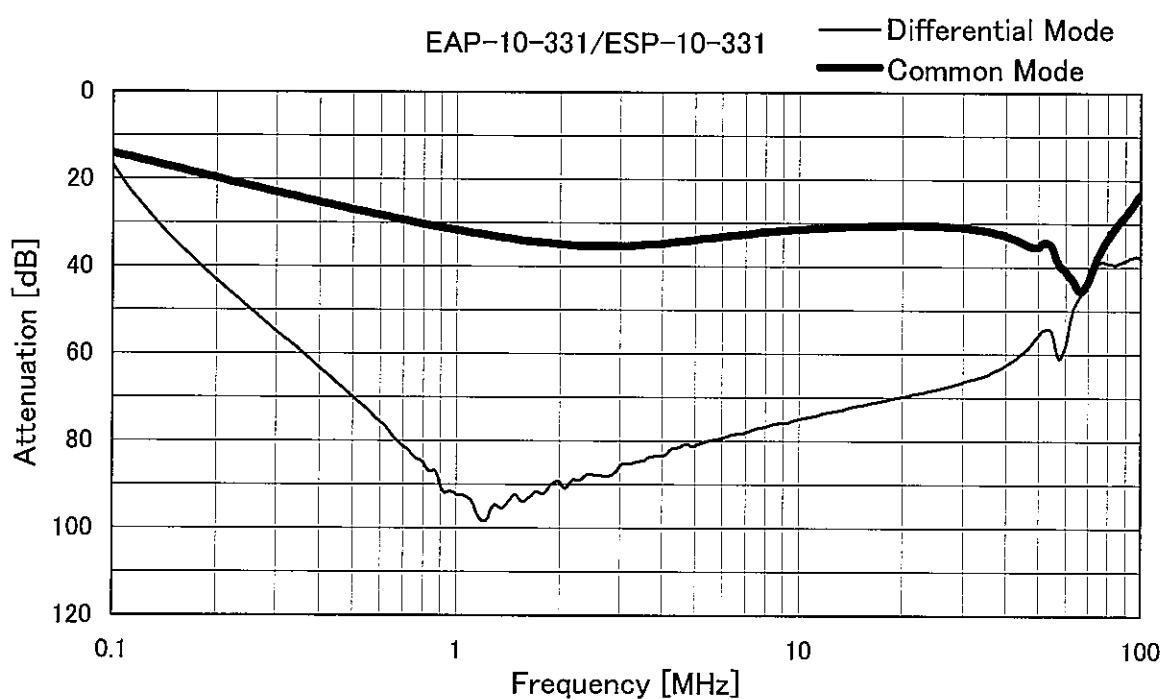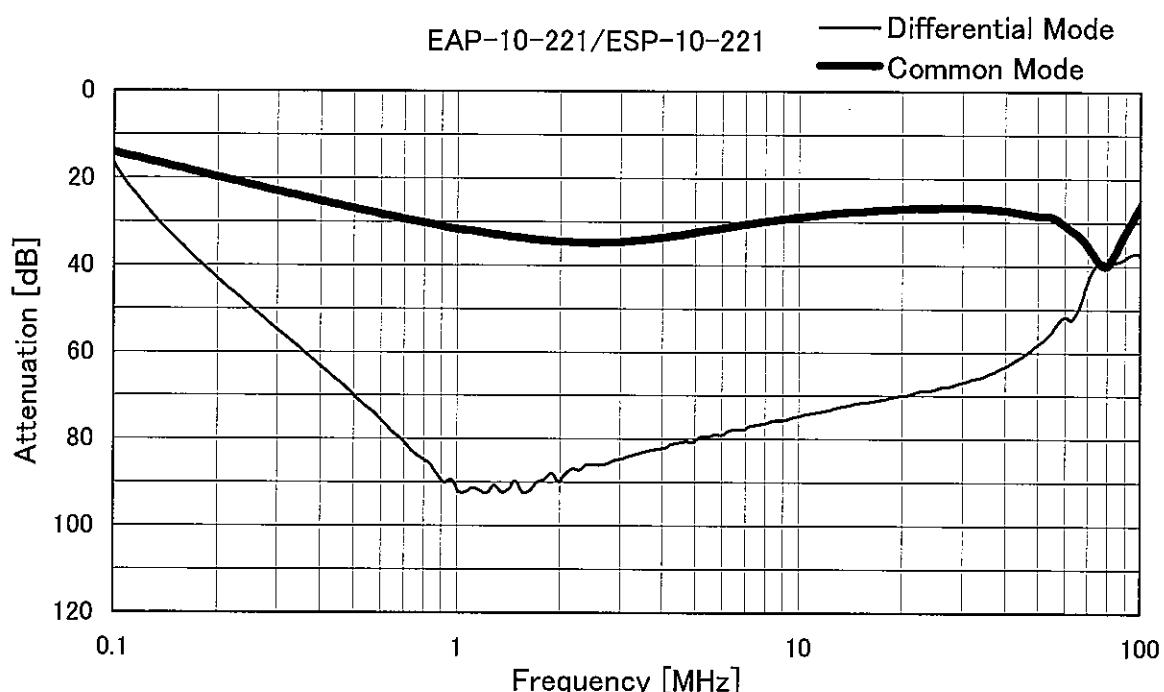

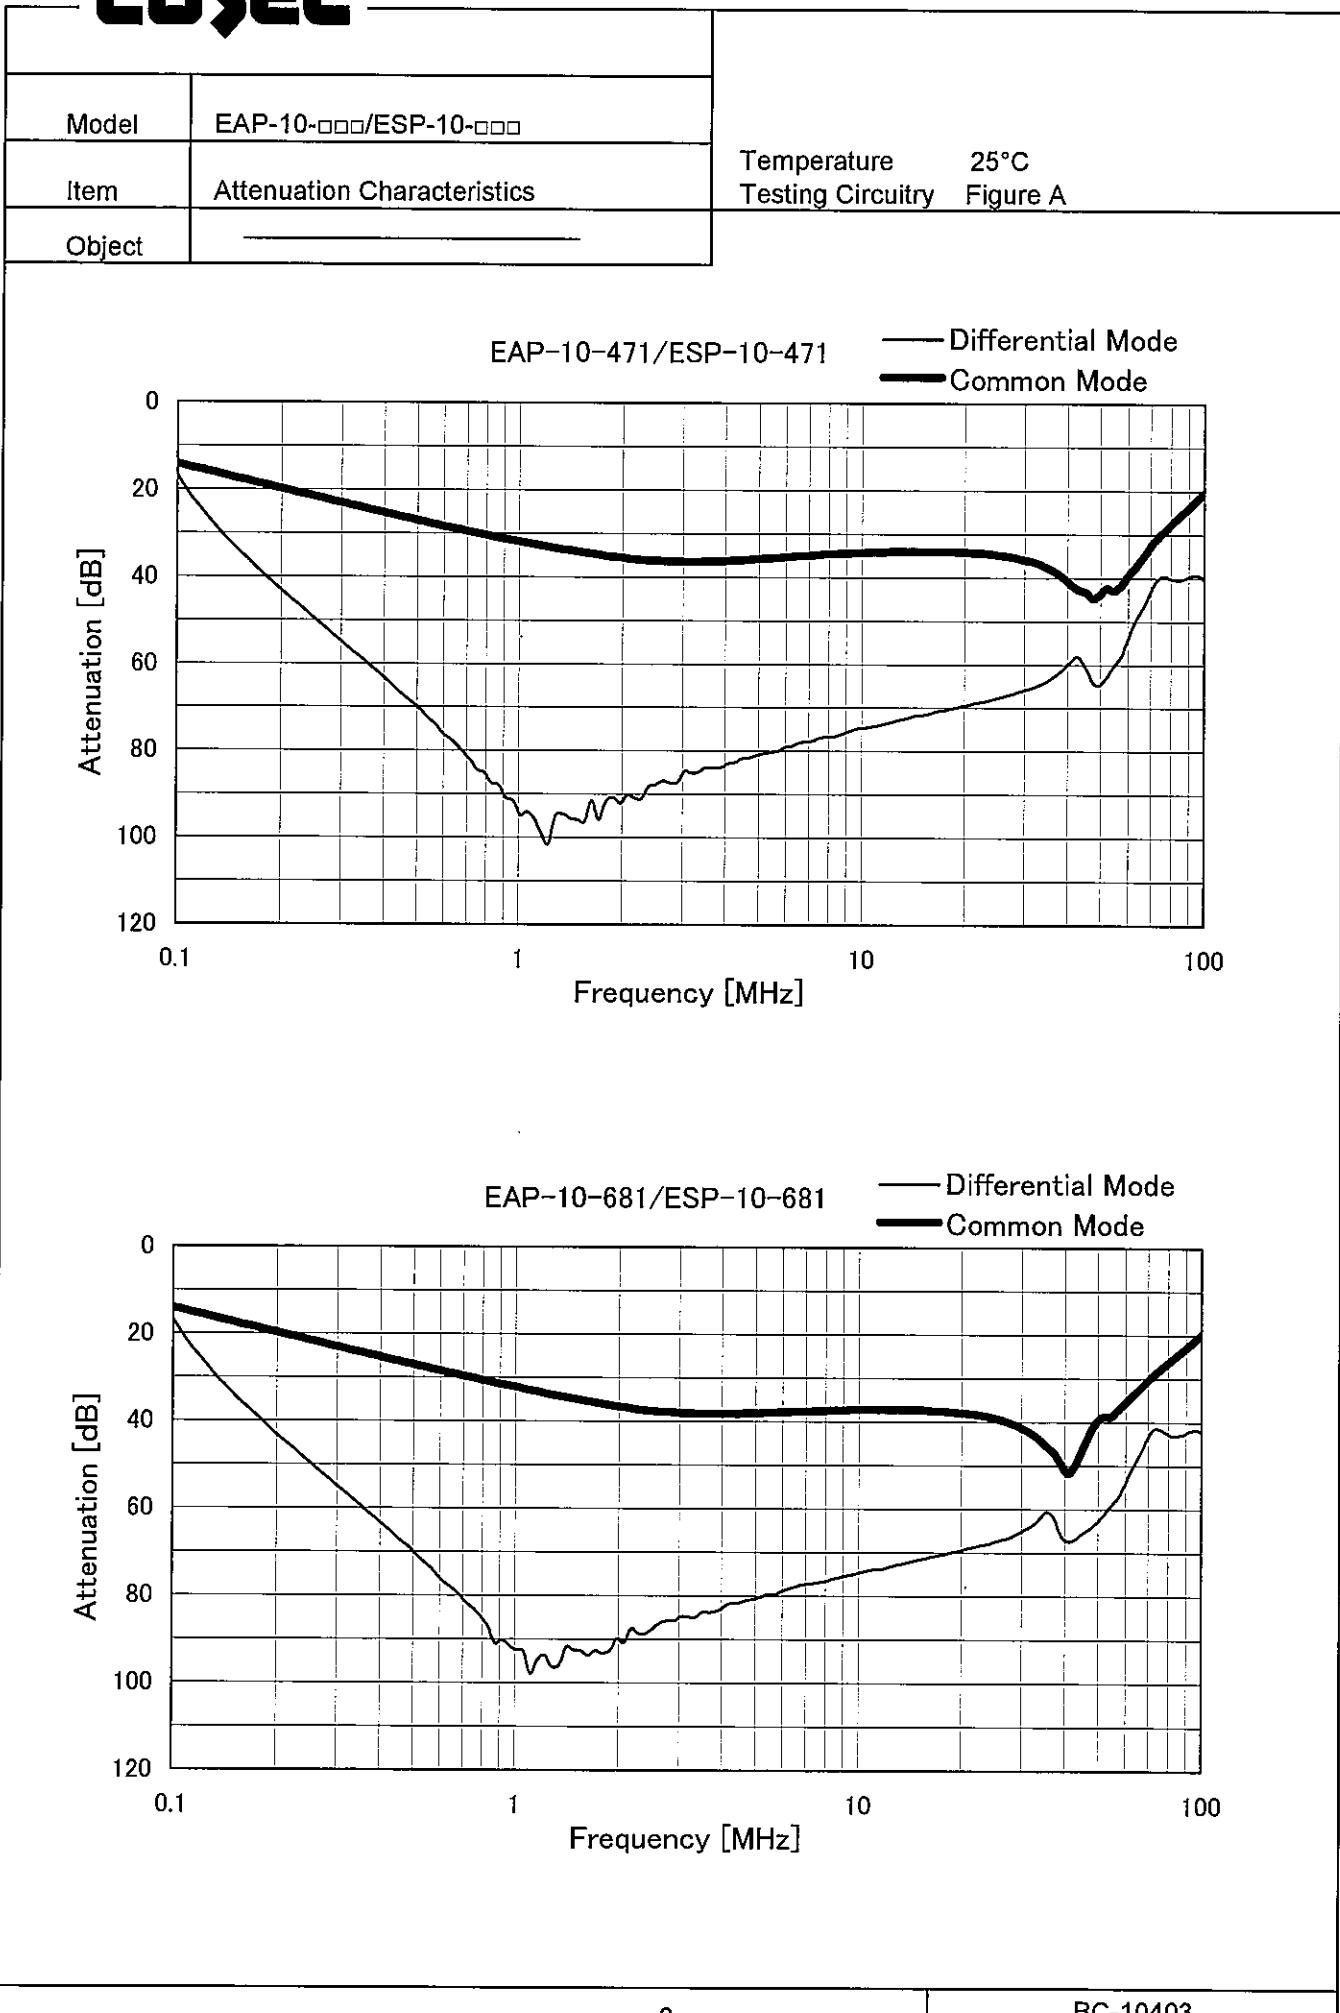
COSEL

COSEL

Model	EAP-10-□□□/ESP-10-□□□	Temperature Testing Circuitry	25°C Figure A
Item	Attenuation Characteristics		
Object	_____		

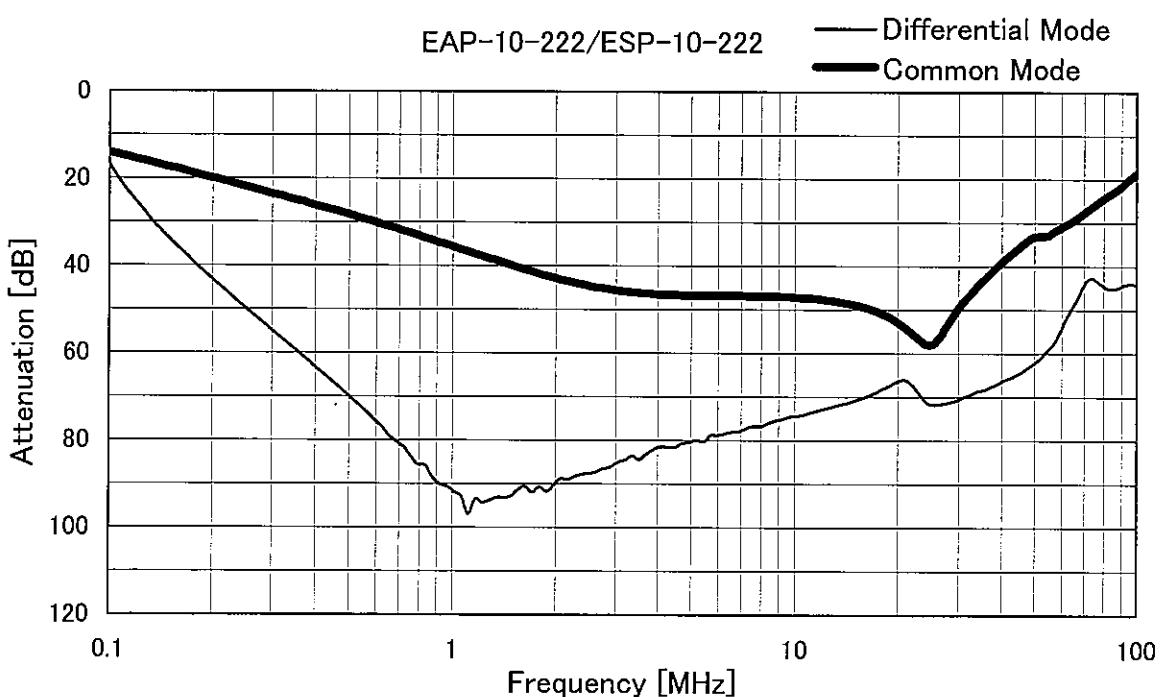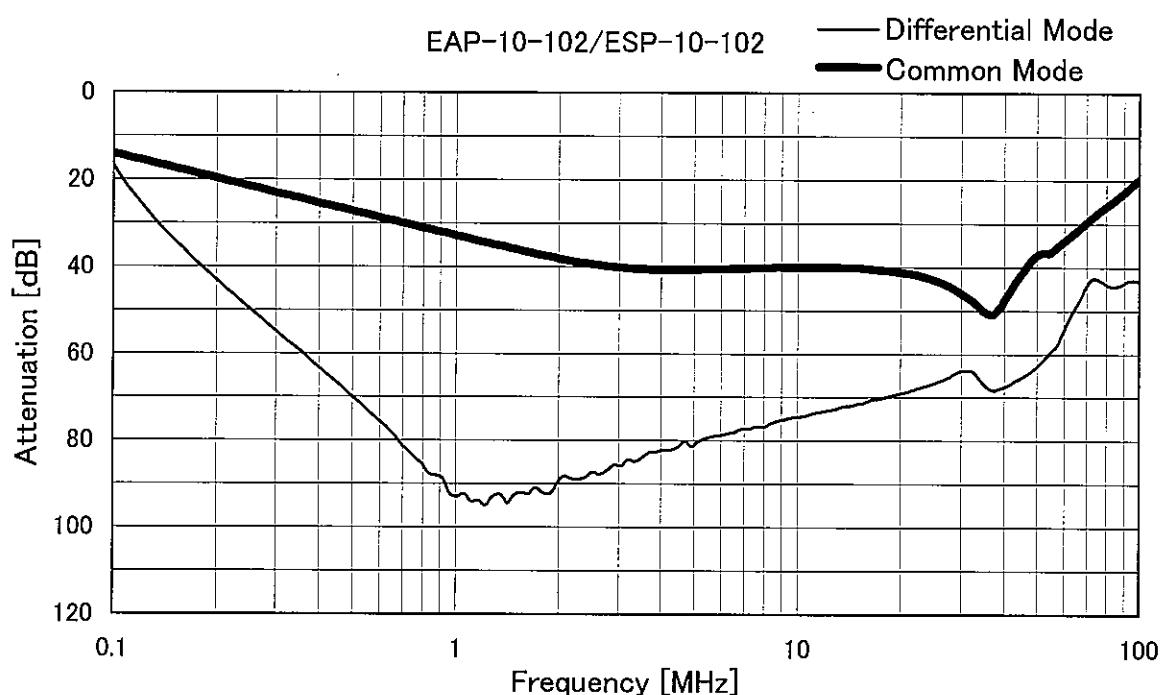

COSEL

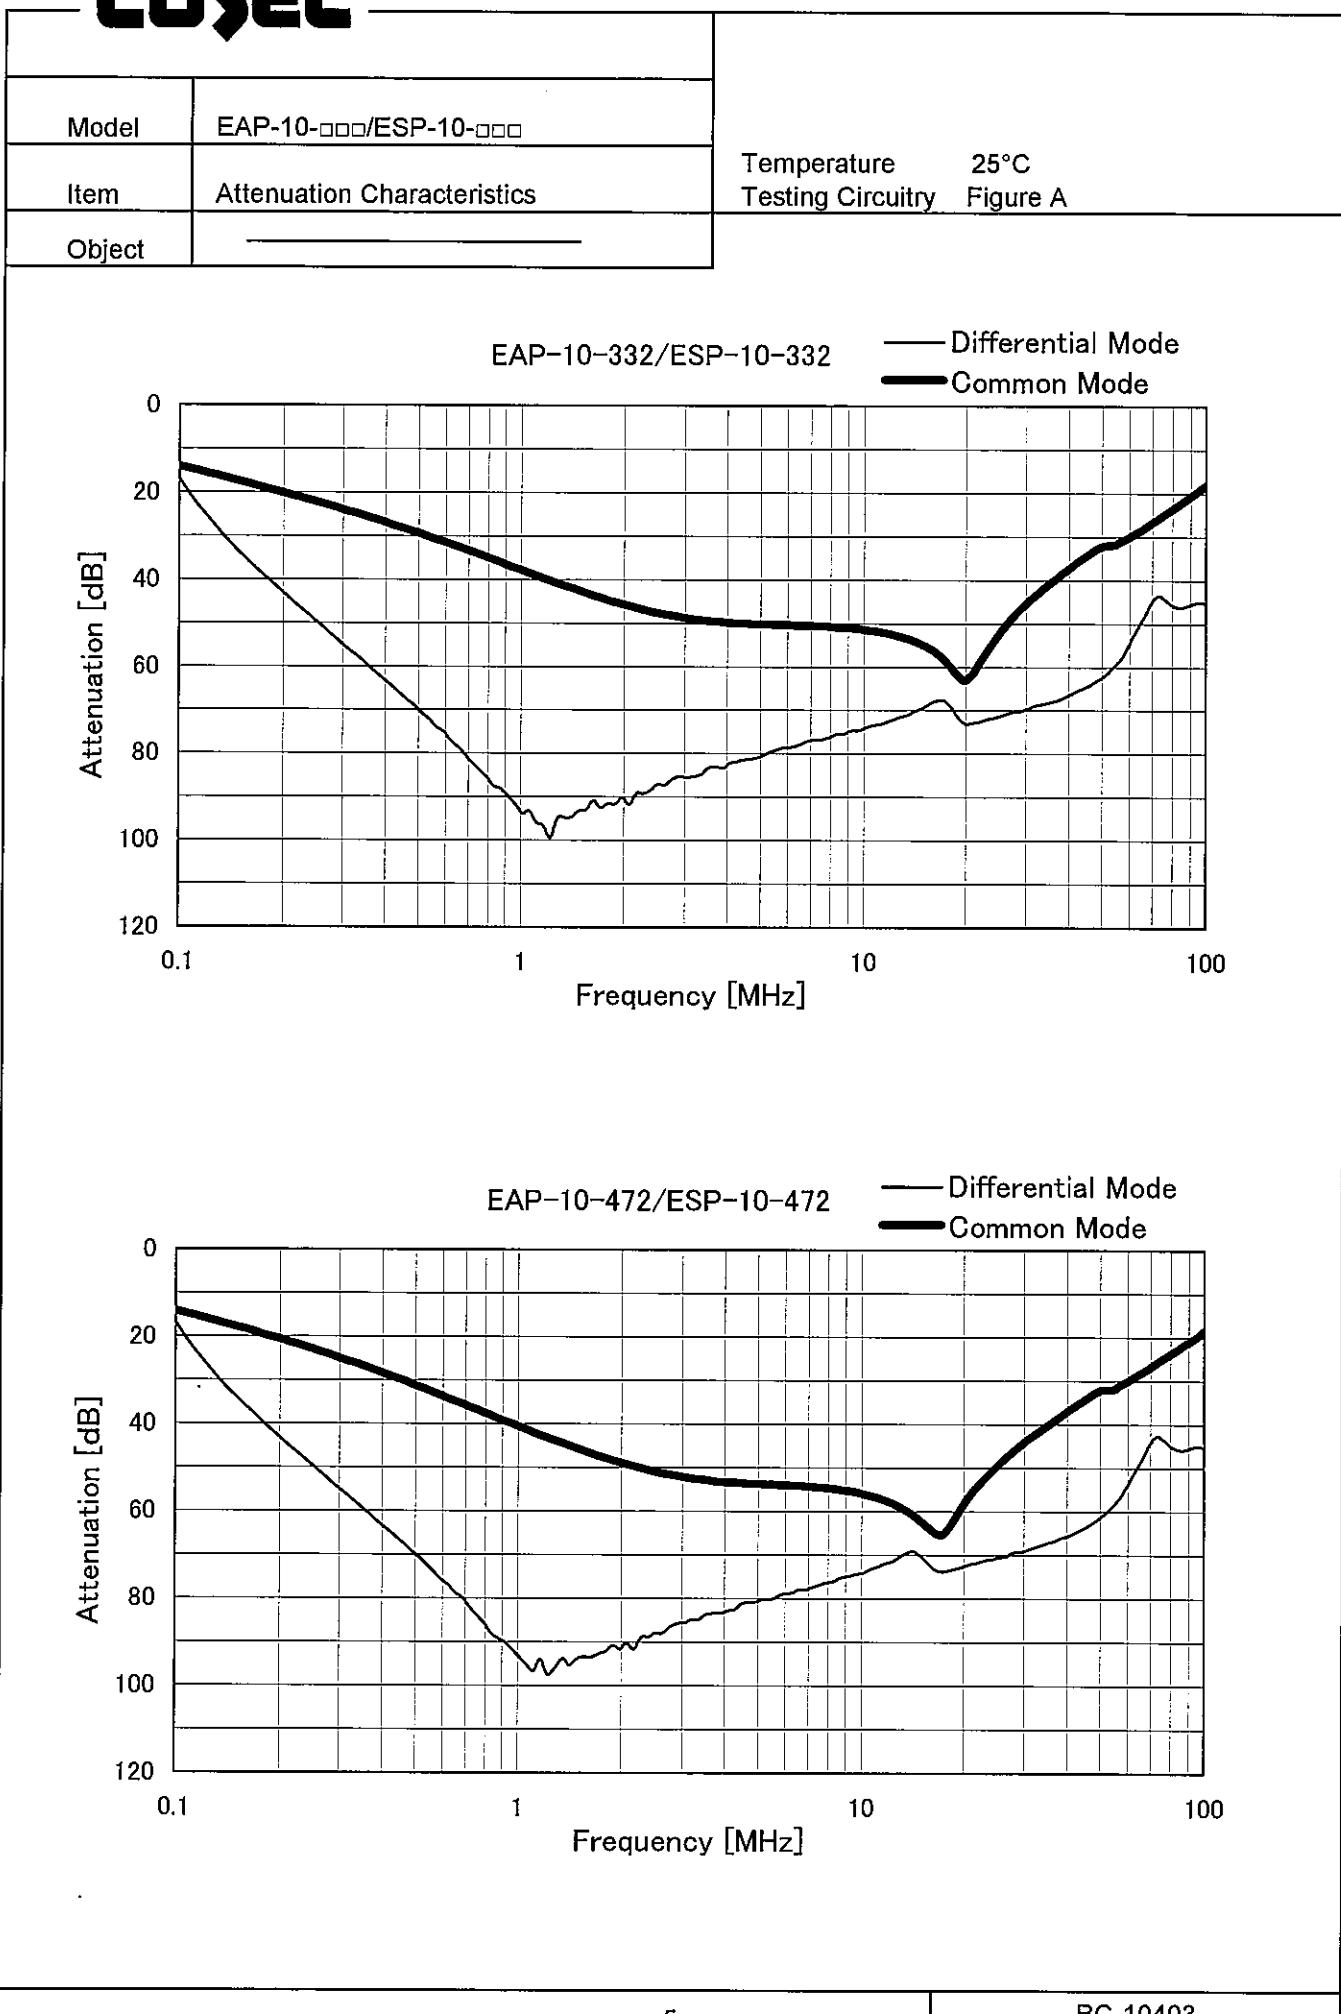





COSEL


Model EAP-10-□□□/ESP-10-□□□

Temperature 25°C
Testing Circuitry Figure B

Item Pulse Attenuation Characteristics

Object _____

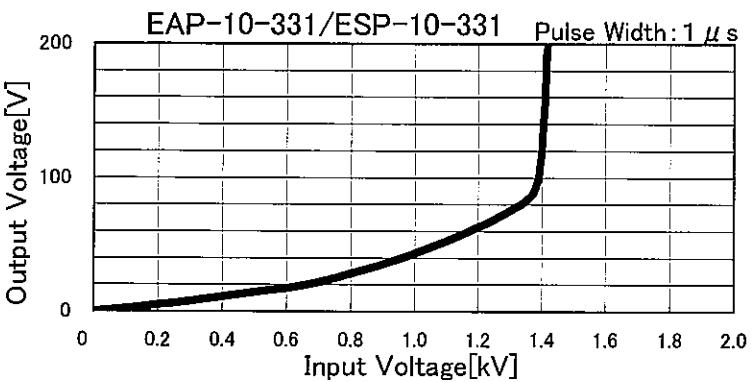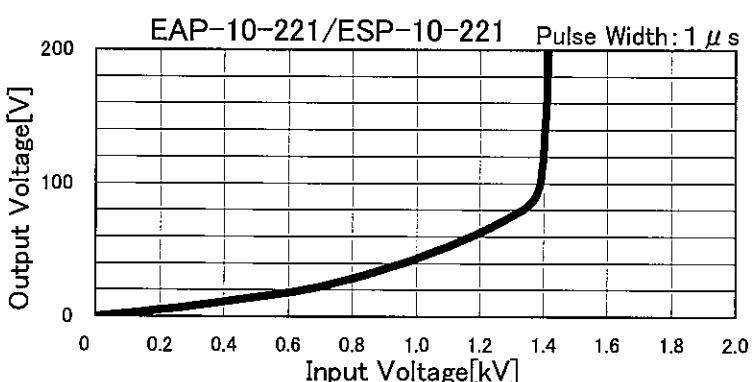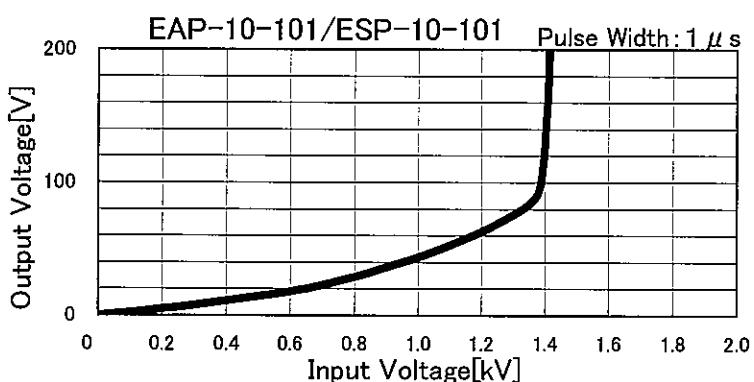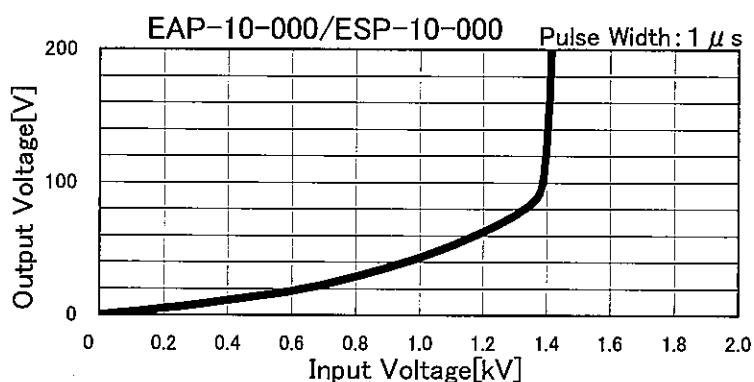

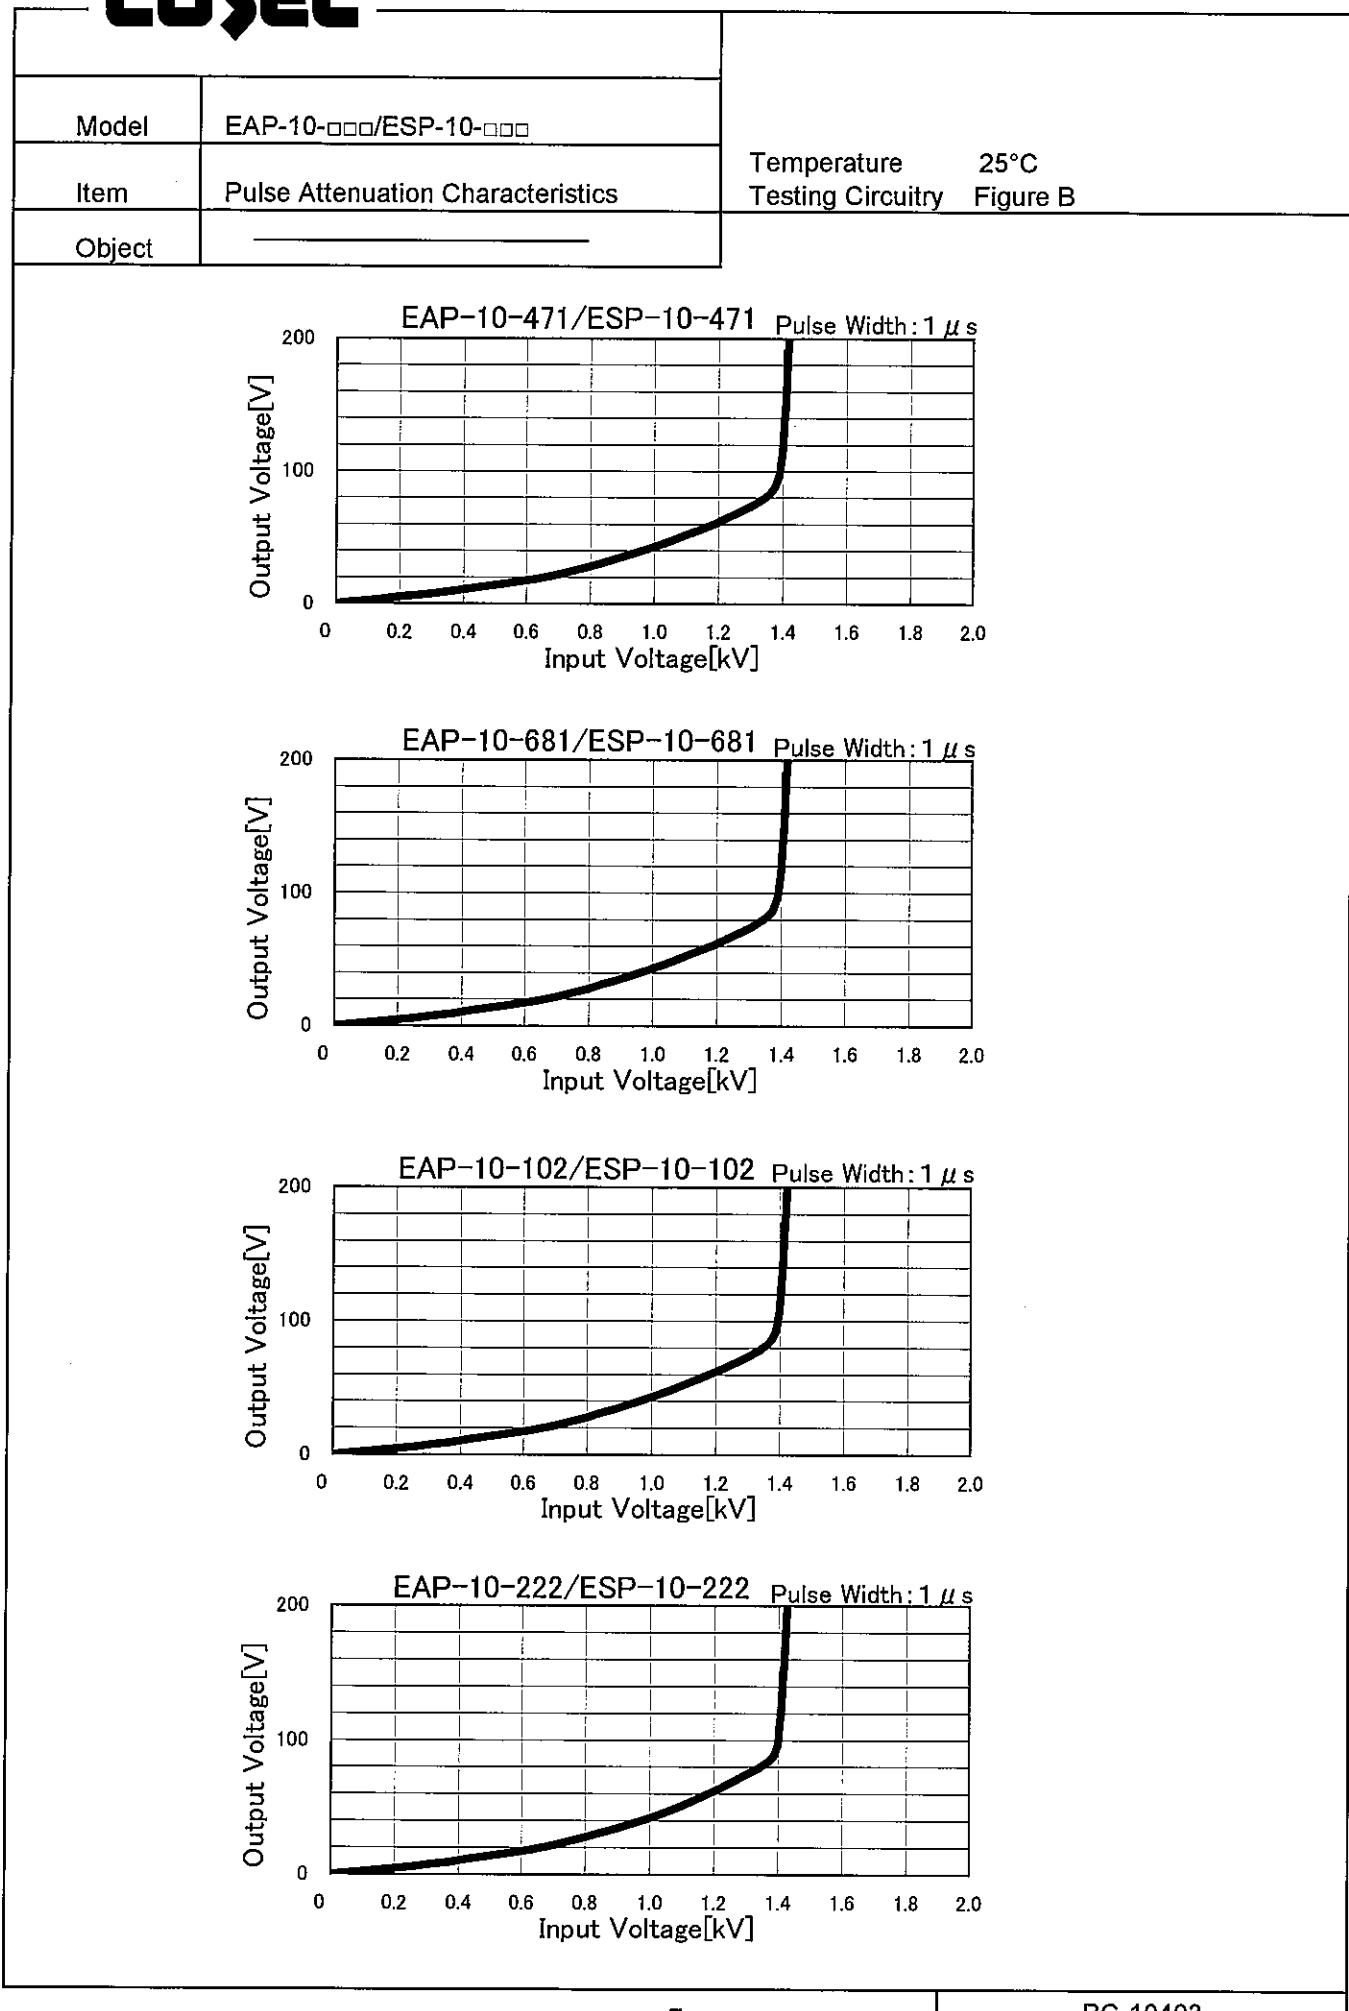COSEL

COSEL

Model	EAP-10-□□□/ESP-10-□□□	Temperature Testing Circuitry Figure B
Item	Pulse Attenuation Characteristics	
Object	—	

EAP-10-332/ESP-10-332 Pulse Width: 1 μ s

Output Voltage[V]

Input Voltage[kV]

EAP-10-472/ESP-10-472 Pulse Width: 1 μ s

Output Voltage[V]

Input Voltage[kV]



Model	EAP-10-□□□/ESP-10-□□□	Temperature Testing Circuitry Figure C	25°C
Item	Leakage Current		
Object	_____		

1. Results


[mA]

Model	Standards	Input Volt.				Note
		100 [V]	125 [V]	230 [V]	250 [V]	
EAP-10-000 ESP-10-000	UL1283	0.002	0.002	0.004	0.005	
EAP-10-101 ESP-10-101	UL1283	0.006	0.007	0.013	0.015	
EAP-10-221 ESP-10-221	UL1283	0.011	0.013	0.025	0.028	
EAP-10-331 ESP-10-331	UL1283	0.015	0.019	0.038	0.042	
EAP-10-471 ESP-10-471	UL1283	0.023	0.030	0.061	0.069	
EAP-10-681 ESP-10-681	UL1283	0.031	0.040	0.082	0.093	
EAP-10-102 ESP-10-102	UL1283	0.044	0.056	0.110	0.120	
EAP-10-222 ESP-10-222	UL1283	0.090	0.120	0.230	0.250	
EAP-10-332 ESP-10-332	UL1283	0.130	0.170	0.340	0.370	
EAP-10-472 ESP-10-472	UL1283	0.190	0.240	0.480	0.520	

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

COSEL

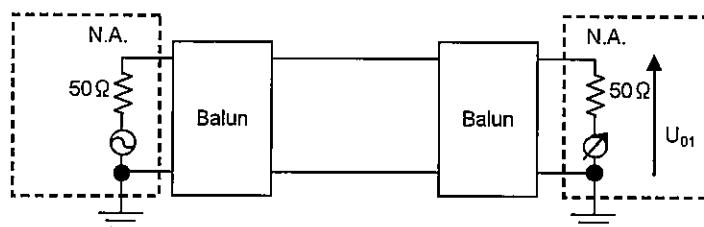

Attenuation = $20\log(U_{01}/U_{02})$ [dB]
 U_{01} : Voltage in state without filters
 U_{02} : Voltage in state which added filters
N.A. : Network Analyzer


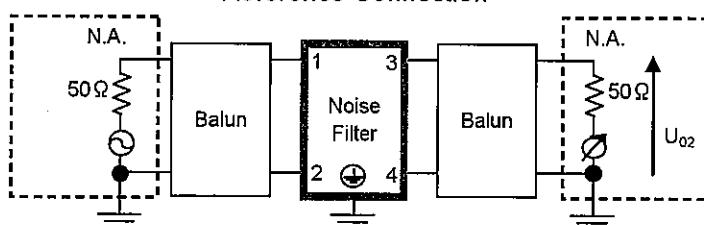


Figure A - 1 Differential mode attenuation measurement

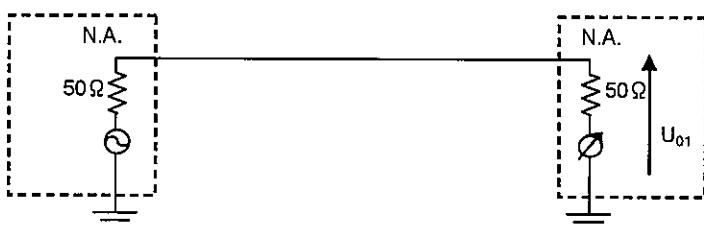

Attenuation = $20\log(U_{01}/U_{02})$ [dB]
 U_{01} : Voltage in state without filters
 U_{02} : Voltage in state which added filters
N.A. : Network Analyzer

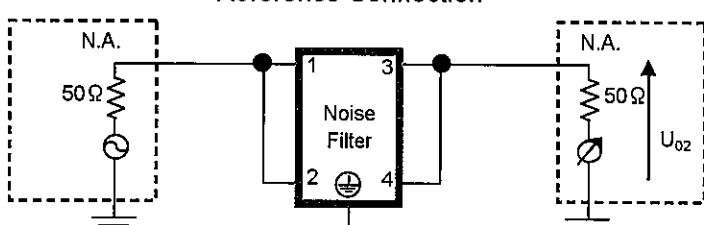


Figure A - 2 Common mode attenuation measurement

COSEL

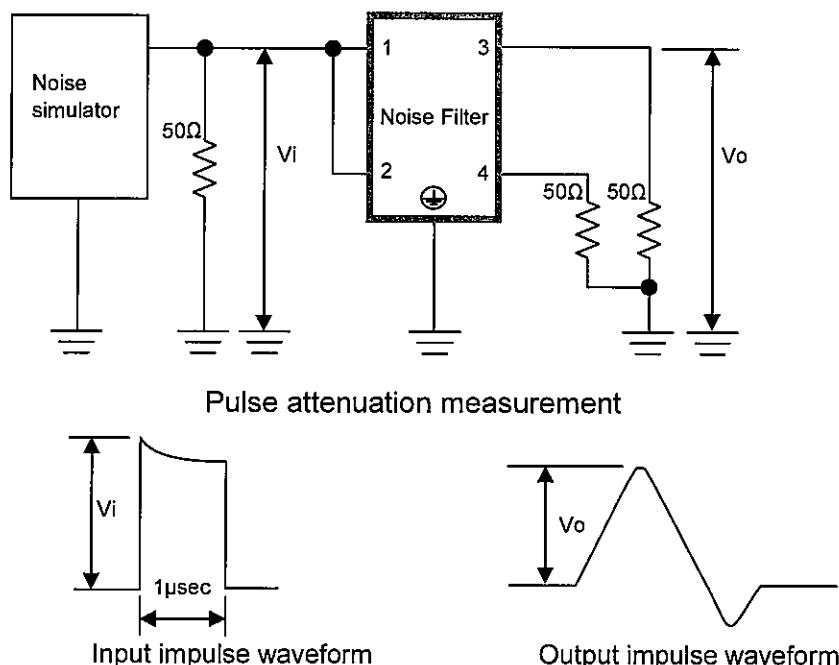


Figure B Pulse attenuation measurement

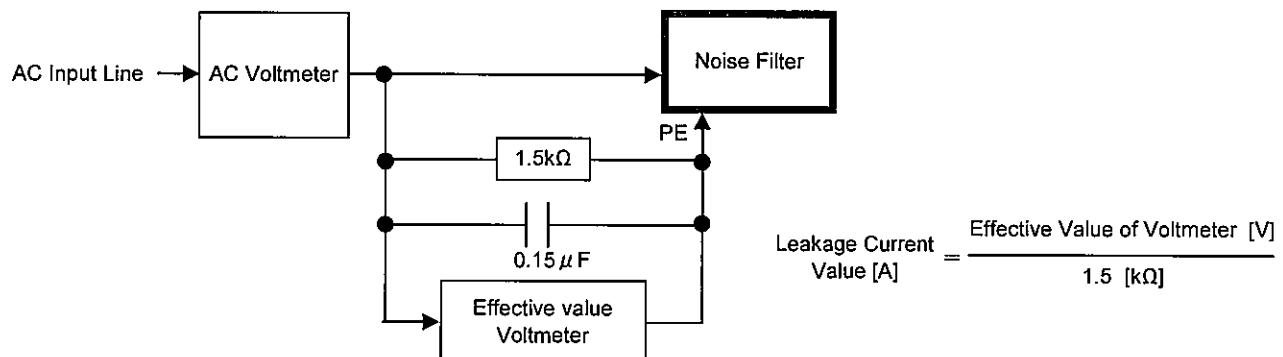


Figure C Leakage current measurement (UL1283)