



DATA SHEET		Date	11-May-18
Model	GHA300F-48-SNF	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

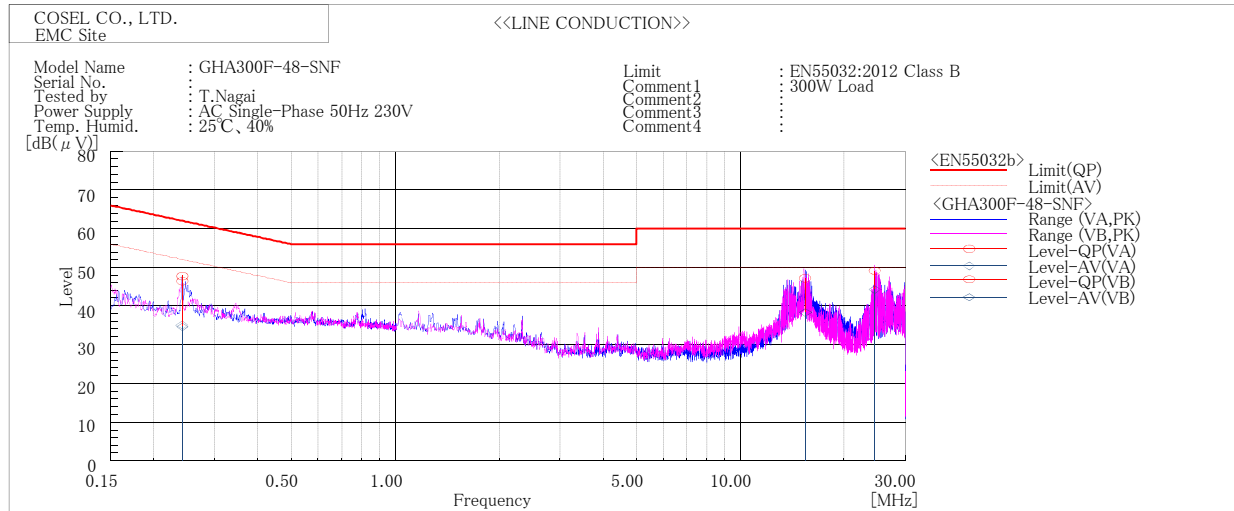


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.24127	VA	47.8	35.1	62.1	52.1	14.3	17	Pass	
0.24153	VB	46.4	34.6	62	52	15.6	17.4	Pass	
15.4484	VA	47.2	38.3	60	50	12.8	11.7	Pass	
24.5552	VB	49.1	44.2	60	50	10.9	5.8	Pass	

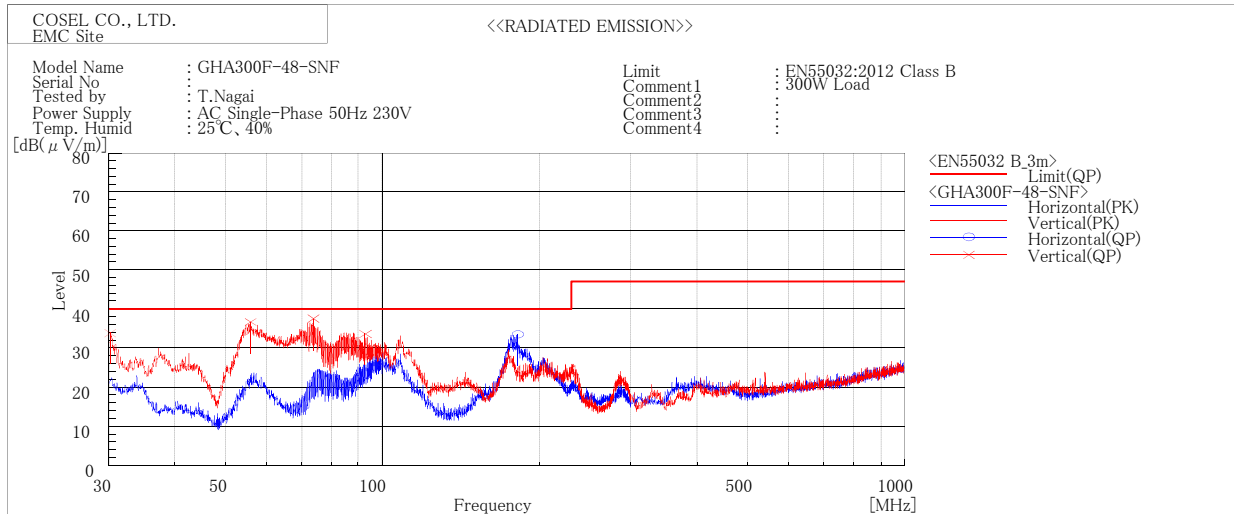

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
30.260	V	Stable	30.0	40.0	10.0	Pass	102	306	
56.014	V	Stable	32.3	40.0	7.7	Pass	103	198	
73.609	V	Stable	33.9	40.0	6.1	Pass	119	322	
92.700	V	Stable	29.9	40.0	10.1	Pass	102	304	
181.167	H	Stable	27.8	40.0	12.2	Pass	156	259	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

1. Line conduction

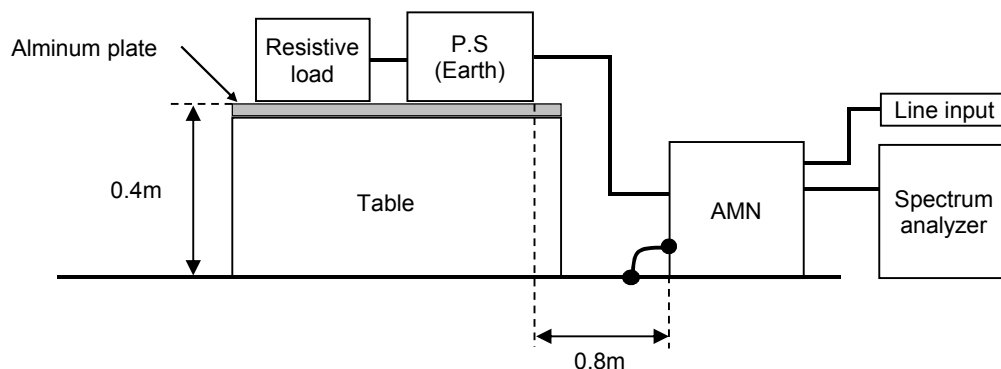

2. Radiated emission

