



DATA SHEET		Date	11-May-18
Model	GHA500F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

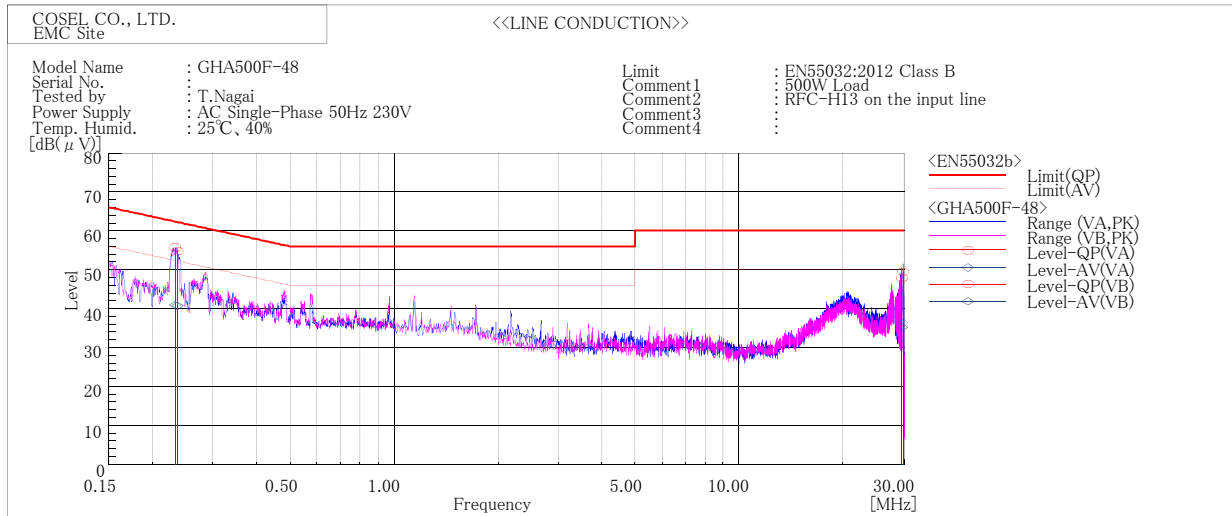


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.23288	VB	55.7	40.9	62.3	52.3	6.6	11.4	Pass	
0.23629	VA	54.8	40.7	62.2	52.2	7.4	11.5	Pass	
29.6431	VA	47.9	35.2	60	50	12.1	14.8	Pass	
29.85715	VB	49.5	36.4	60	50	10.5	13.6	Pass	

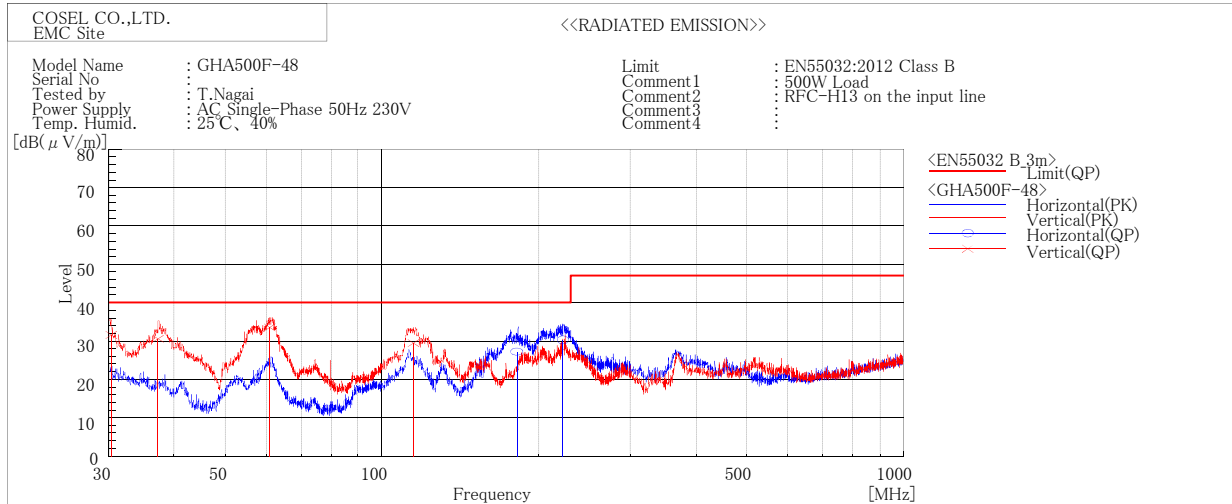

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
30.258	V	Stable	31.6	40.0	8.4	Pass	100	287	
37.178	V	Stable	30.6	40.0	9.4	Pass	102	163	
60.874	V	Stable	33.6	40.0	6.4	Pass	101	168	
114.879	V	Stable	29.5	40.0	10.5	Pass	102	178	
181.486	H	Stable	27.2	40.0	12.8	Pass	157	169	
222.510	H	Stable	30.3	40.0	9.7	Pass	136	27	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

1. Line conduction

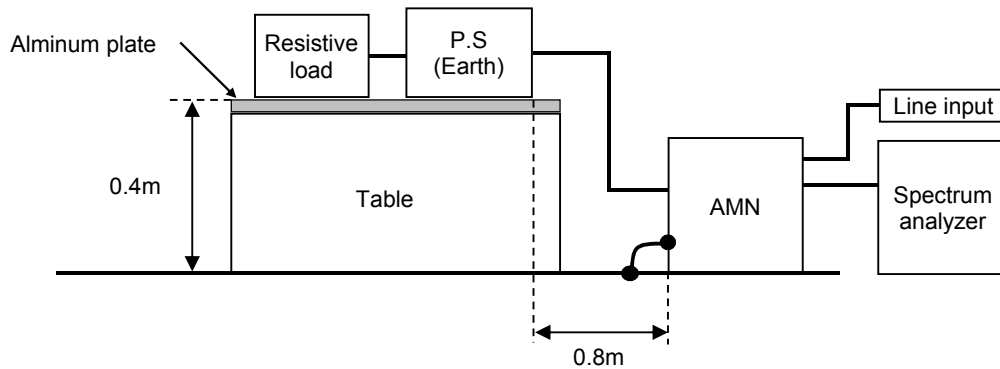

2. Radiated emission

